

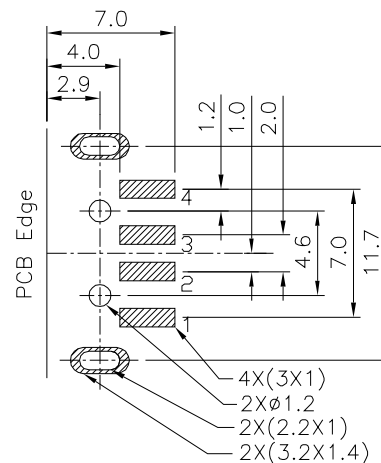
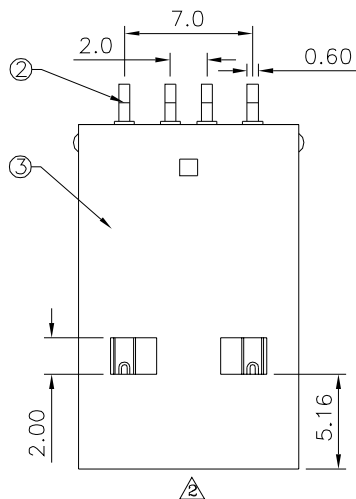
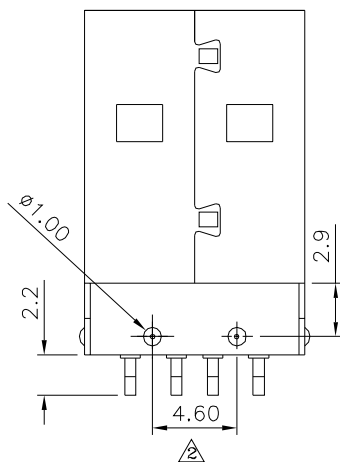


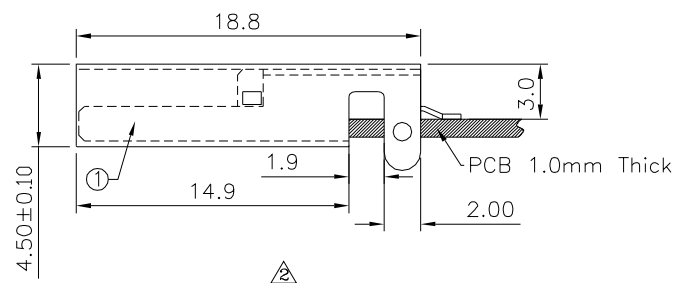

Recommended P.C.B. Layout(Bottom View)



SPECIFICATION

Rated Voltage And Current:1.5A At 250V AC Min.
Dielectric Withstanding Voltage:
750V AC RMS For 1 Minute(Rev. 1.1)
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 500V DC
Durability (Life Test):1500 Cycles
Insertion Force:35N Max.
Extraction Force:10N Min.
RoHS Compliant

No.	Description	Q'ty	Material	Remark
①	Housing	1	PA9T+G.F.	Black
②	Terminal	4	Brass	Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
③	Shell	1	Brass	Nickel Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21379

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
②	A2	Modify Data	HZF	06/26/2018
①	A1	Modify Data	HZF	05/18/2009
①	A0	NEW RELEASE		

SCALE

NONE

REV.

A2