


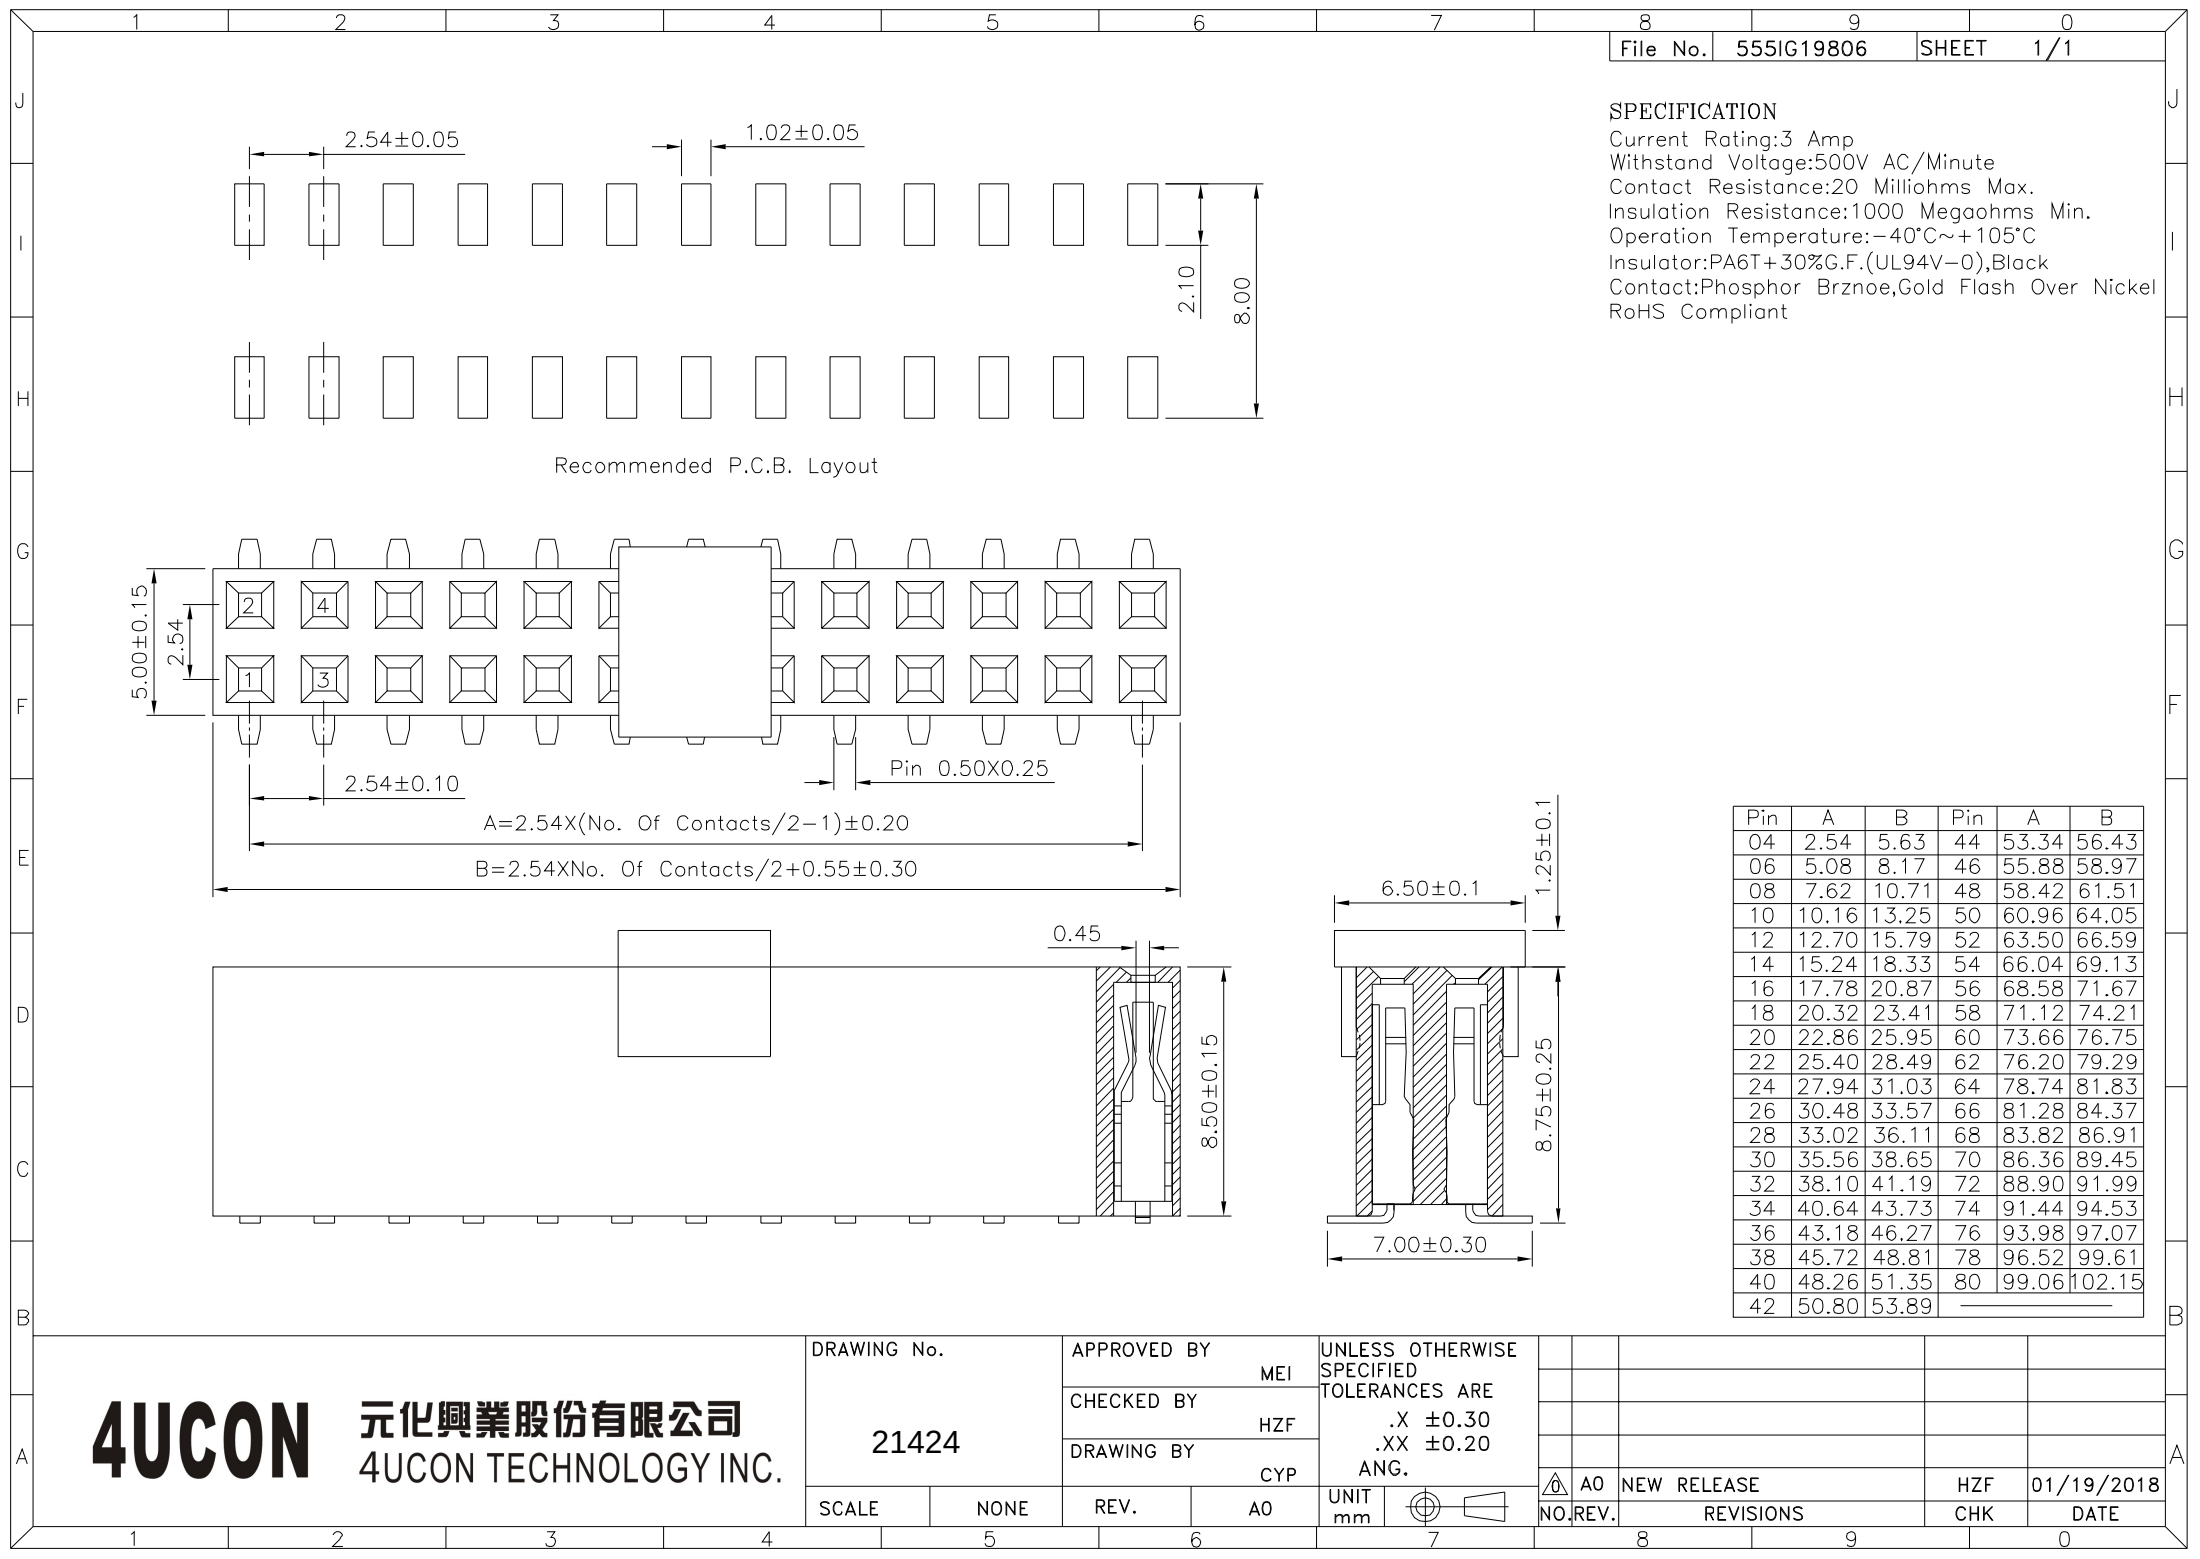

SPECIFICATION
Current Rating:3 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Brznoe,Gold Flash Over Nickel
RoHS Compliant

Pin	A	B	Pin	A	B
04	2.54	5.63	44	53.34	56.43
06	5.08	8.17	46	55.88	58.97
08	7.62	10.71	48	58.42	61.51
10	10.16	13.25	50	60.96	64.05
12	12.70	15.79	52	63.50	66.59
14	15.24	18.33	54	66.04	69.13
16	17.78	20.87	56	68.58	71.67
18	20.32	23.41	58	71.12	74.21
20	22.86	25.95	60	73.66	76.75
22	25.40	28.49	62	76.20	79.29
24	27.94	31.03	64	78.74	81.83
26	30.48	33.57	66	81.28	84.37
28	33.02	36.11	68	83.82	86.91
30	35.56	38.65	70	86.36	89.45
32	38.10	41.19	72	88.90	91.99
34	40.64	43.73	74	91.44	94.53
36	43.18	46.27	76	93.98	97.07
38	45.72	48.81	78	96.52	99.61
40	48.26	51.35	80	99.06	102.15
42	50.80	53.89			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
21424		DRAWING BY	CYP
		SCALE	NONE
REV.		A0	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		UNIT	mm
		ANG.	

NO.	REV.	NEW RELEASE	HZF	01/19/2018
		REVISIONS	CHK	DATE