

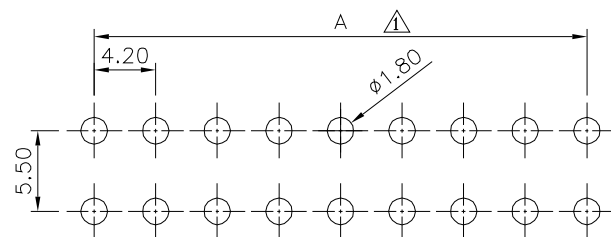
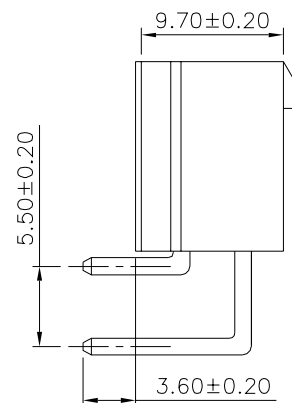


SPECIFICATION

- Current Rating:7A AC/DC
- ⚠ Voltage Rating:600V AC/DC
- Withstanding Voltage:1500V AC/Minute
- Insulation Resistance:1000 Megaohms Min.
- Contact Resistance:10 Milliohms Max.
- Operation Temperature:-25°C~+85°C
- ⚠ Insulator:PA66(UL94V-2),Nature
- Contact:Brass,Tin Plated
- RoHS Compliant

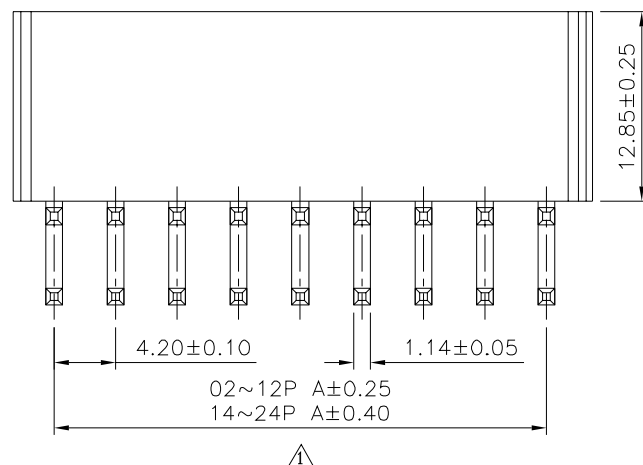

Recommended P.C.B. Layout

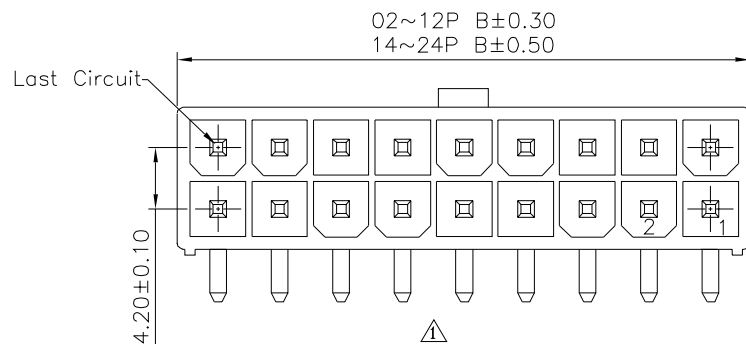

Pin	A	B
02	--	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21469

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.


A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015


UNIT
mm




2	A2	Modify Data	HZF	07/30/2015
1	A1	Modify Data	HZF	06/10/2014
0	A0	NEW RELEASE	HZF	05/14/2011
NO. REV.		REVISIONS	CHK	DATE

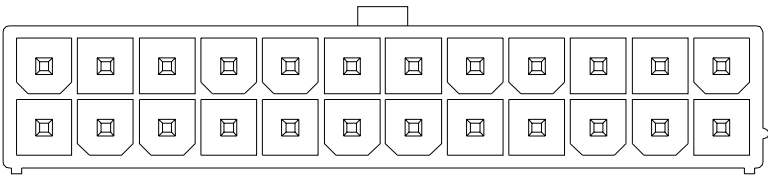


2X12P

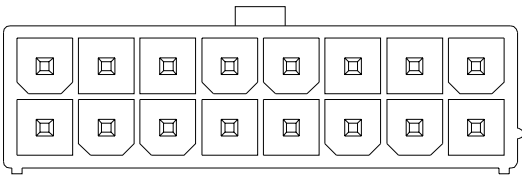


2X08P




2X04P

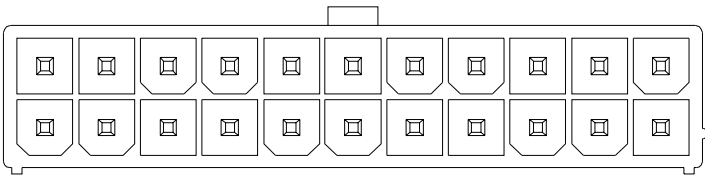


2X11P

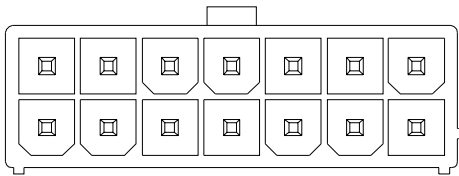


2X07P




2X03P

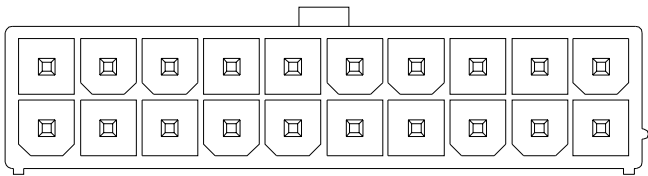


2X10P

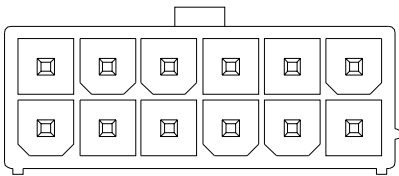


2X06P




2X02P

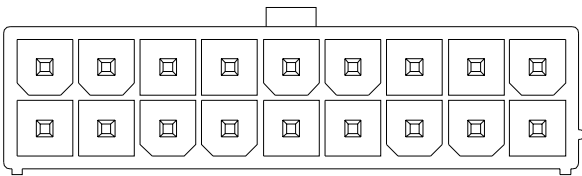

2X09P



2X05P



2X01P

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015						
		MEI								
		CHECKED BY			HZF					
		DRAWING BY								
21469				CYP						
				A2						
SCALE	NONE	REV.	A2	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE