



△△SPECIFICATION


Current Rating:1A
Voltage Rating:50V AC,DC
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Temperature Range:−40°C~+105°C
Contact:Phosphor Bronze,Tin Plated
Fitting Nail:Brass,Tin Plated
Insulator:PA9T(UL94V−0),Ecru
RoHS Compliant

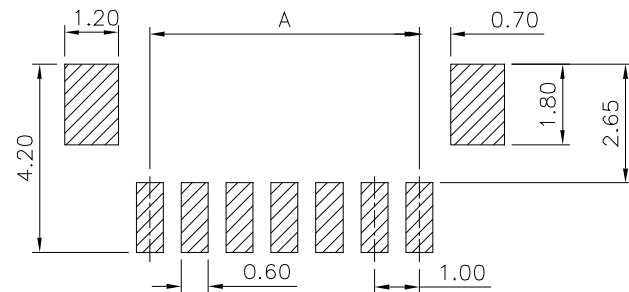


△△Recommended P.C.B. Layout
Tolerance±0.05

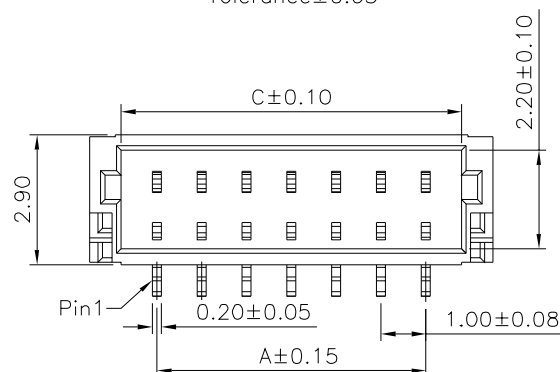


△△

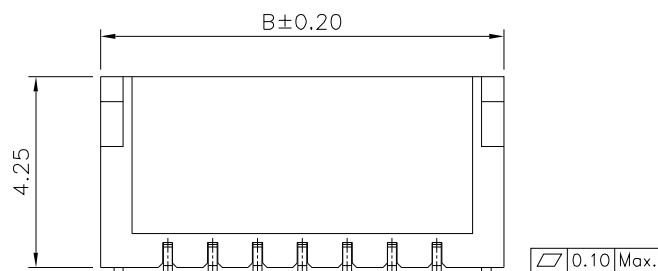

△△

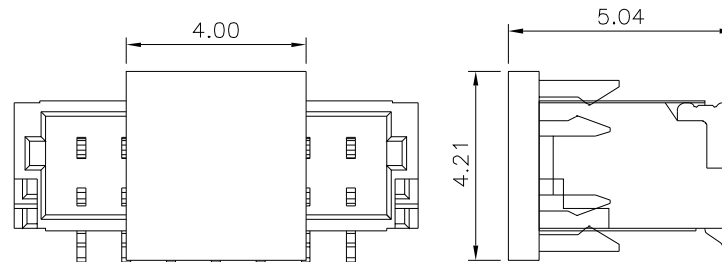

With Cap



△△

Pin	A	B	C
02	1.00	4.00	2.60
03	2.00	5.00	3.60
04	3.00	6.00	4.60
05	4.00	7.00	5.60
06	5.00	8.00	6.60
07	6.00	9.00	7.60
08	7.00	10.00	8.60
09	8.00	11.00	9.60
10	9.00	12.00	10.60
11	10.00	13.00	11.60
12	11.00	14.00	12.60
13	12.00	15.00	13.60
14	13.00	16.00	14.60
15	14.00	17.00	15.60
16	15.00	18.00	16.60
17	16.00	19.00	17.60
18	17.00	20.00	18.60
19	18.00	21.00	19.60
20	19.00	22.00	20.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.△△

21479

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
△.XX ±0.20
.XXX ±0.10
ANG ±2°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	04/08/2021
△2	A2	Modify Data	HZF	06/05/2020
△1	A1	Modify Data	HZF	09/11/2017
△0	A0	NEW RELEASE	HZF	11/04/2014