

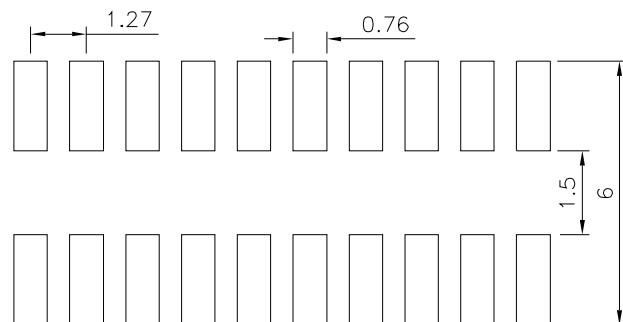
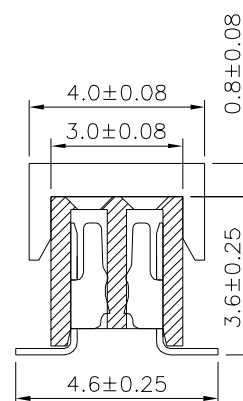


SPECIFICATION

Current Rating:1 Amp
 Withstand Voltage:500V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:−40°C~+105°C
 Insulator:PA6T(UL94V−0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

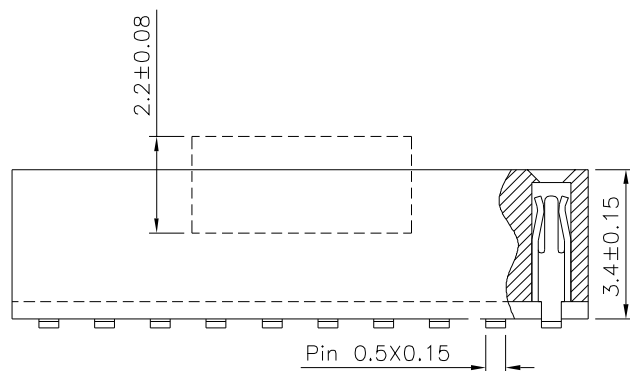

Recommended P.C.B. Layout

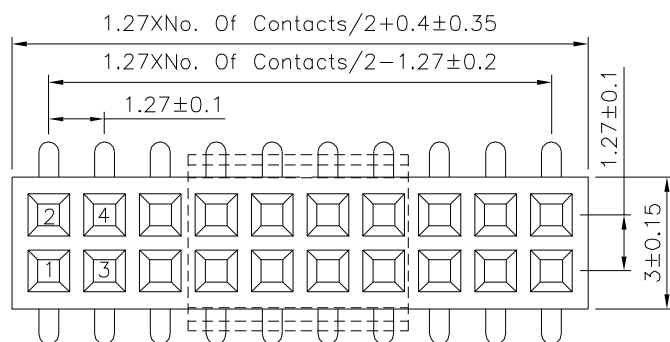

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21498

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 <5 ±0.05
 5~25 ±0.10
 25~80 ±0.15
 >80 ±1.20
 ANG. ±0.03°

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

05/28/2018

SCALE

NONE

REV.

A0