

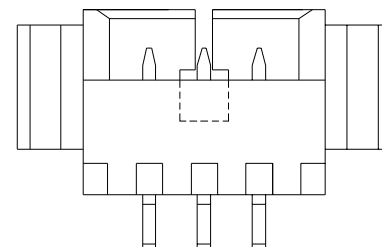


# △ SPECIFICATION


Current Rating:1.0A AC/DC  
Voltage Rating:125V AC/DC  
Contact Resistance:20 Milliohms Max.  
Withstanding Voltage:250V AC/Minute  
Insulation Resistance:100 Megaohms Min.  
△ Temperature Range:-25°C~+85°C  
Insulator:PA46(UL94V-0),Nature  
Pin:Phosphor Bronze,Tin Plated Over Nickel  
Solder Tab:Brass,Tin Plated Over Nickel  
RoHS Compliant

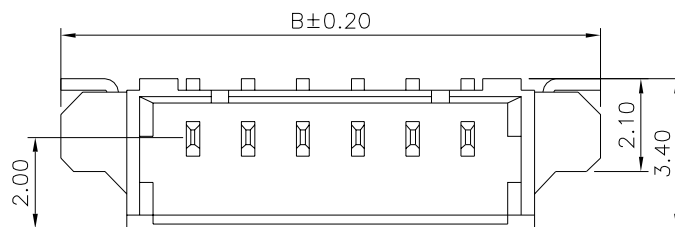


2P,3P





△ Section:A-A

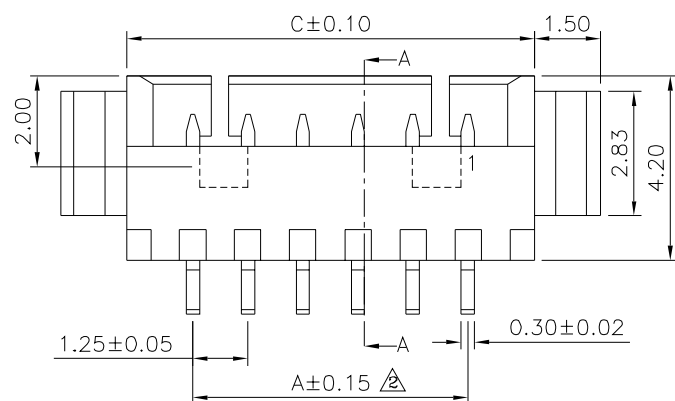

△ 4~15P

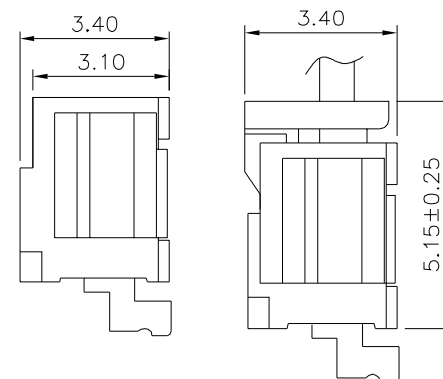

Mating Height Drawing

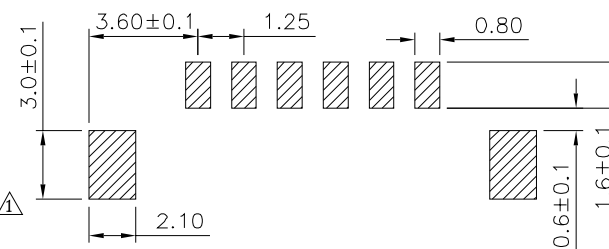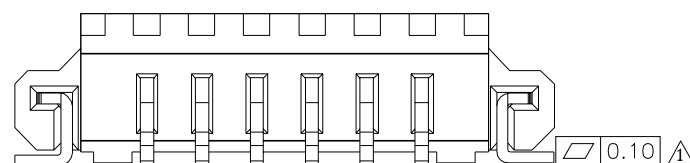

△ Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

| Pin | A     | B     | C     |
|-----|-------|-------|-------|
| 02  | 1.25  | 7.25  | 4.25  |
| 03  | 2.50  | 8.50  | 5.50  |
| 04  | 3.75  | 9.75  | 6.75  |
| 05  | 5.00  | 11.00 | 8.00  |
| 06  | 6.25  | 12.25 | 9.25  |
| 07  | 7.50  | 13.50 | 10.50 |
| 08  | 8.75  | 14.75 | 11.75 |
| 09  | 10.00 | 16.00 | 13.00 |
| 10  | 11.25 | 17.25 | 14.25 |
| 11  | 12.50 | 18.50 | 15.50 |
| 12  | 13.75 | 19.75 | 16.75 |
| 13  | 15.00 | 21.00 | 18.00 |
| 14  | 16.25 | 22.25 | 19.25 |
| 15  | 17.50 | 23.50 | 20.50 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. △

21567

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.30  
XX ±0.25  
XXX ±0.20  
ANG. ±1°

UNIT mm

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △3  | A3   | Modify Data | HZF | 07/17/2023 |
| △2  | A2   | Modify Data | HZF | 12/04/2019 |
| △1  | A1   | Modify Data | HZF | 04/17/2019 |
| △0  | A0   | NEW RELEASE | HZF | 12/30/2015 |