

SPECIFICATION

Range:

Non-Switching:100mA 50V DC

Switching:25mA 24V DC

Contact Resistance:100 Milliohms Max. At Initial

Insulation Resistance:100 Megaohms Min. At 500V DC

Withstand Voltage:300V AC/Minute

Operation Temperature:-40°C~+85°C

① Cover:HTN FR52G30NH(UL94V-0),Black

② Actuators:LCP(UL94V-0),White


③ Contact:YCuT,Gold Plated Over Nickel

④ Terminal:Brass,Gold Plated Over Nickel




⑤ Base:HTN FR52G30NH(UL94V-0),Black

⑥ Tape:Katpon

RoHS Compliant

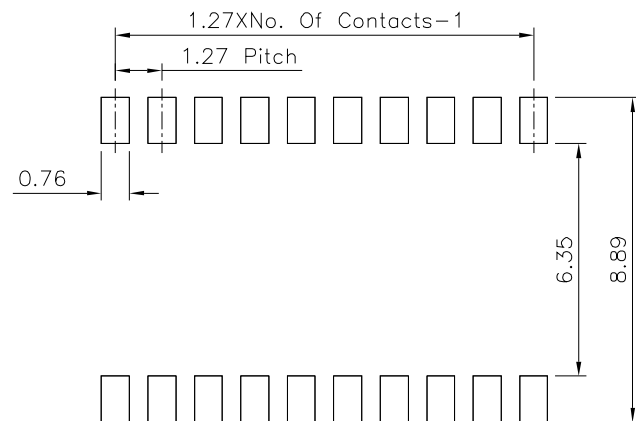

Recommended P.C.B. Layout

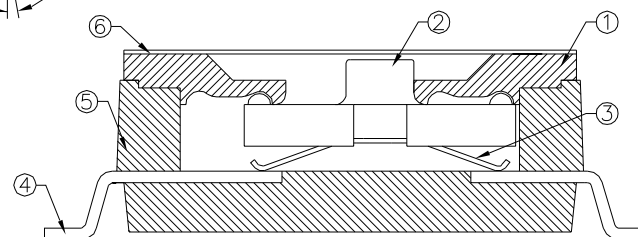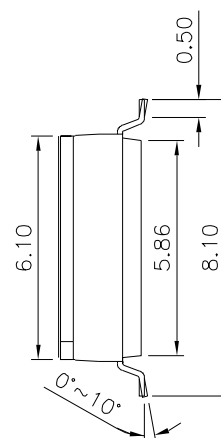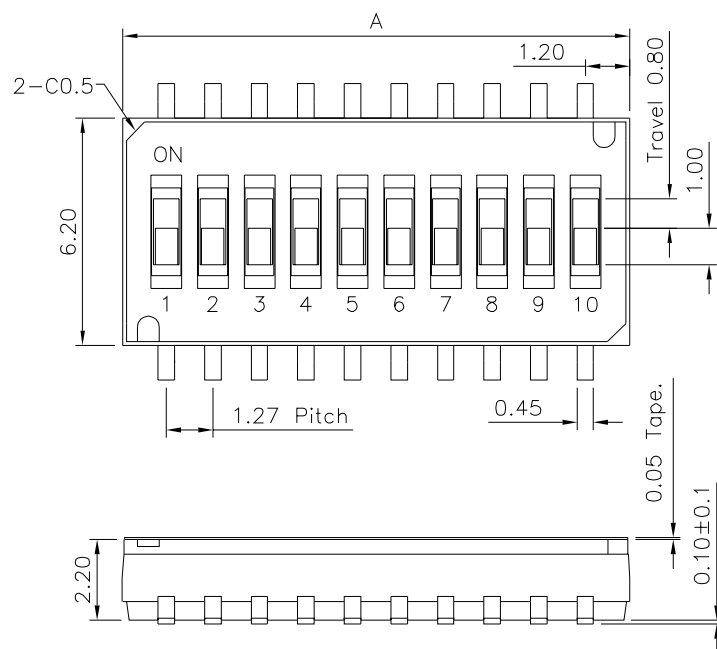

Pin	A
02	3.67
04	6.21
06	8.75
08	11.29
10	13.83

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21581

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.XX ±0.2


SCALE

NONE

REV.

A0

UNIT
mm



△ A0

NEW RELEASE

NO. REV.

REVISIONS

HZF

CHK

09/01/2017

DATE