
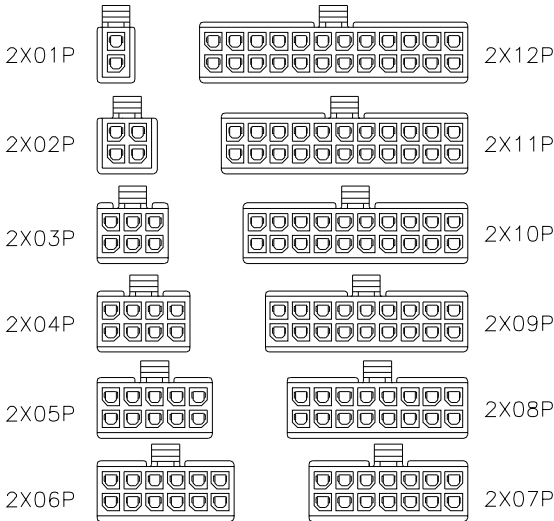
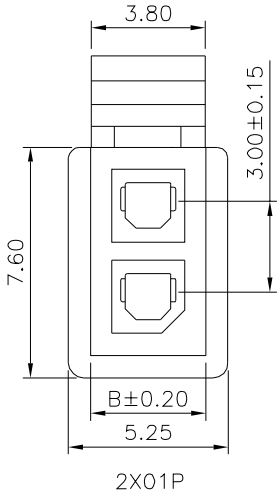
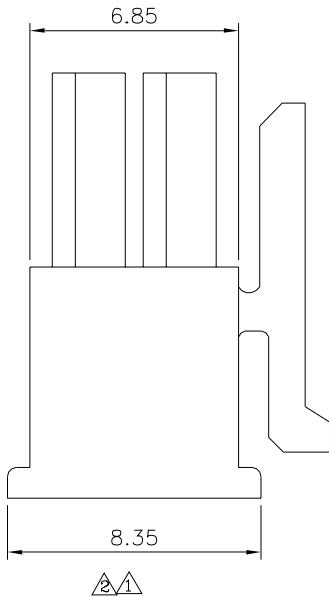
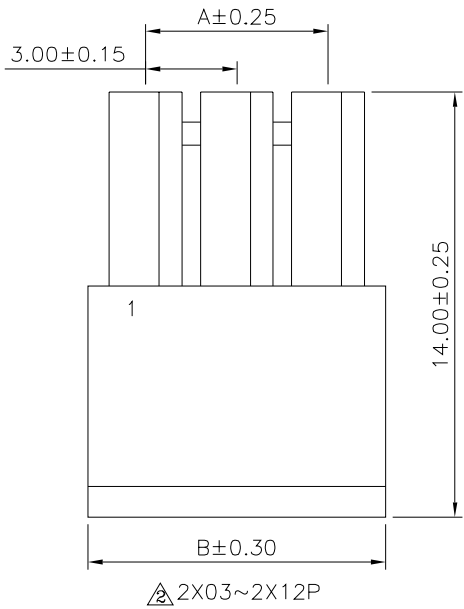


△ SPECIFICATION

- 1. Material & Finish
Insulator: PA66 (UL94V-2), Black
- 2. Electrical Characteristics
Current Rating: 5A AC/DC
Voltage Rating: 250V AC/DC
Withstanding Voltage: 1500V AC/Minute
Insulation Resistance: 1000 Megaohms Min.
- 3. Environmental Characteristics
Temperature Range: -25°C ~ +85°C
- 4. RoHS Compliant

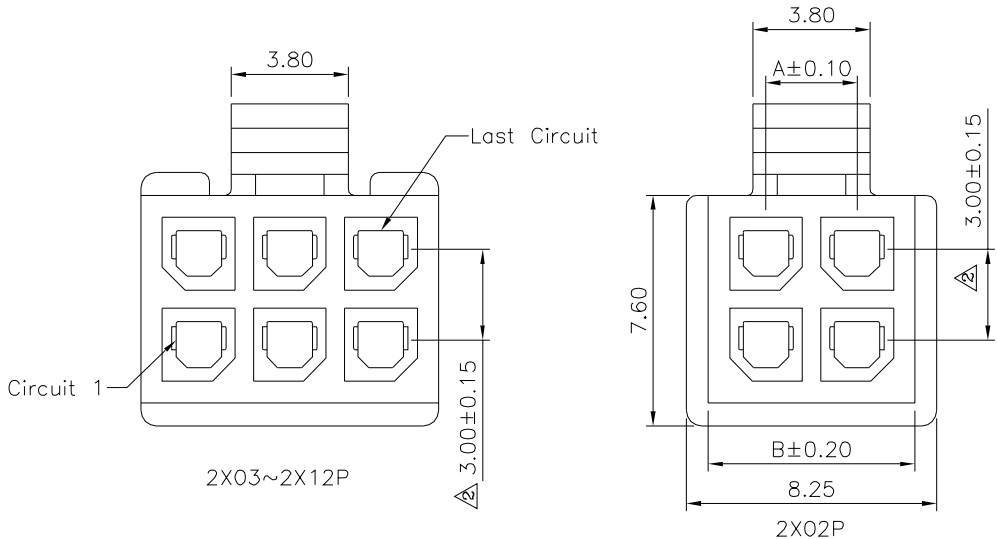

Pin	A	B
02	3.85	3.85
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21605

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.05
ANG. ±1°

UNIT
mm



△ B2

Modify Data

HZF

09/27/2023

△ B1

Modify Data

HZF

09/24/2019

△ B0

NEW RELEASE

HZF

02/17/2016

NO. REV.

REVISIONS

CHK

DATE