
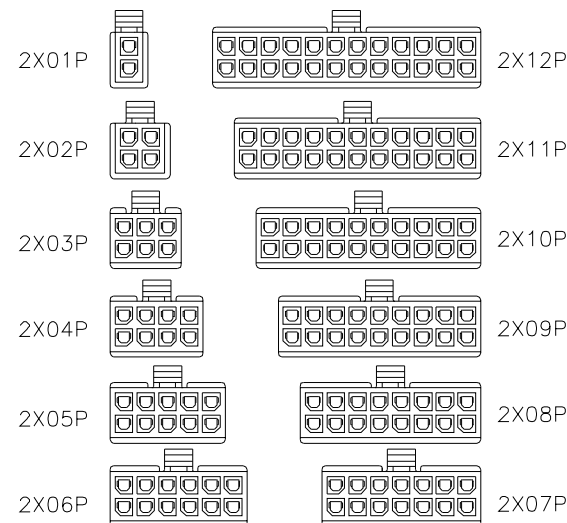
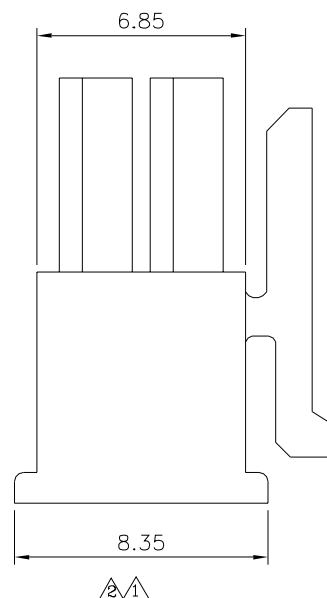
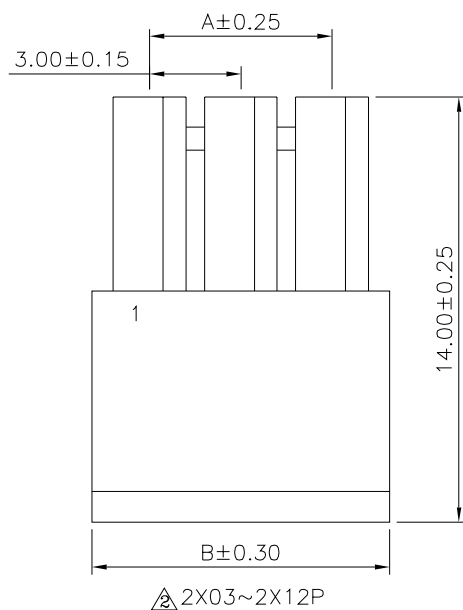
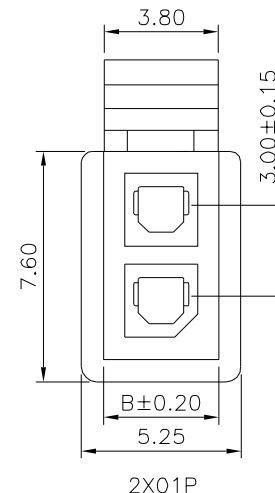
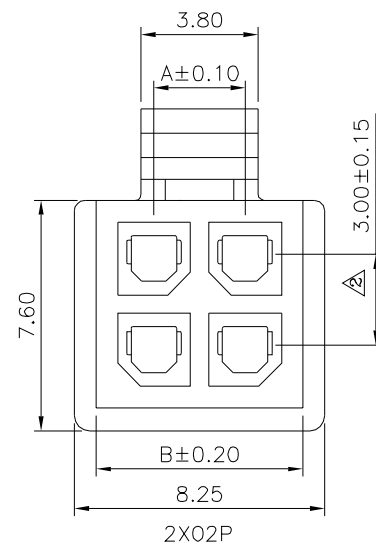


# △ SPECIFICATION

1. Material & Finish  
Insulator: PA66 (UL94V-2), Black
2. Electrical Characteristics  
Current Rating: 5A AC/DC  
Voltage Rating: 250V AC/DC  
Withstanding Voltage: 1500V AC/Minute  
Insulation Resistance: 1000 Megaohms Min.
3. Environmental Characteristics  
Temperature Range: -25°C ~ +85°C
4. RoHS Compliant

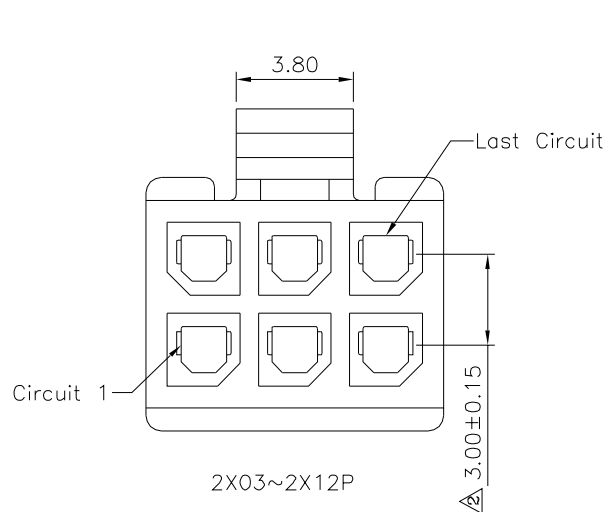

| Pin | A     | B     |
|-----|-------|-------|
| 02  | 3.85  |       |
| 04  | 3.00  | 6.85  |
| 06  | 6.00  | 9.85  |
| 08  | 9.00  | 12.85 |
| 10  | 12.00 | 15.85 |
| 12  | 15.00 | 18.85 |
| 14  | 18.00 | 21.85 |
| 16  | 21.00 | 24.85 |
| 18  | 24.00 | 27.85 |
| 20  | 27.00 | 30.85 |
| 22  | 30.00 | 33.85 |
| 24  | 33.00 | 36.85 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

21607

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.30  
.X ±0.25  
.XX ±0.20  
.XXX ±0.05  
ANG. ±1°

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △2  | B2   | Modify Data | HZF | 09/27/2023 |
| △1  | B1   | Modify Data | HZF | 09/24/2019 |
| △0  | B0   | NEW RELEASE | HZF | 02/17/2016 |