
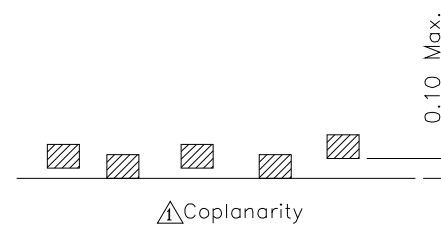
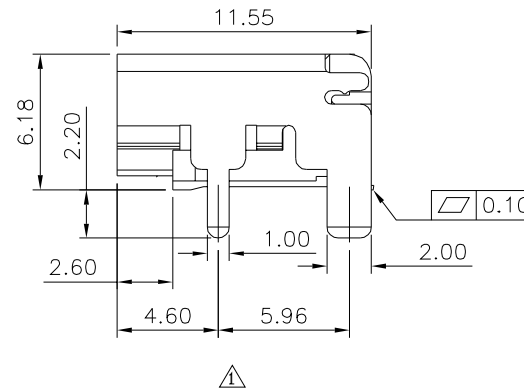
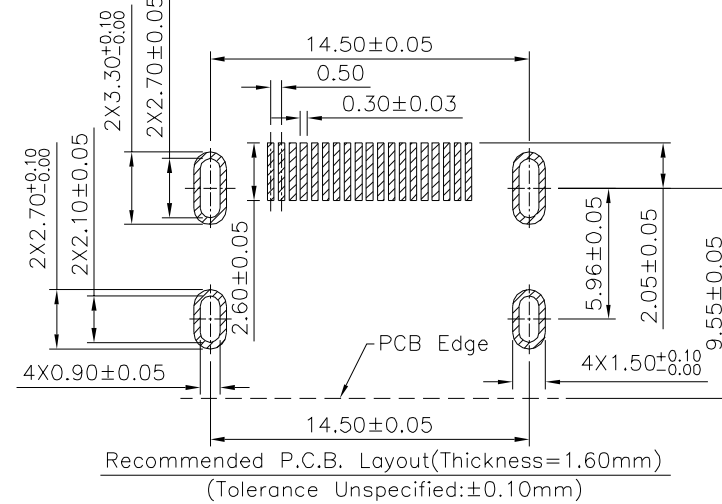
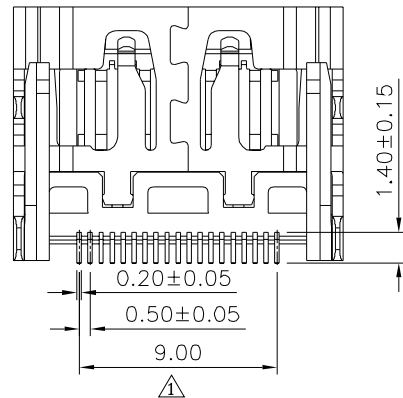
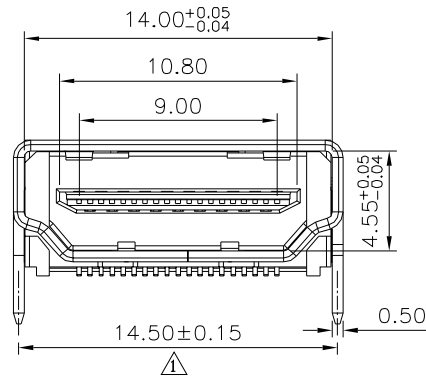


△ SPECIFICATION

Current Rating:0.5A
Voltage Rating:40V
Insulation Resistance:100 Megaohms Min.
Contact Resistance:10 Milliohms Max.
Operation Temperature:-20°C~+85°C
Insert Force:44.1N Max.
Extract Force:9.8~39.2N
Insulator:LCP(UL94V-0),Black
Contact:Brass
Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Shell:Brass,Nickel Plated
RoHS Compliant

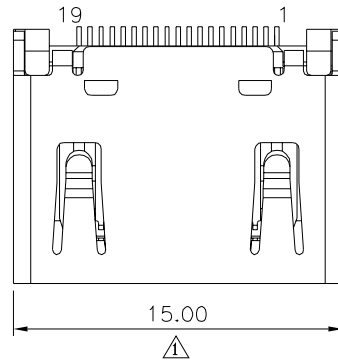

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21672

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.25	X* $\pm 3^{\circ}$
.XX ± 0.15	.X* $\pm 2^{\circ}$
.XXX ± 0.10	.XX* $\pm 1^{\circ}$

	UNIT mm
--	------------



1

	B1
--	----

1	Modify Data
---	-------------

HZF

11/17/2023	
------------	--

[illegible]

	BO
--	----

NEW RELEASE

HZF

07/24/2019

NO.	REV.
-----	------

REVISIONS

CHK

DATE _____