

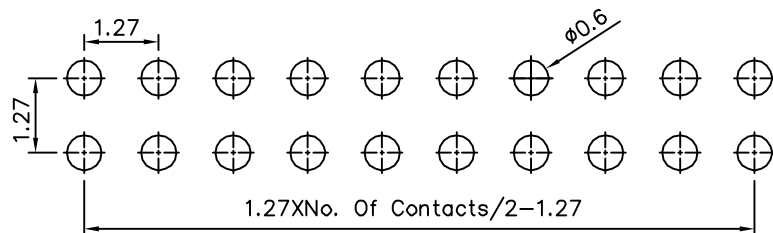
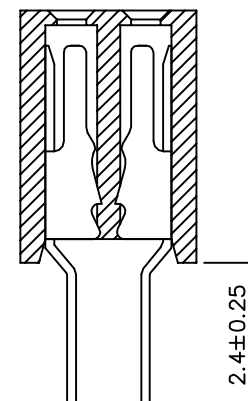


SPECIFICATION

Current Rating:1 Amps
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

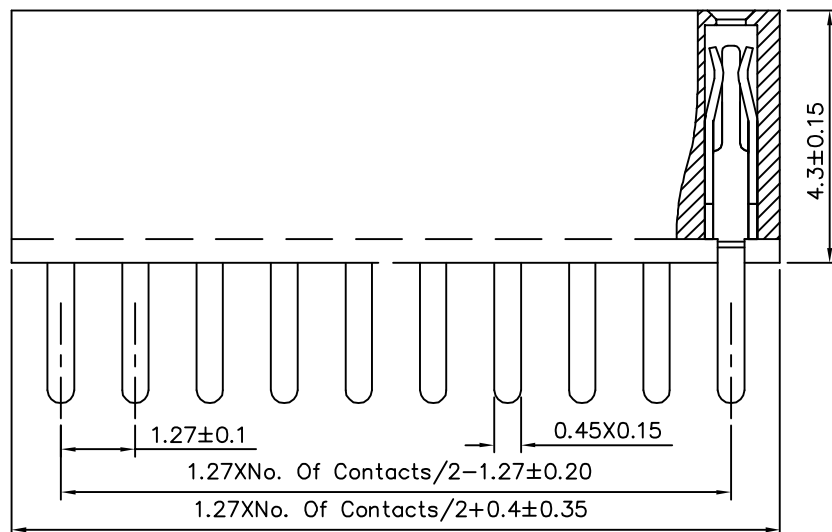

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

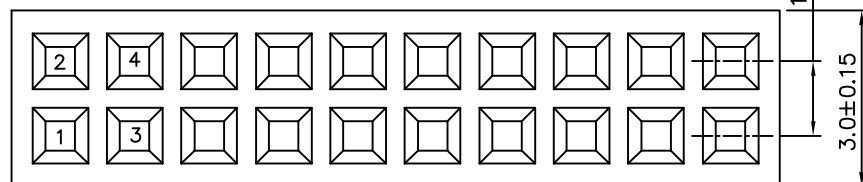

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21702

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE
X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT
mm



NO.

REV.

A0 NEW RELEASE

REVISIONS

HZF

CHK

09/28/2015

DATE