

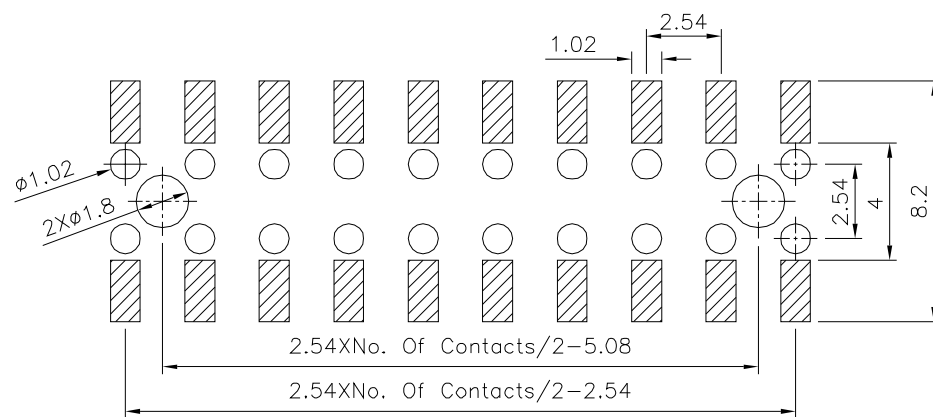
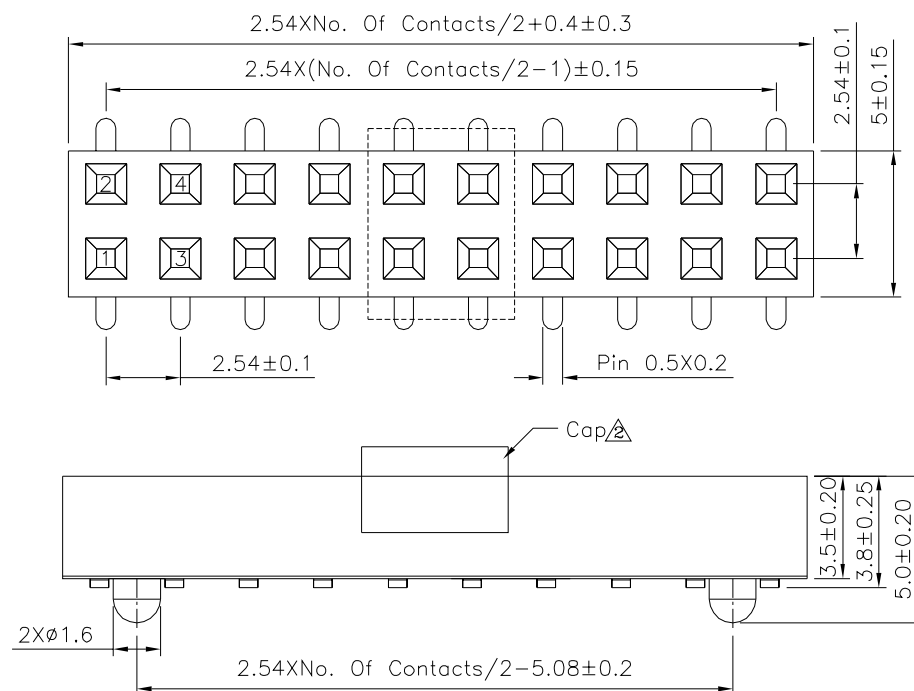


SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-O),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant



Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

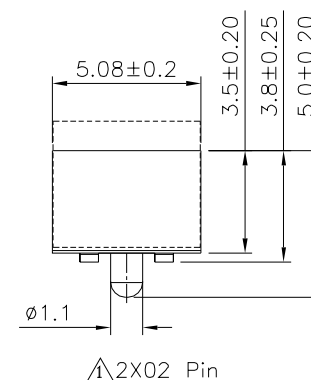

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21765

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV. A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X. ±2"
.X ±0.20 .X ±1.5"
.XX ±0.15 .XX ±1"
.XXX ±0.10 .XXX ±0.5"

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	04/14/2021
1	A1	Modify Data	HZF	08/26/2015
0	A0	NEW RELEASE	HZF	07/02/2014