

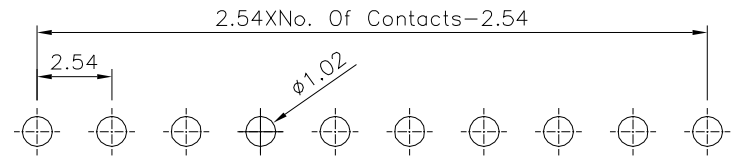
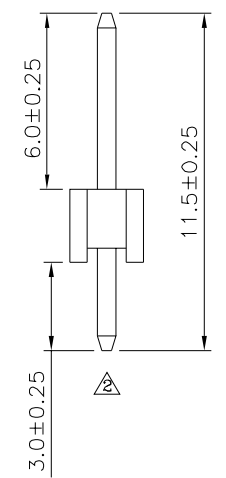


△ SPECIFICATION
 Current Rating: 3 Amp
 Withstanding Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PBT (UL94V-0), Black
 RoHS Compliant

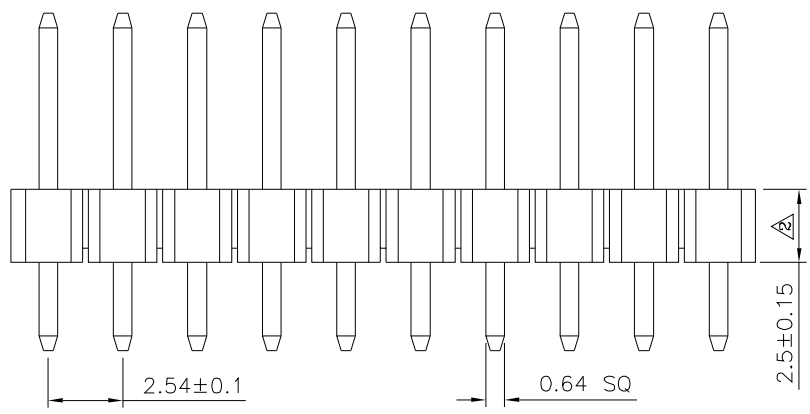

△ Recommended P.C.B. Layout (Top View)
 (PCB Board Tolerance ±0.05)

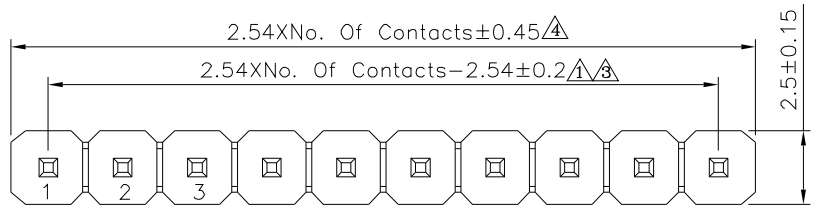

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
21796		EMILY	
		CHECKED BY	
		HZF	
DRAWING BY		CYP	
SCALE	NONE	REV.	A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △			
X.	±0.25	X.*	±2°
.X	±0.20	.X*	±1.5°
.XX	±0.15	.XX*	±1°
.XXX	±0.10	.XXX*	±0.5°
UNIT	mm		
NO.	REV.	REVISIONS	CHK DATE
△A4		Modify Data	HZF 01/04/2017
△A3		Modify Data	HZF 02/09/2015
△A2		Modify Data	HZF 04/14/2014
△A1		Modify Data	HZF 02/22/2011
△A0		NEW RELEASE	HZF 12/09/2009