

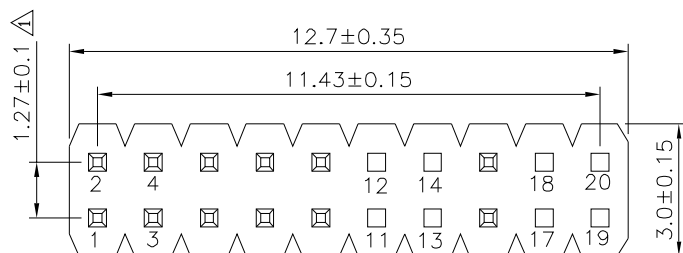


Recommended P.C.B. Layout

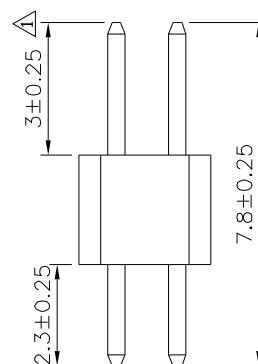

Remove Pin#11~14,17~20Pin

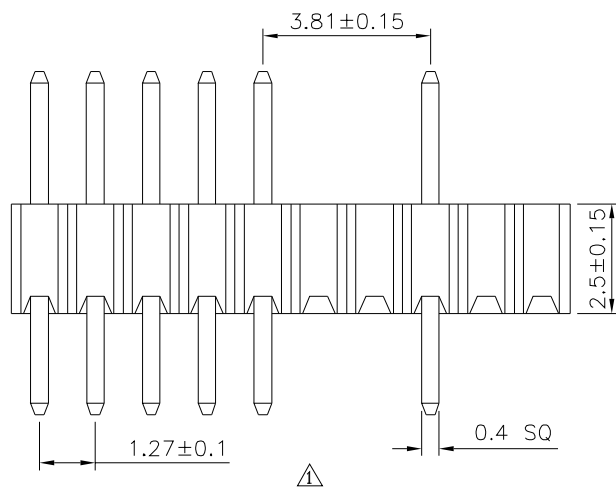

△ SPECIFICATION

Current Rating:1.0 Amp
 Withstand Voltage:500V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21864

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X	±0.25	X.	±2°
.X	±0.20	.X	±1.5°
.XX	±0.15	.XX	±1°
.XXX	±0.10	.XXX	±0.5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	07/31/2023
△	A0	NEW RELEASE	HZF	03/11/2020