


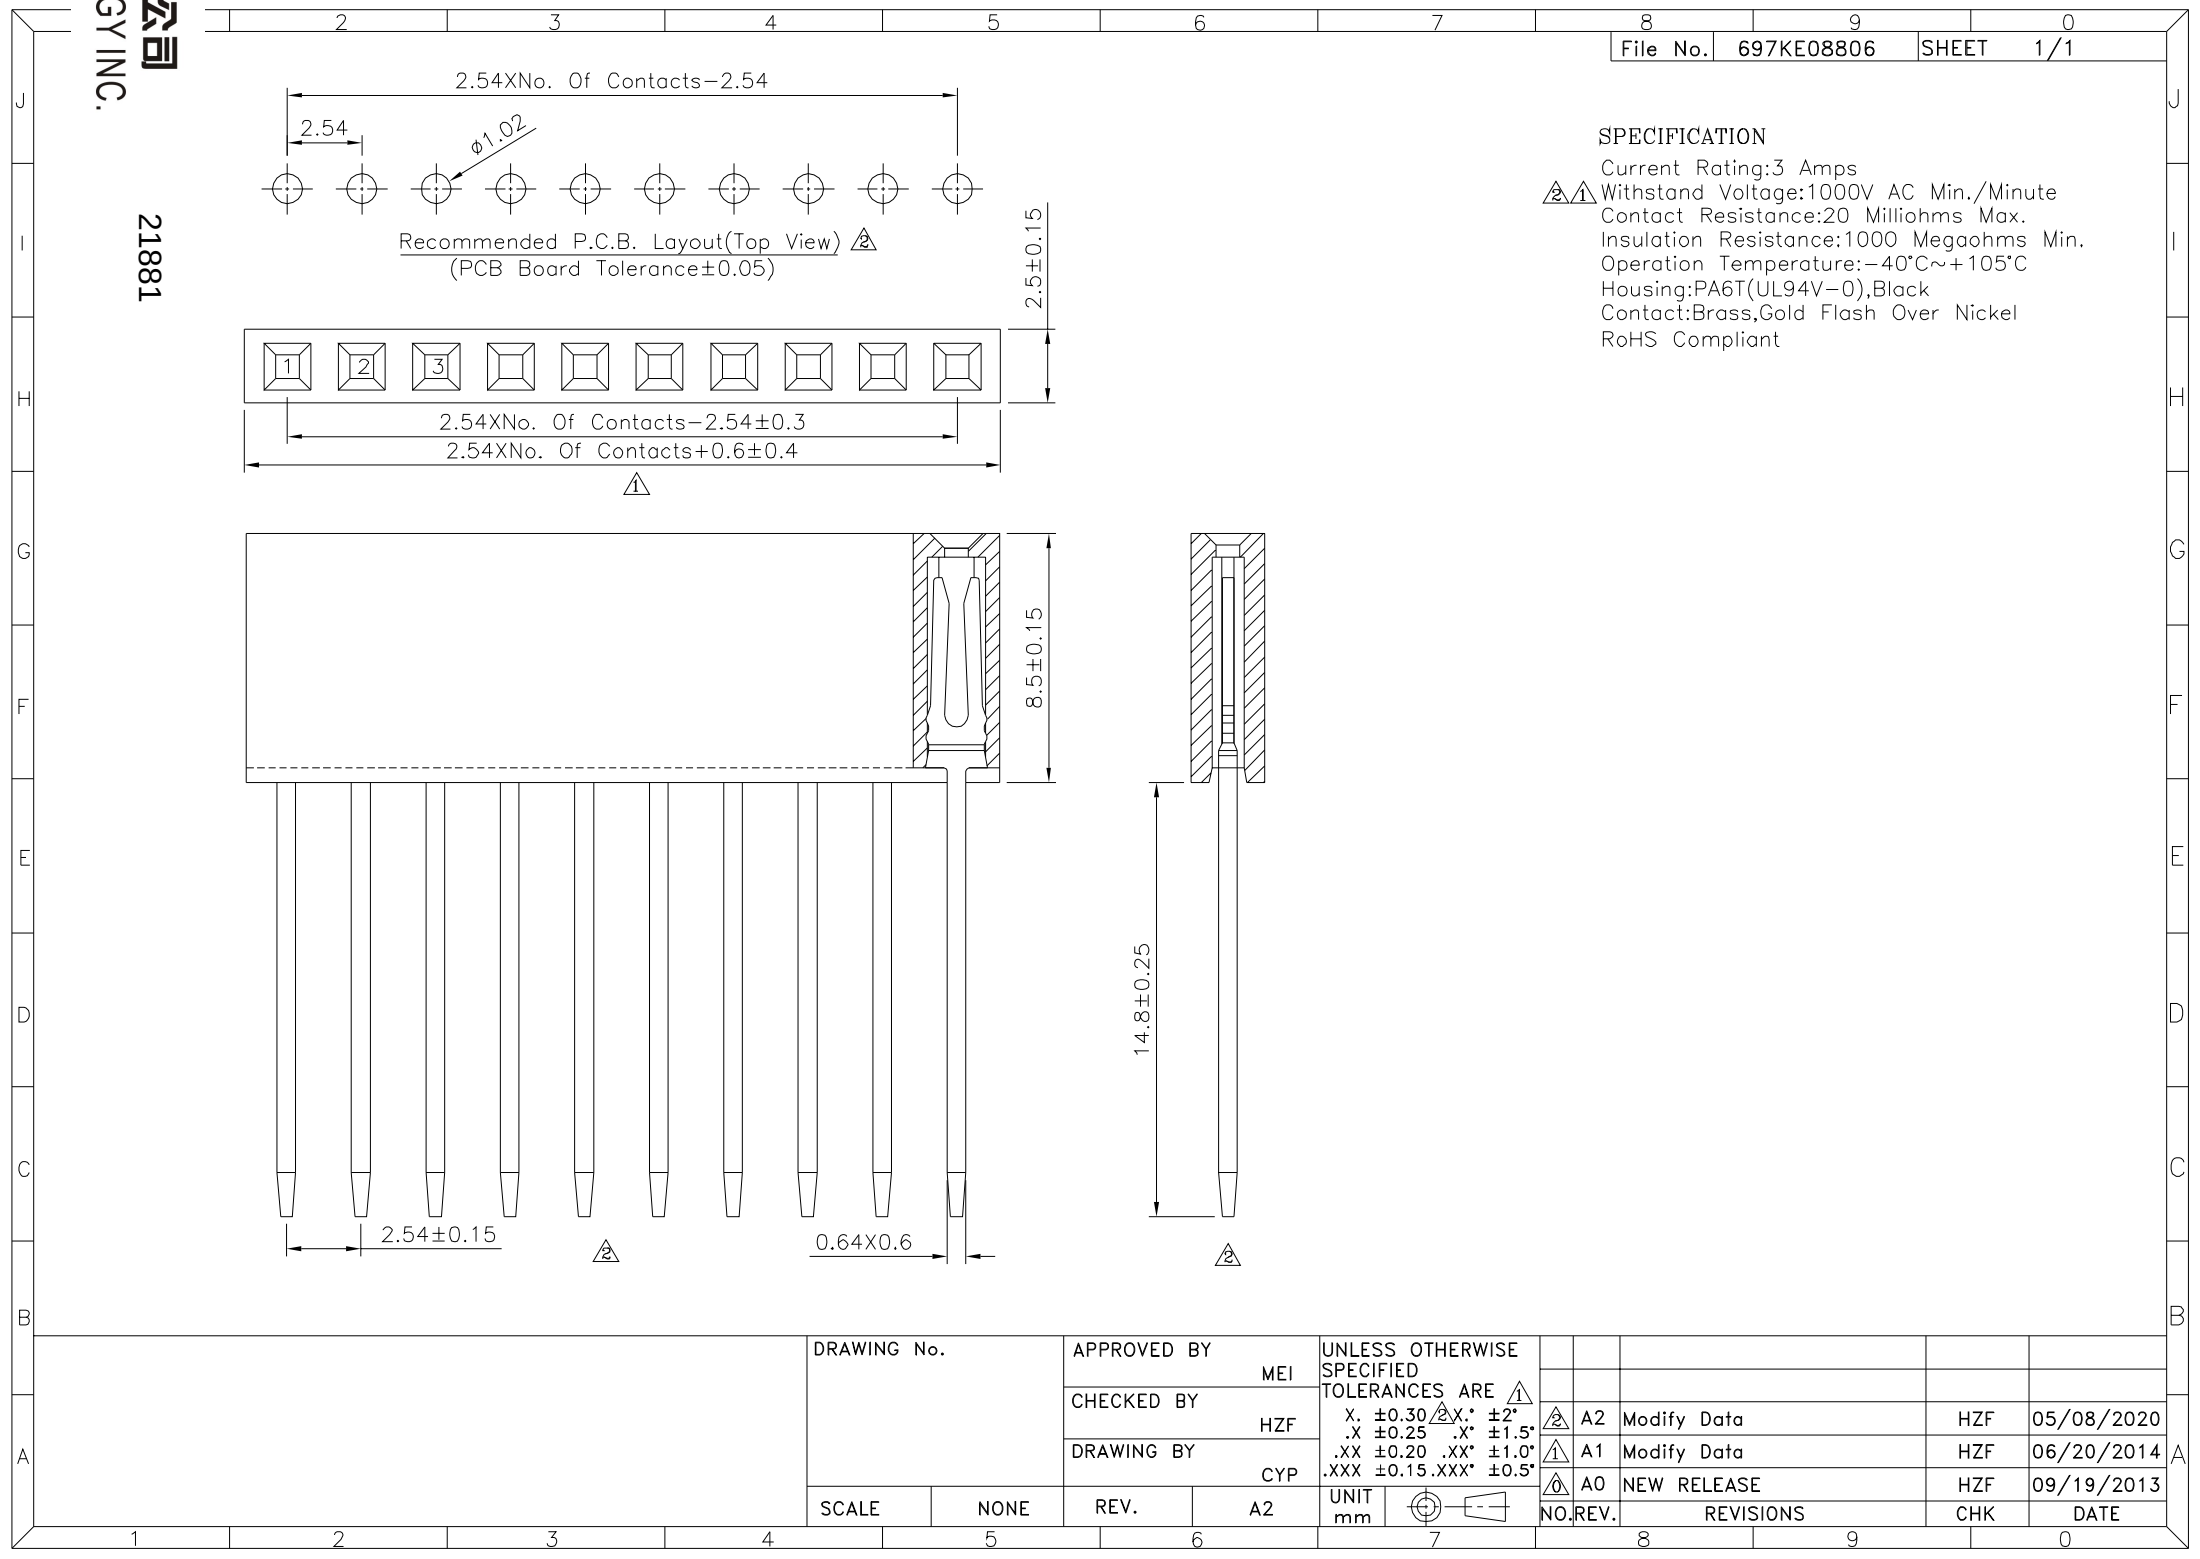

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\triangle$ X. ± 0.30 $\triangle$ X.* $\pm 2^\circ$.X ± 0.25 .X* $\pm 1.5^\circ$.XX ± 0.20 .XX* $\pm 1.0^\circ$.XXX ± 0.15 .XXX* $\pm 0.5^\circ$							
		MEI									
		CHECKED BY									
		HZF									
SCALE		DRAWING BY		UNIT			NO.	REV.	REVISIONS	CHK	DATE
		NONE									
		REV.		A2							