File No.	697KC09806	SHEET	1/1

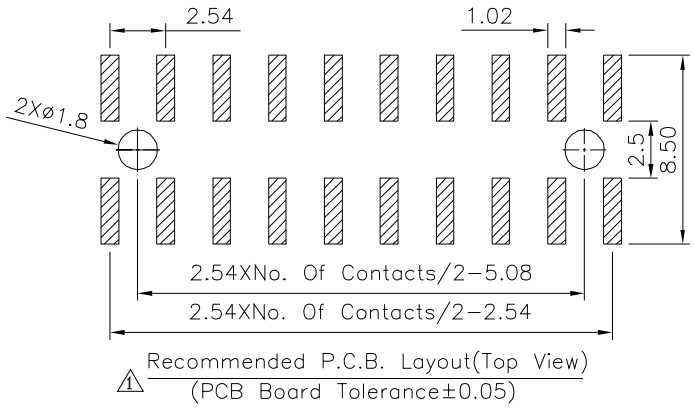

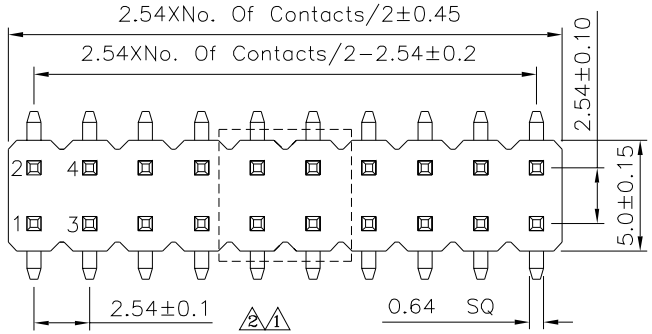

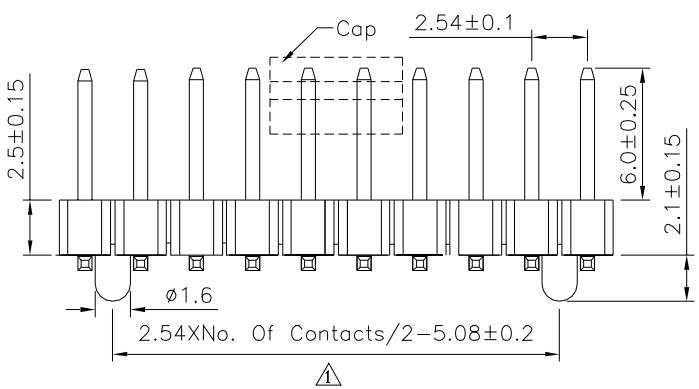

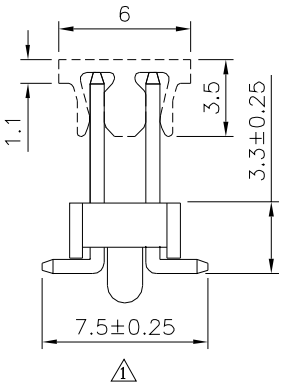

SPECIFICATION

Current Rating:3A
1 Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
21943	MEI	X. ±0.25 X.° ±2°
	CHECKED BY HZF	.X ±0.20 .X° ±1.5°
	DRAWING BY CYP	.XX ±0.15 .XX° ±1°
SCALE NONE	REV. A2	.XXX ±0.10 .XXX° ±0.5°
		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	03/09/2020
1	A1	Modify Data	HZF	06/29/2018
0	A0	NEW RELEASE	HZF	08/25/2013