


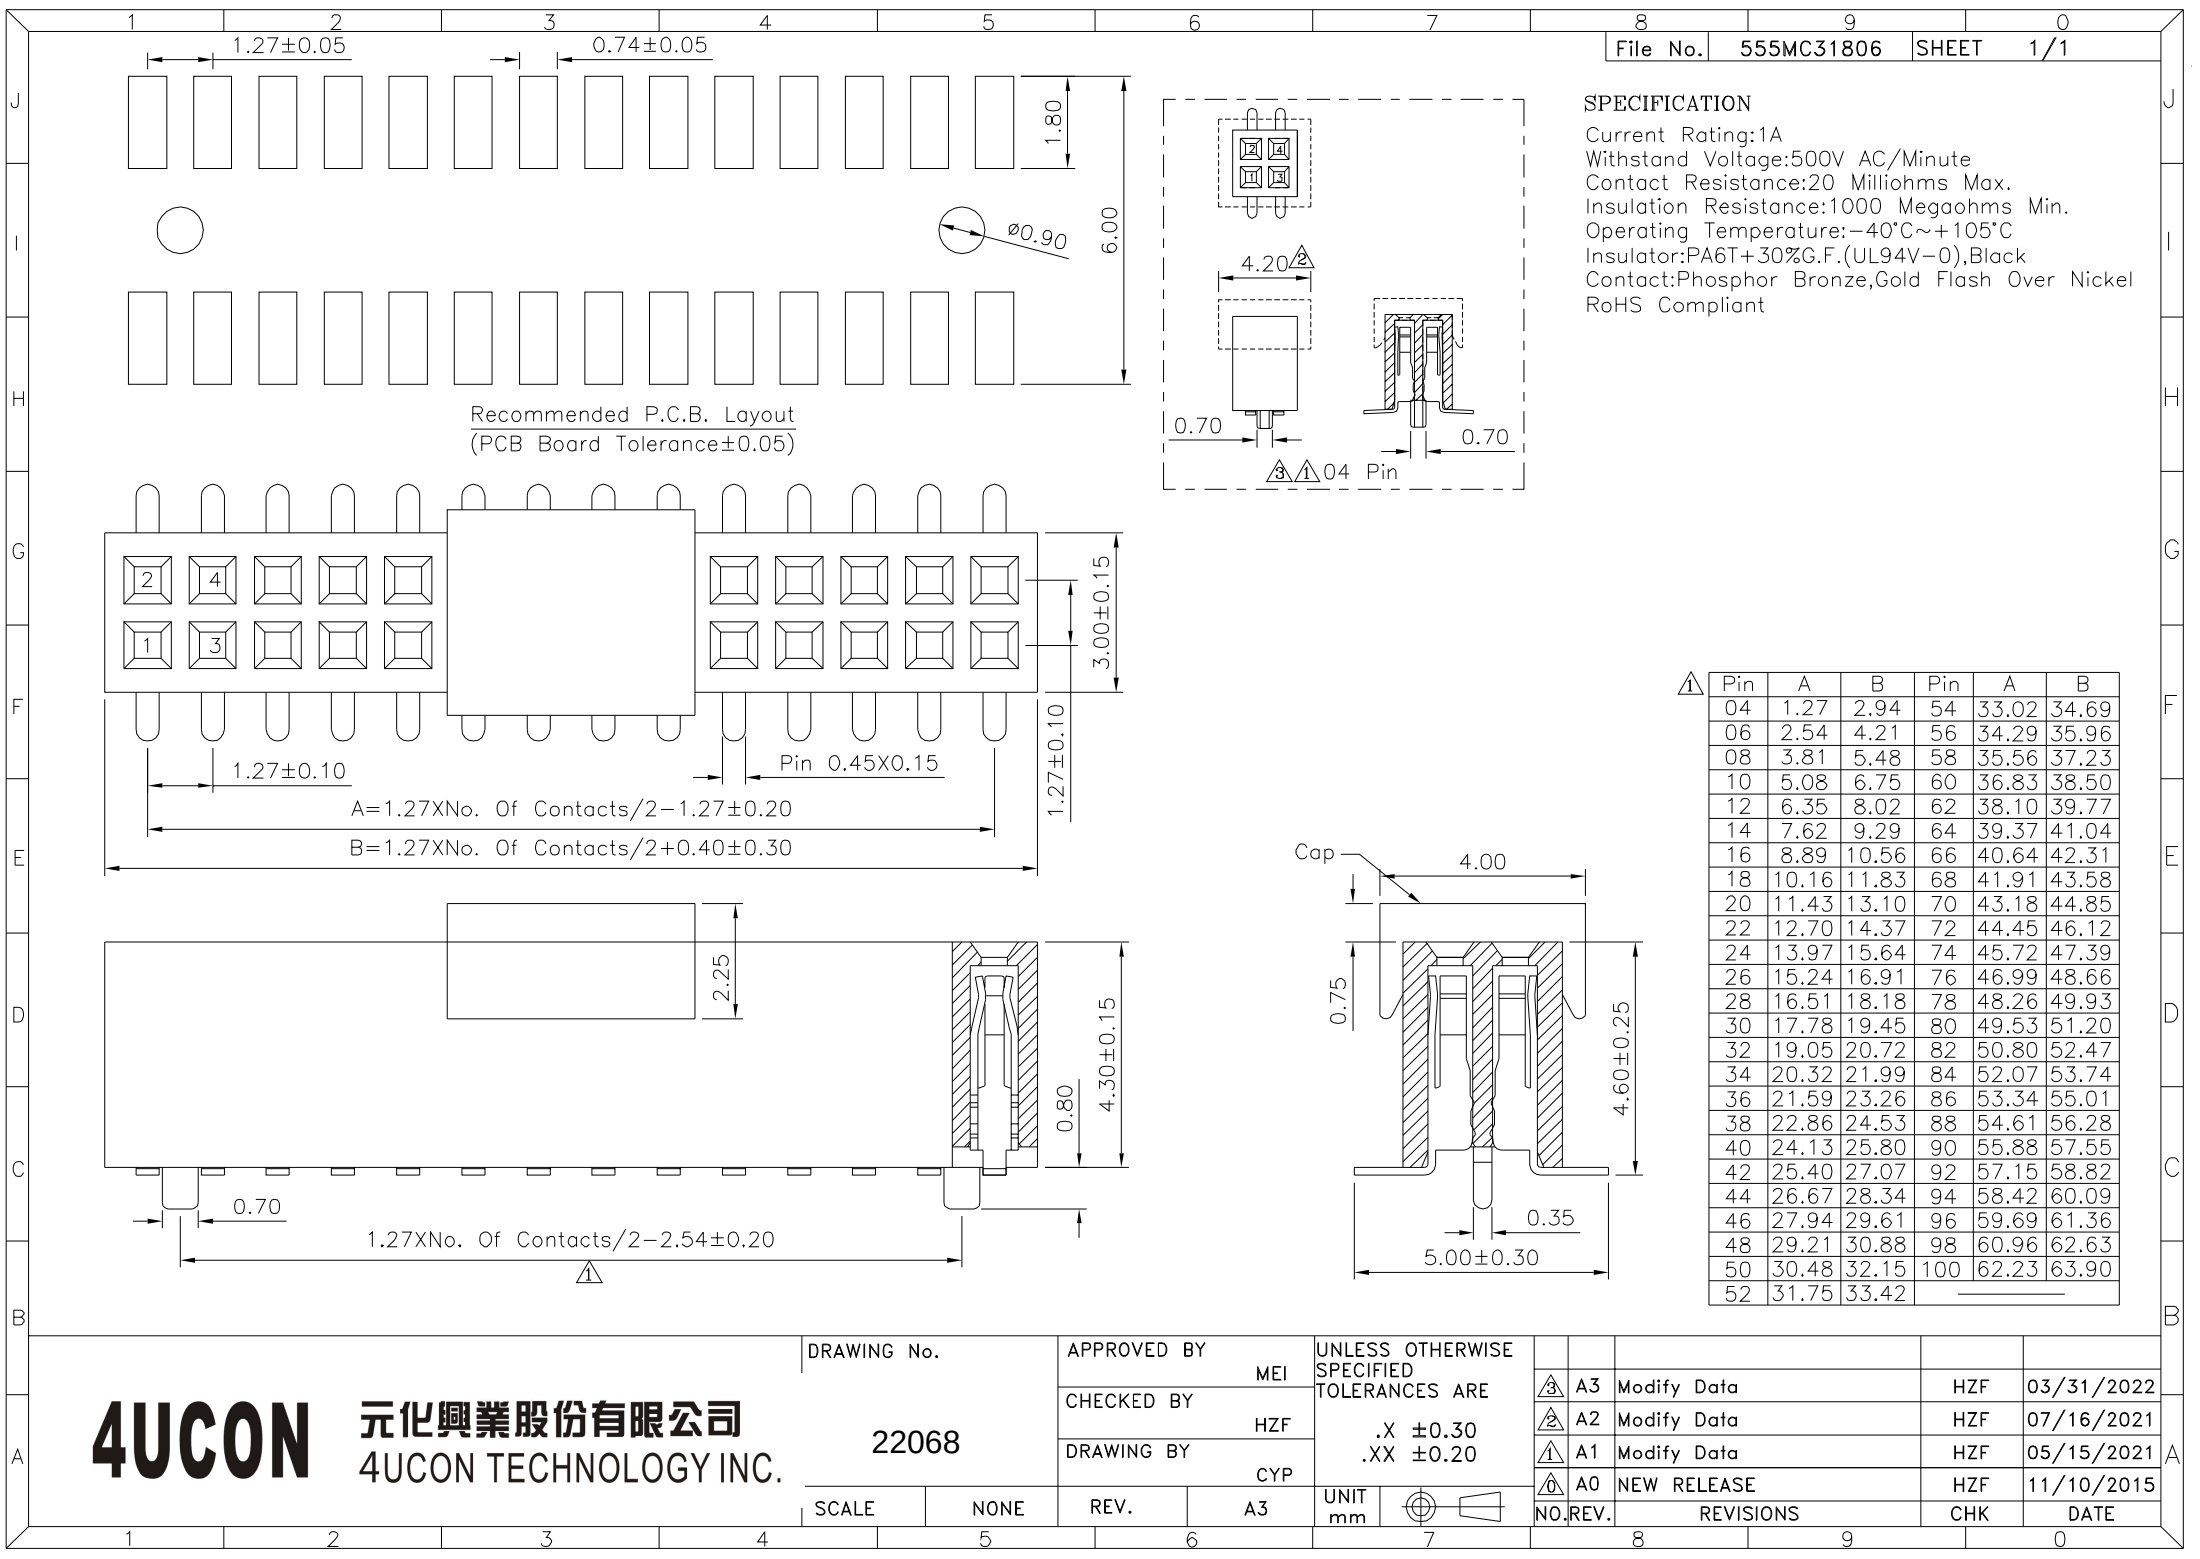

**SPECIFICATION**  
Current Rating:1A  
Withstand Voltage:500V AC/Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature:-40°C~+105°C  
Insulator:PA6T+30%G.F.(UL94V-0),Black  
Contact:Phosphor Bronze,Gold Flash Over Nickel  
RoHS Compliant

| △ | Pin | A     | B     | Pin | A     | B     |
|---|-----|-------|-------|-----|-------|-------|
|   | 04  | 1.27  | 2.94  | 54  | 33.02 | 34.69 |
|   | 06  | 2.54  | 4.21  | 56  | 34.29 | 35.96 |
|   | 08  | 3.81  | 5.48  | 58  | 35.56 | 37.23 |
|   | 10  | 5.08  | 6.75  | 60  | 36.83 | 38.50 |
|   | 12  | 6.35  | 8.02  | 62  | 38.10 | 39.77 |
|   | 14  | 7.62  | 9.29  | 64  | 39.37 | 41.04 |
|   | 16  | 8.89  | 10.56 | 66  | 40.64 | 42.31 |
|   | 18  | 10.16 | 11.83 | 68  | 41.91 | 43.58 |
|   | 20  | 11.43 | 13.10 | 70  | 43.18 | 44.85 |
|   | 22  | 12.70 | 14.37 | 72  | 44.45 | 46.12 |
|   | 24  | 13.97 | 15.64 | 74  | 45.72 | 47.39 |
|   | 26  | 15.24 | 16.91 | 76  | 46.99 | 48.66 |
|   | 28  | 16.51 | 18.18 | 78  | 48.26 | 49.93 |
|   | 30  | 17.78 | 19.45 | 80  | 49.53 | 51.20 |
|   | 32  | 19.05 | 20.72 | 82  | 50.80 | 52.47 |
|   | 34  | 20.32 | 21.99 | 84  | 52.07 | 53.74 |
|   | 36  | 21.59 | 23.26 | 86  | 53.34 | 55.01 |
|   | 38  | 22.86 | 24.53 | 88  | 54.61 | 56.28 |
|   | 40  | 24.13 | 25.80 | 90  | 55.88 | 57.55 |
|   | 42  | 25.40 | 27.07 | 92  | 57.15 | 58.82 |
|   | 44  | 26.67 | 28.34 | 94  | 58.42 | 60.09 |
|   | 46  | 27.94 | 29.61 | 96  | 59.69 | 61.36 |
|   | 48  | 29.21 | 30.88 | 98  | 60.96 | 62.63 |
|   | 50  | 30.48 | 32.15 | 100 | 62.23 | 63.90 |
|   | 52  | 31.75 | 33.42 |     |       |       |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.  
  
22068

APPROVED BY  
MEI  
CHECKED BY  
HZF  
DRAWING BY  
CYP

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.30  
.XX ±0.20

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △   | A3   | Modify Data | HZF | 03/31/2022 |
| △   | A2   | Modify Data | HZF | 07/16/2021 |
| △   | A1   | Modify Data | HZF | 05/15/2021 |
| △   | A0   | NEW RELEASE | HZF | 11/10/2015 |

SCALE NONE REV. A3 UNIT mm