

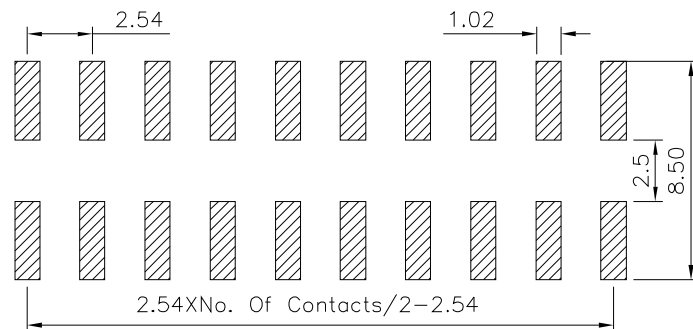
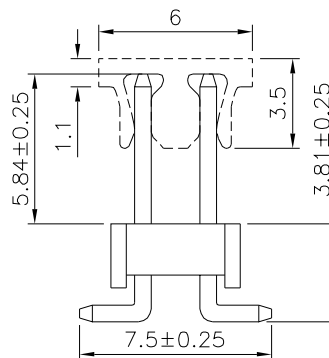


SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

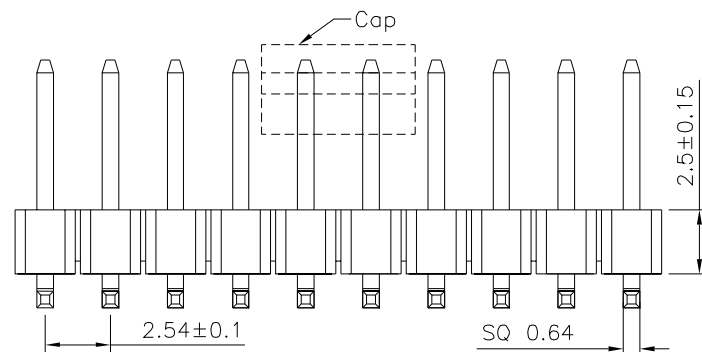

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

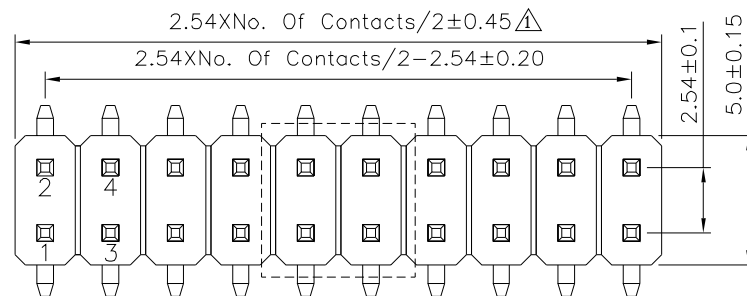

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22108

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25	X.* ±2°
.X ±0.20	.X* ±1.5°
.XX ±0.15	.XX* ±1°
.XXX ±0.10	.XXX* ±0.5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
A1		Modify Data	HZF	02/08/2017
A0		NEW RELEASE	HZF	12/01/2015