
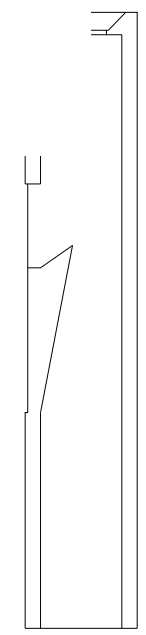
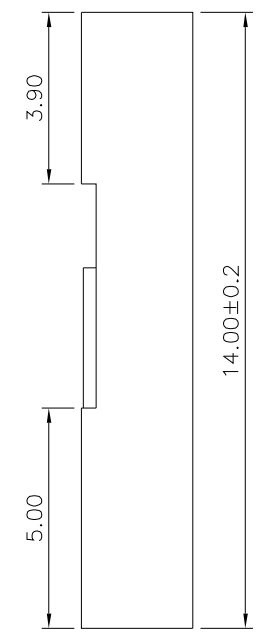
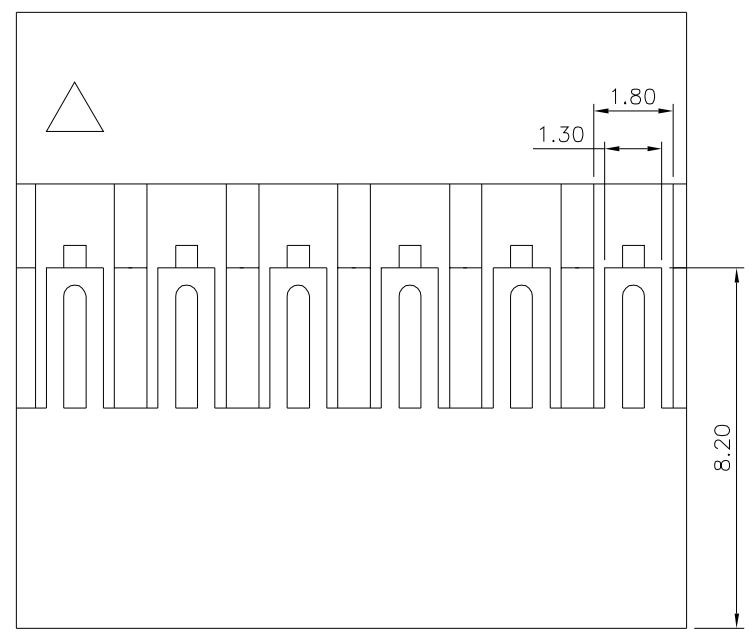


**SPECIFICATION**  
 Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Temperature Range:-25°C~+85°C  
 Material:PBT+15%G.F.(UL94V-0)  
 RoHS Complaint

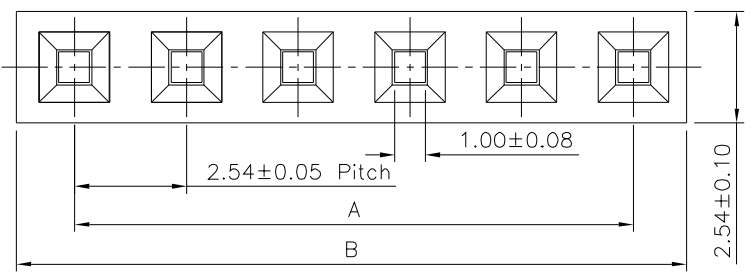

Pin	A±0.25	B±0.25	Pin	A±0.30	B±0.30
1		2.54	11	25.4	27.94
2	2.54	5.08	12	27.94	30.48
3	5.08	7.62	13	30.48	33.02
4	7.62	10.16	14	33.02	35.56
5	10.16	12.7	15	35.56	38.10
6	12.7	15.24	16	38.10	40.64
7	15.24	17.78	17	40.64	43.18
8	17.78	20.32	18	43.18	45.72
9	20.32	22.86	19	45.72	48.26
10	22.86	25.4	20	48.26	50.80
			21	50.80	53.34
			22	53.34	55.88
			23	55.88	58.42
			24	58.42	60.96
			25	60.96	63.50

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 22124  
 APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 SCALE NONE REV. B0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.25  
 .XX ±0.1  
 .XXX ±0.01  
 ANG. ±1°  
 UNIT mm

BO	NEW RELEASE	HZF	03/26/2017
NO.REV.	REVISIONS	CHK	DATE