


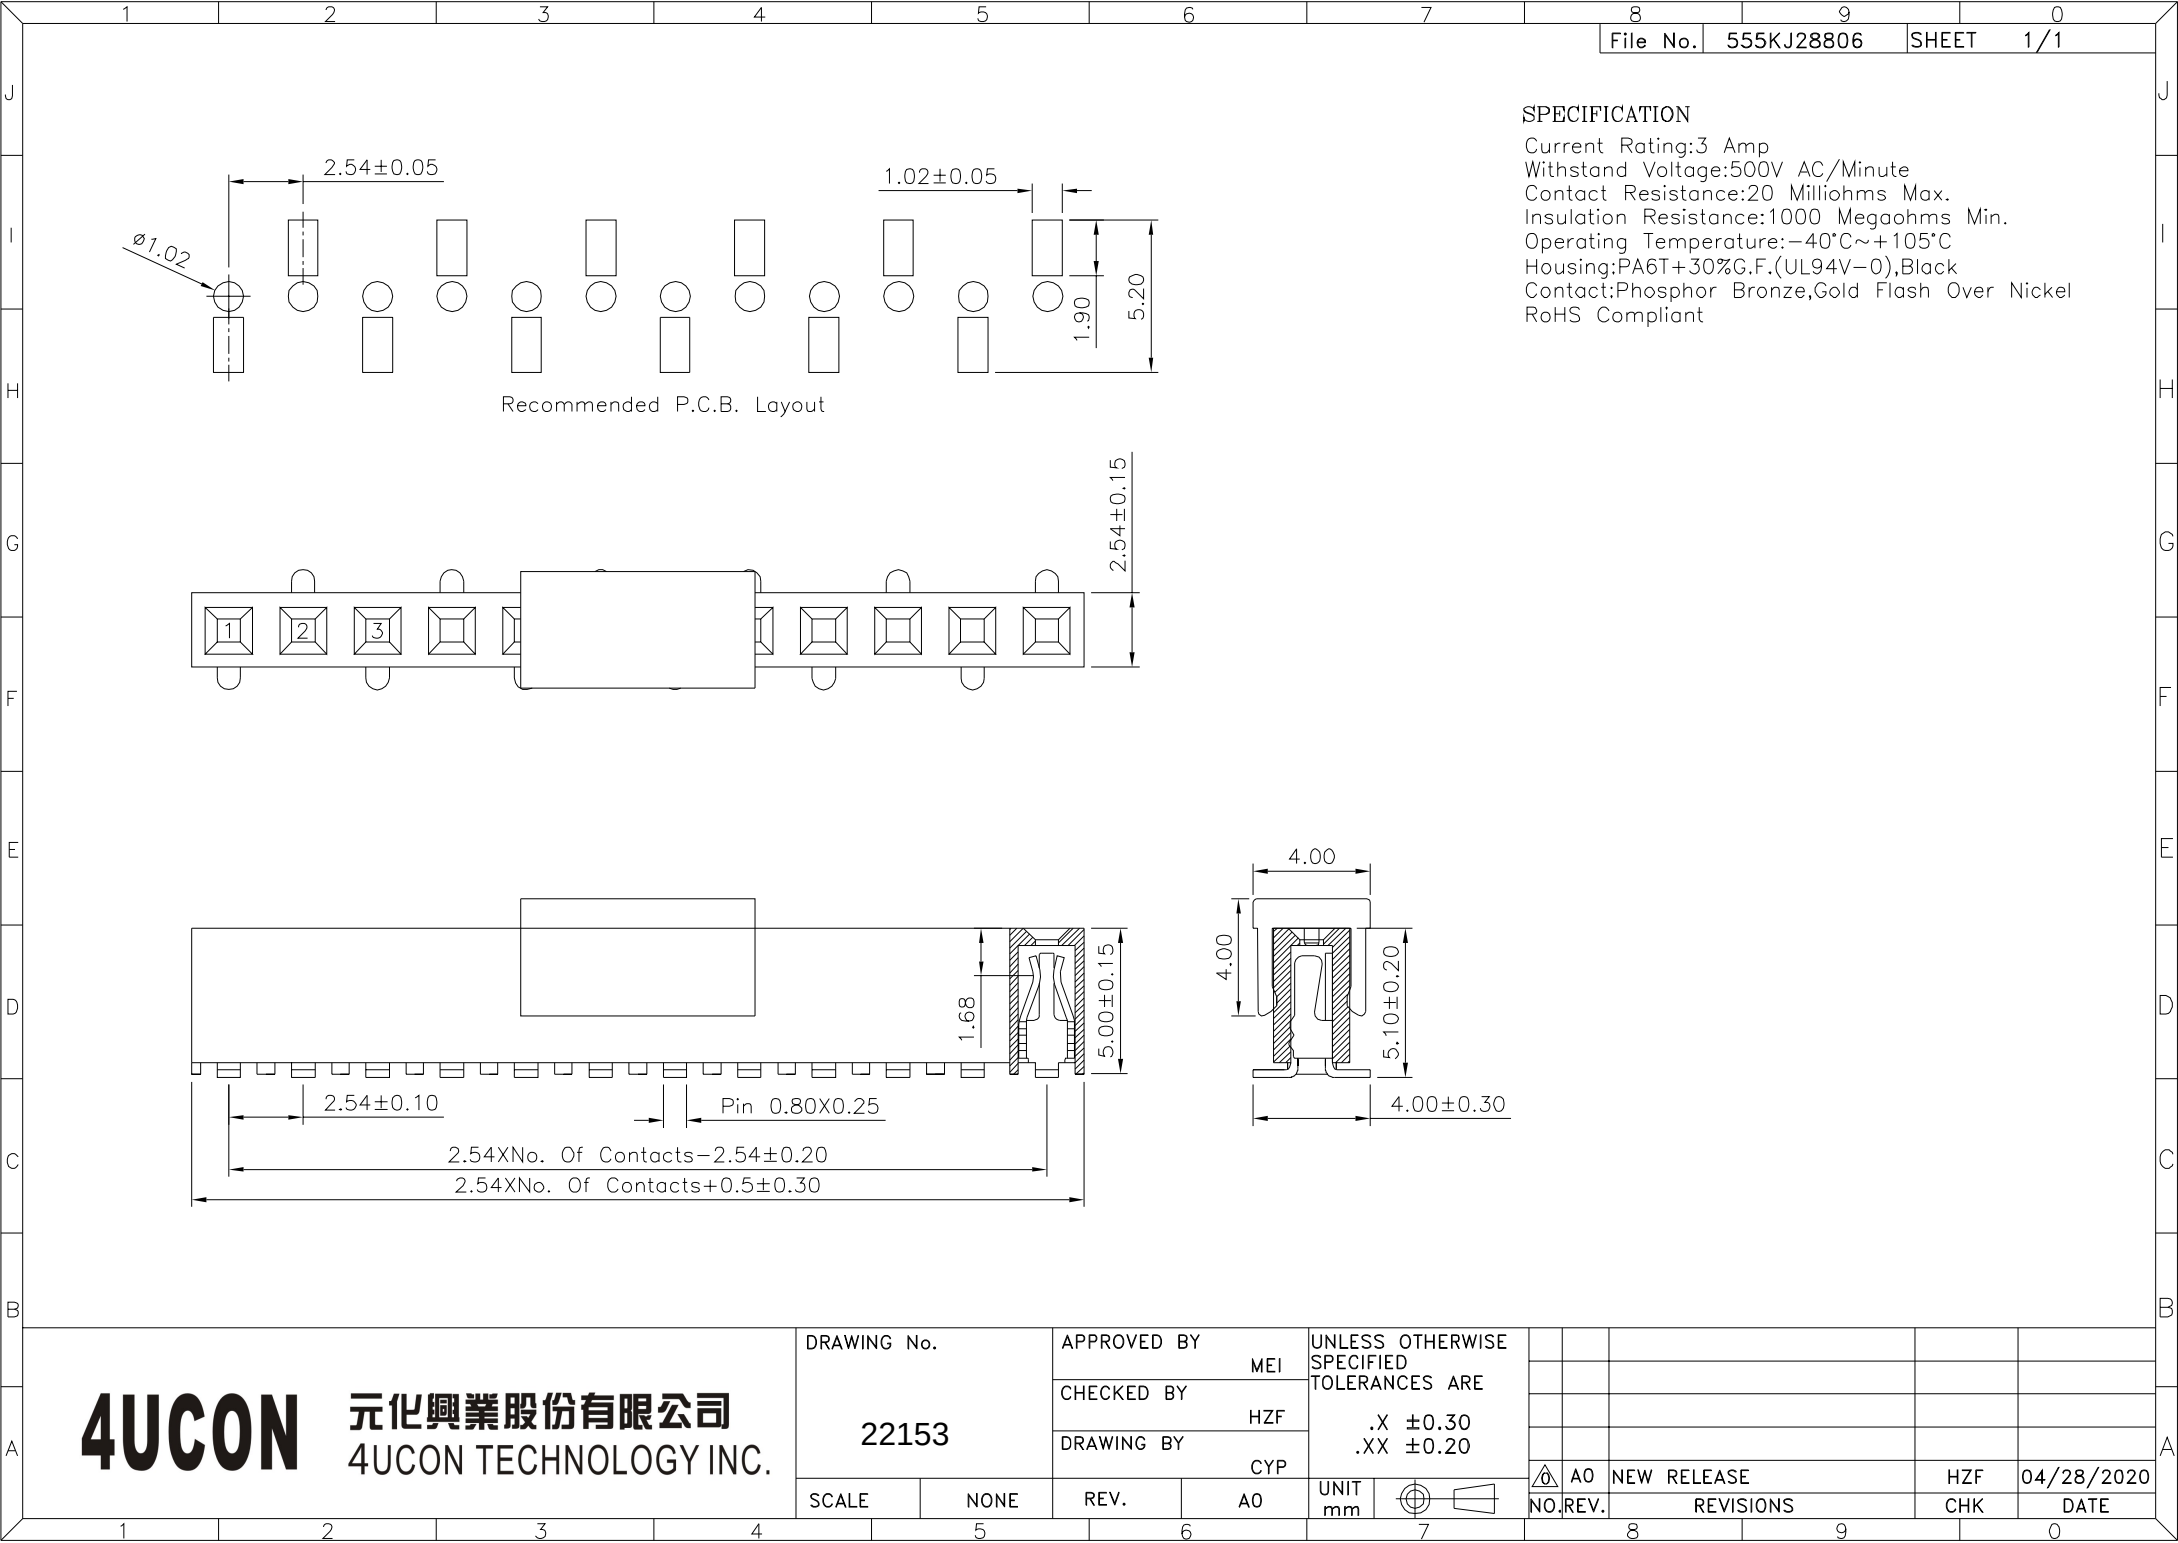


SPECIFICATION
Current Rating:3 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Housing:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
22153		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
.X	±0.30				
.XX	±0.20				
UNIT	mm				



NO.	REV.	REVISIONS	CHK	DATE
△A0		NEW RELEASE	HZF	04/28/2020