
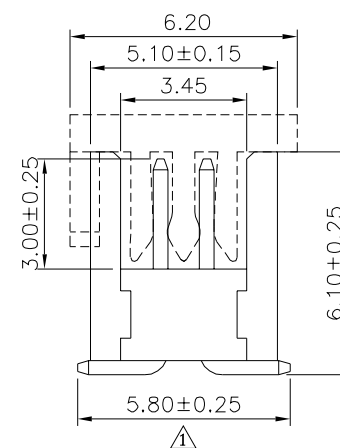
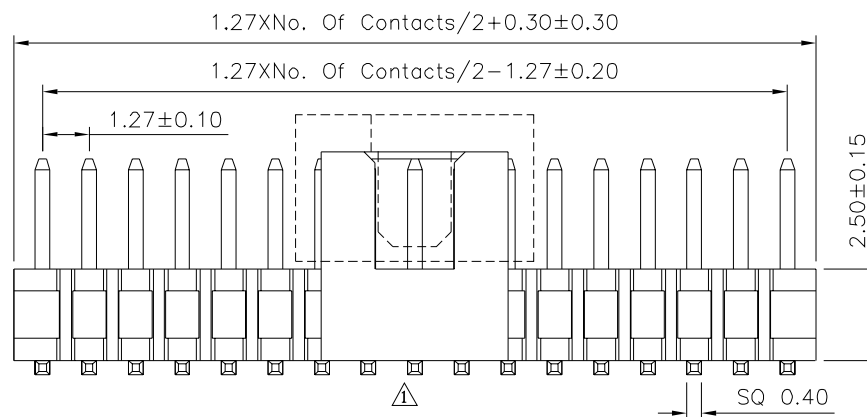
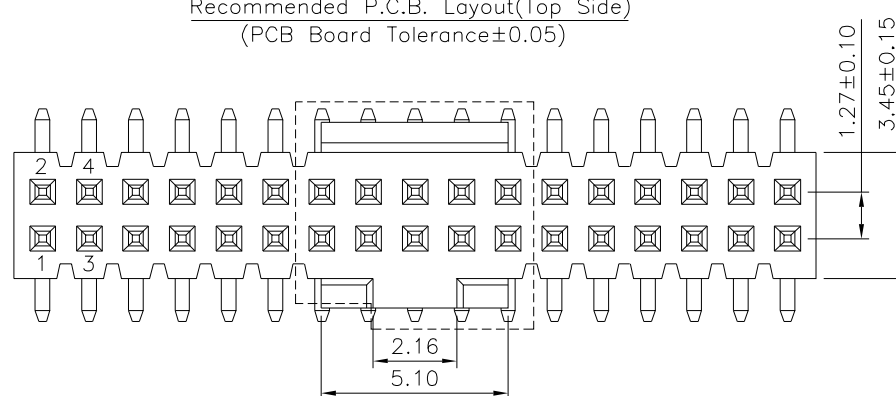


SPECIFICATION

Current Rating:1.0 Amp
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Withstand Voltage:500V AC/DC
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:LCP+30%G.F.(UL94V-0),Black
 RoHS Compliant

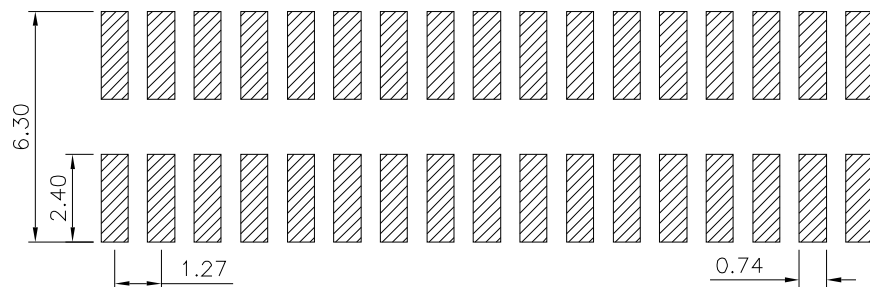

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22167

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

08/19/2021

△ A0


NEW RELEASE

HZF

01/29/2015

SPECIFICATION

Material:Conductive Polystyrene,Black
 Reel Size:13"X24mm
 Carrier Tape:24X8000mm
 Cover Tape:21.30mm(Width)

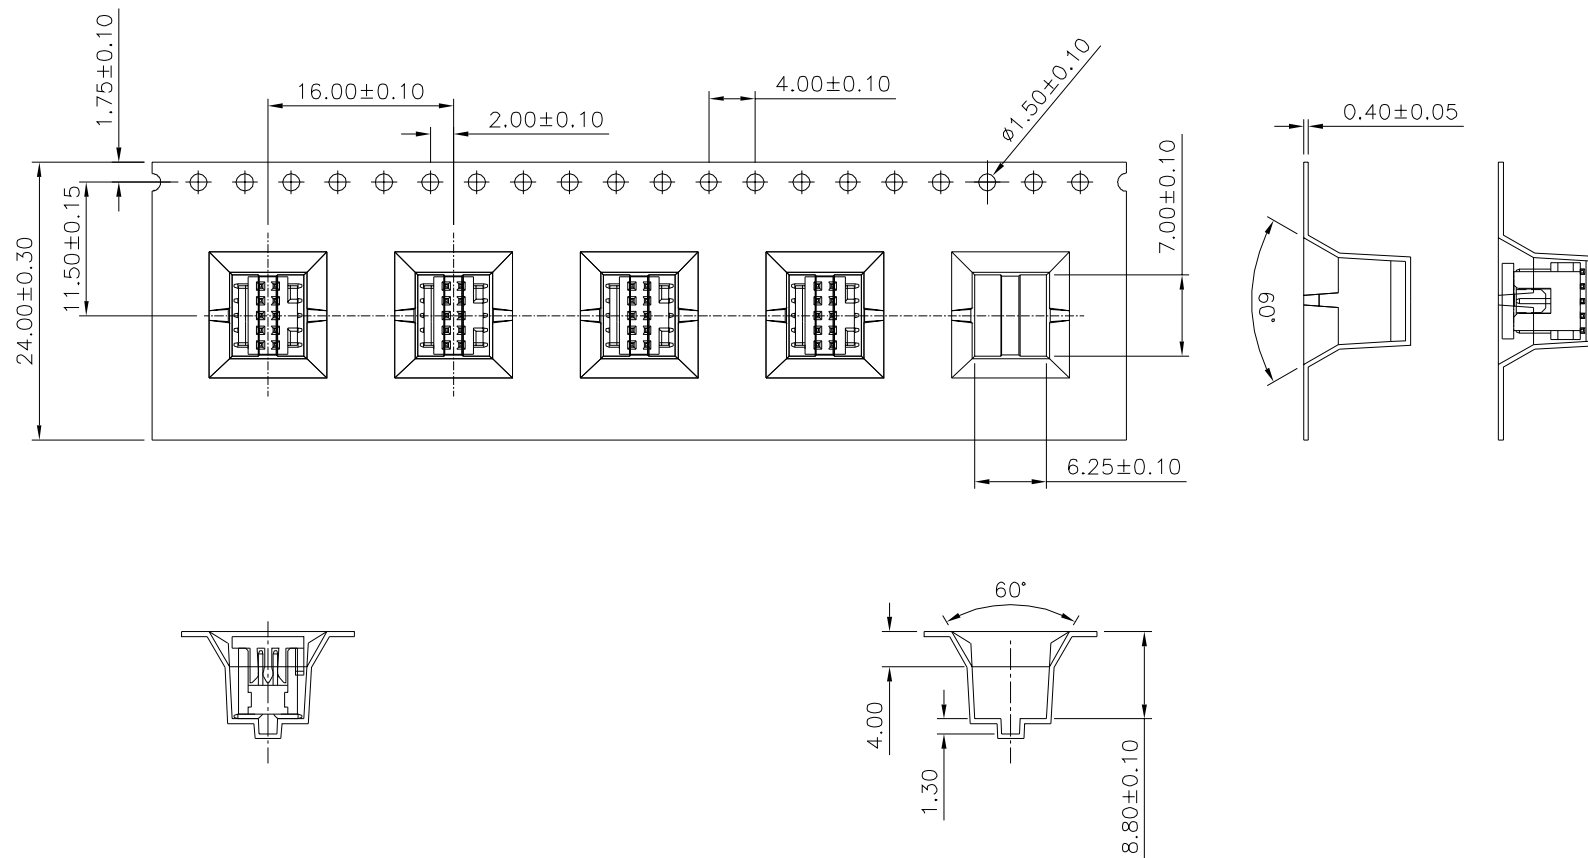

No. Of Position	Q'ty/Reel
2X05	450 PCS

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22167

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.15

.XX ± 0.15

SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

NEW RELEASE


REVISIONS

CHK

DATE

HZF

08/23/2021

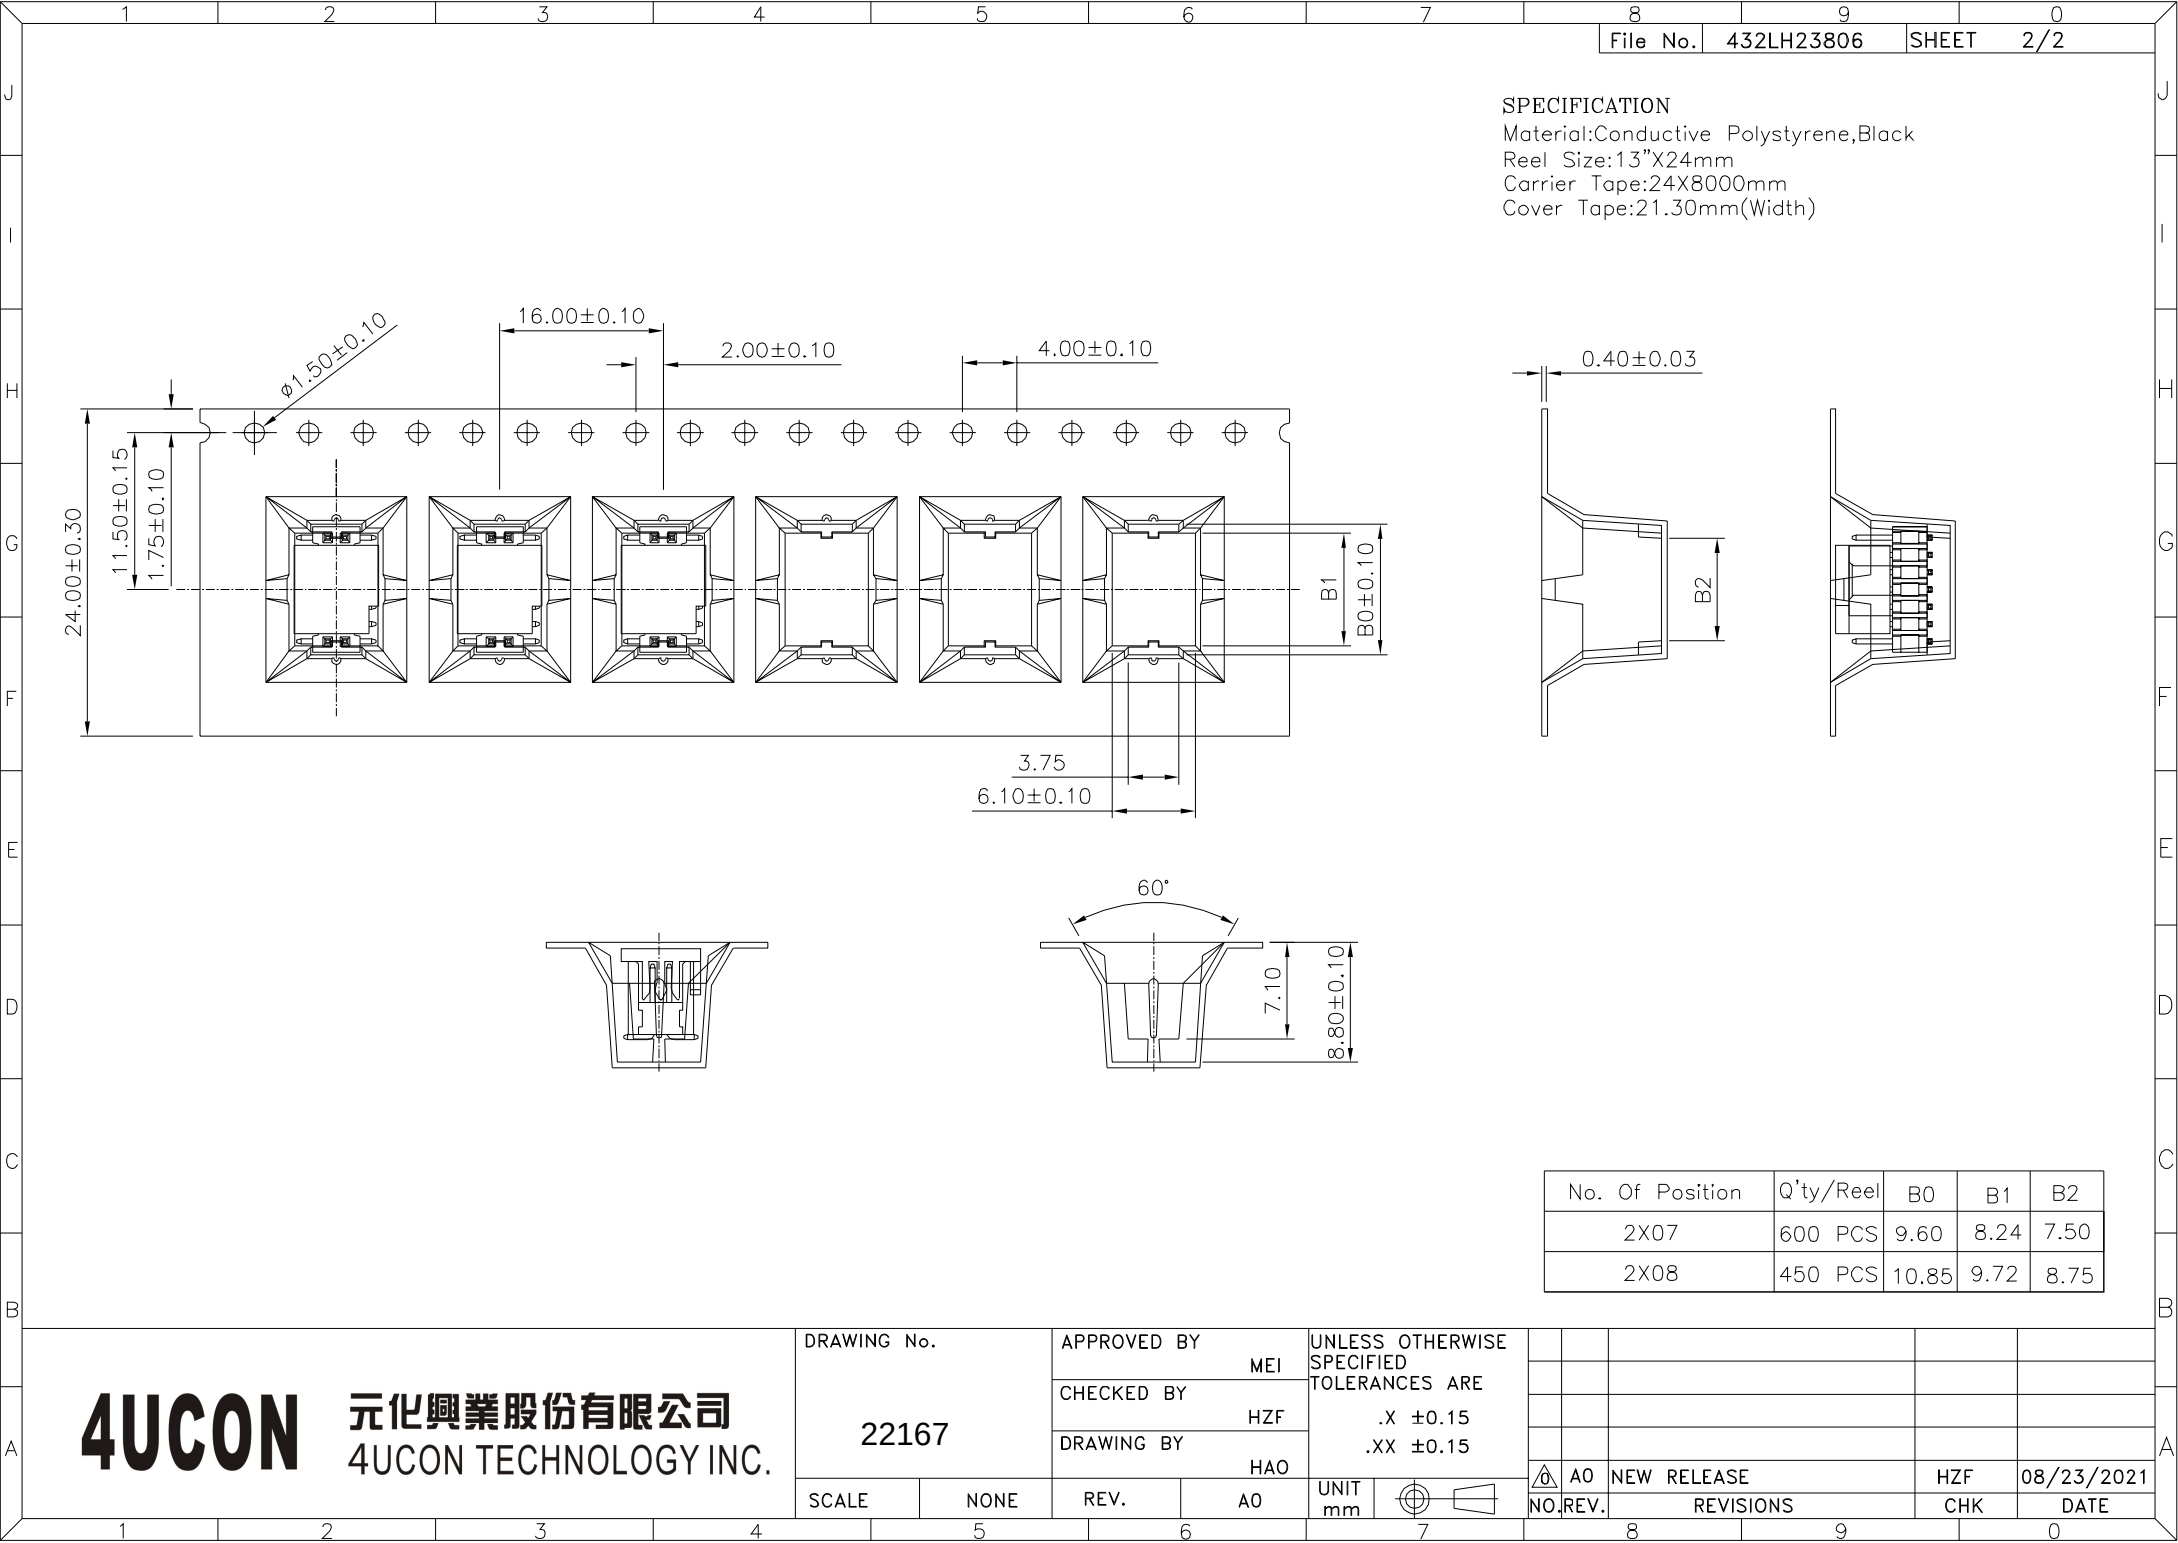

No. Of Position	Q'ty/Reel	B0	B1	B2
2X07	600 PCS	9.60	8.24	7.50
2X08	450 PCS	10.85	9.72	8.75

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
22167		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		HAO	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X ± 0.15	
.XX ± 0.15	
UNIT	mm

NO.	REV.	NEW RELEASE	HZF	08/23/2021
		REVISIONS	CHK	DATE