

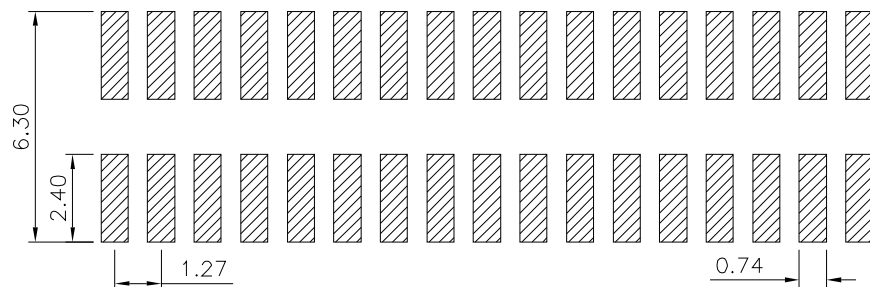
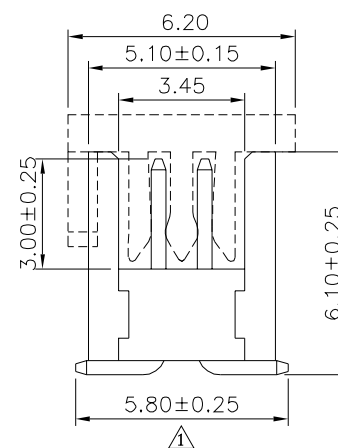


SPECIFICATION

Current Rating:1.0 Amp
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Withstand Voltage:500V AC/DC
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:LCP+30%G.F.(UL94V-0),Black
 RoHS Compliant

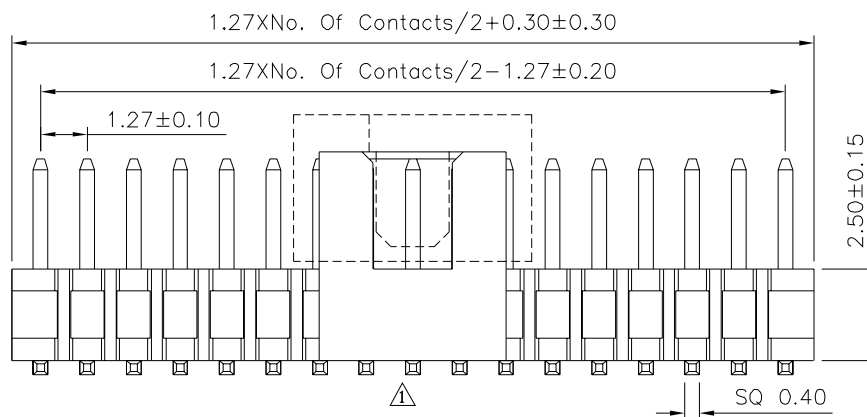

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance±0.05)

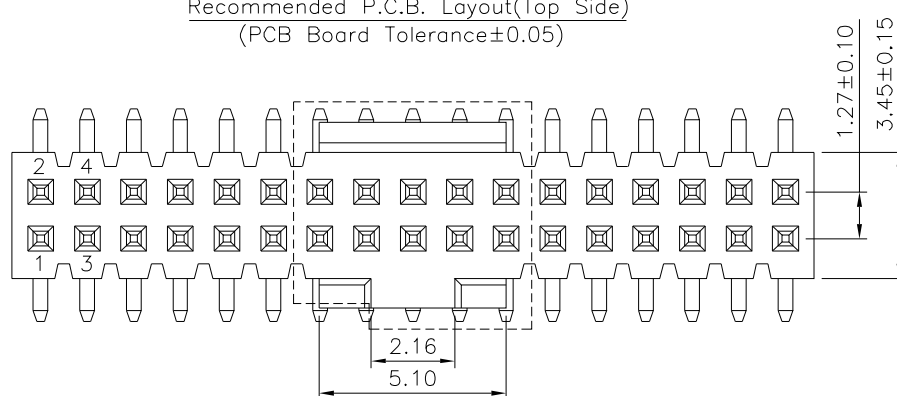

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22200

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO



REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

△ A1

Modify Data

HZF

08/19/2021

△ A0


NEW RELEASE

HZF

01/29/2015

SPECIFICATION

Material:Conductive Polystyrene,Black
 Reel Size:13"X24mm
 Carrier Tape:24X8000mm
 Cover Tape:21.30mm(Width)

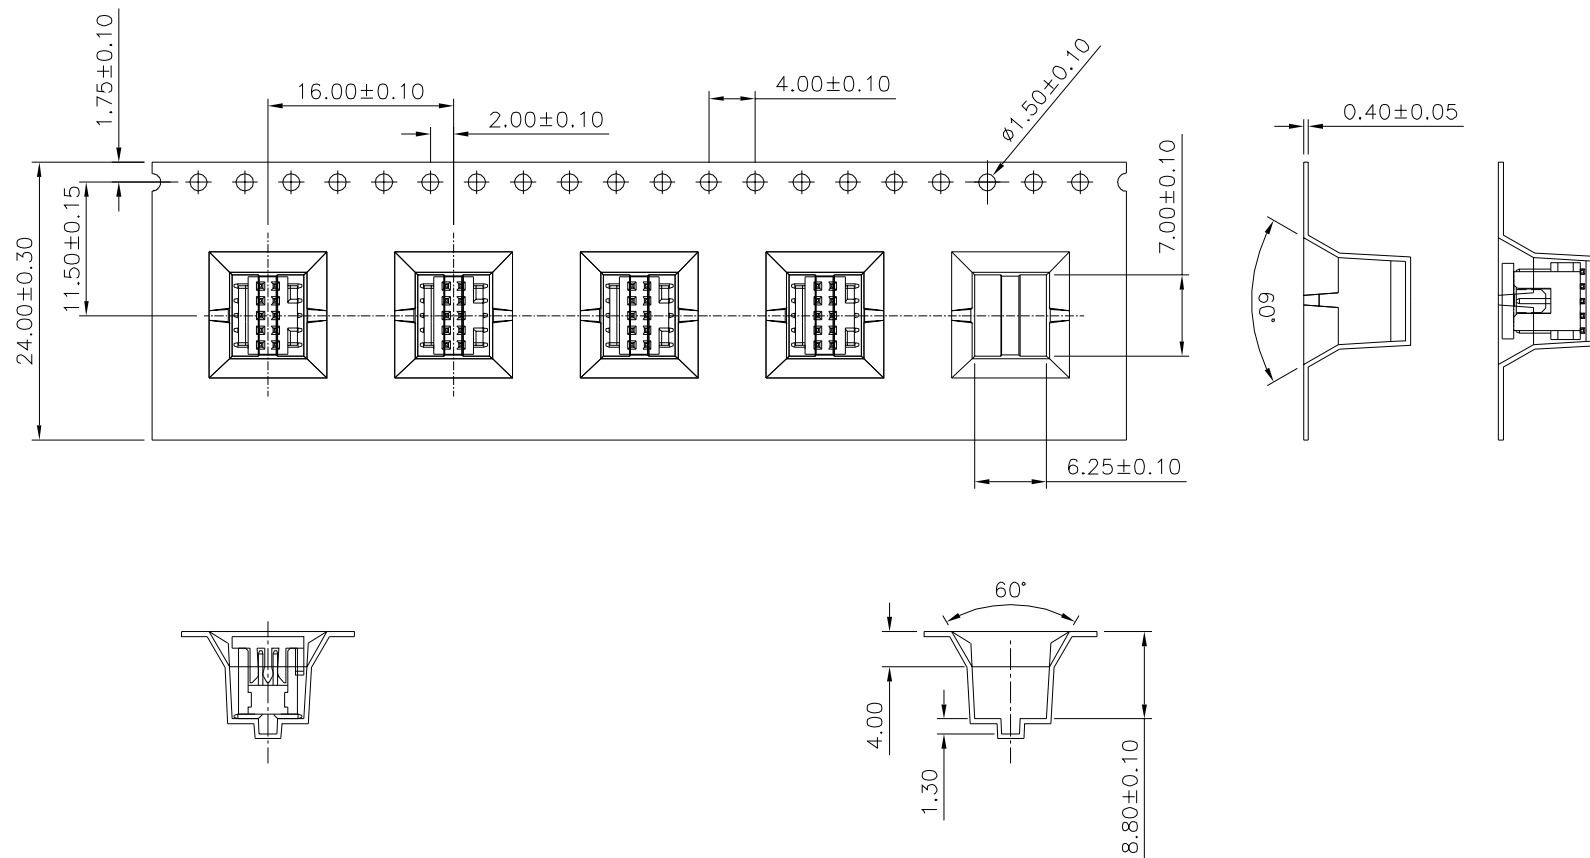

No. Of Position	Q'ty/Reel
2X05	450 PCS

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22200

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.15

.XX ± 0.15

SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

NEW RELEASE

REVISIONS





CHK

08/23/2021

DATE

SPECIFICATION

Material:Conductive Polystyrene,Black
Reel Size:13"X24mm
Carrier Tape:24X8000mm
Cover Tape:21.30mm(Width)

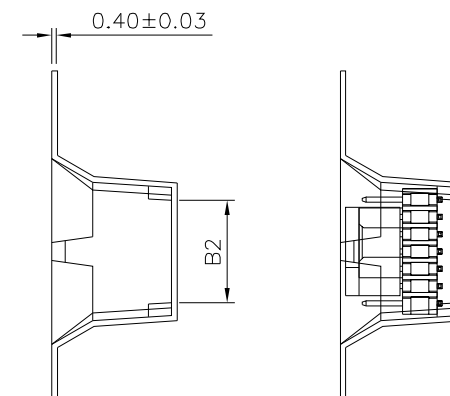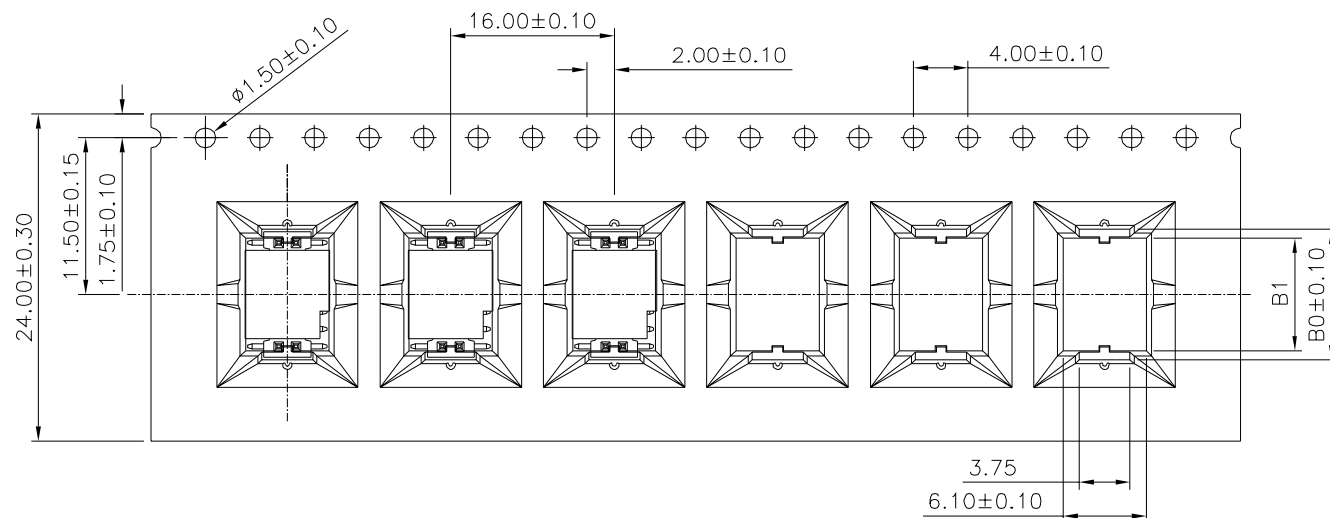

No. Of Position	Q'ty/Reel	B0	B1	B2
2X07	600 PCS	9.60	8.24	7.50
2X08	450 PCS	10.85	9.72	8.75

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22200

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

REV.

AO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ± 0.15

.XX ±0.15

UNIT	mm
------	----



△	AO
NO.	REV.

NEW RELEASE

REVISIONS

HZF

08/23/2021

CHK

	DATE
--	------