

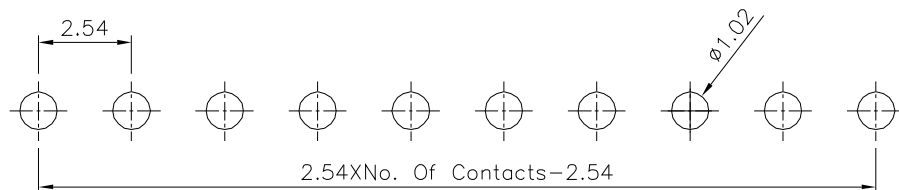
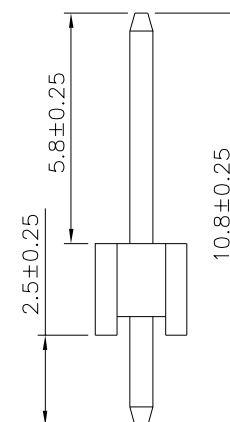


SPECIFICATION
 Current Rating:3 Amps
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

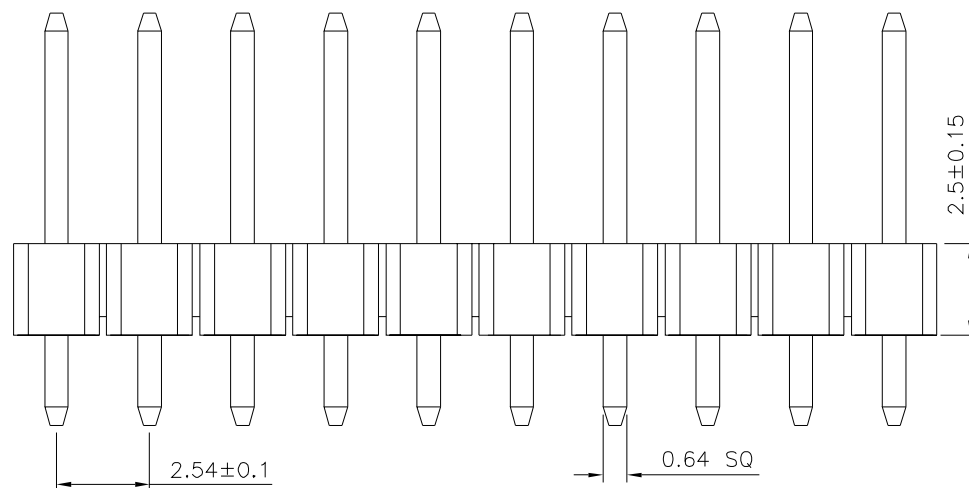

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

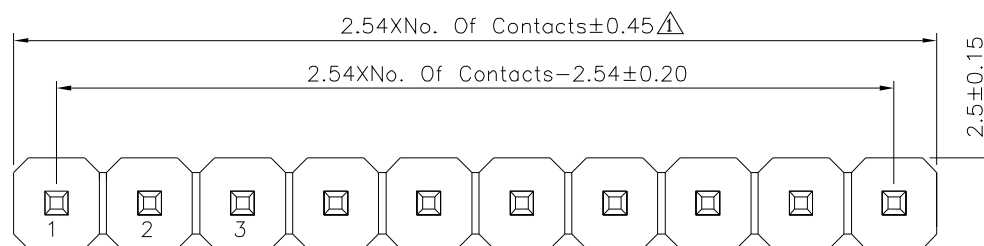

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
22213		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.25 X.* ±2"
 .X ±0.20 .X* ±1.5"
 .XX ±0.15 .XX* ±1"
 .XXX ±0.10 .XXX* ±0.5"
 UNIT mm

NO.	REV.	REVISIONS		CHK	DATE
1	A1	Modify Data		HZF	12/02/2021
1	A0	NEW RELEASE		HZF	01/04/2015