
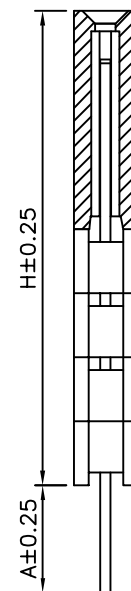
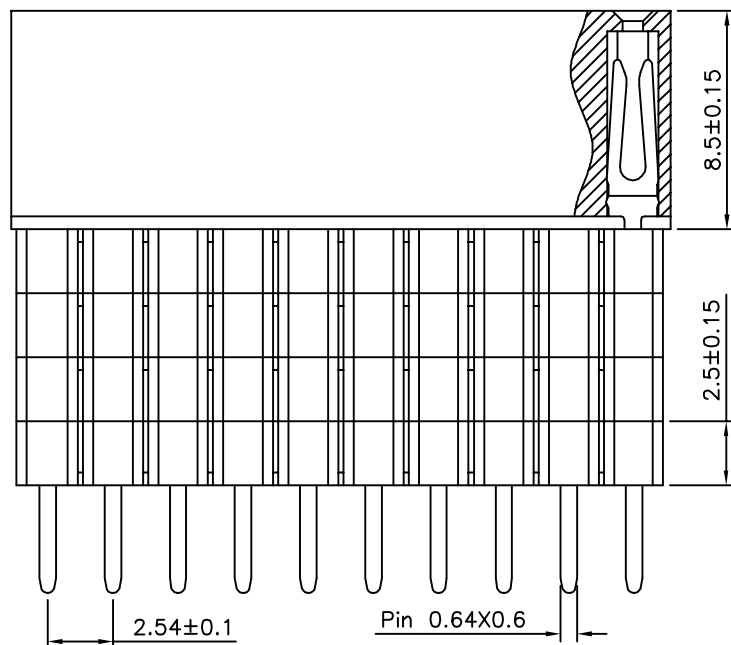


Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance ± 0.05)

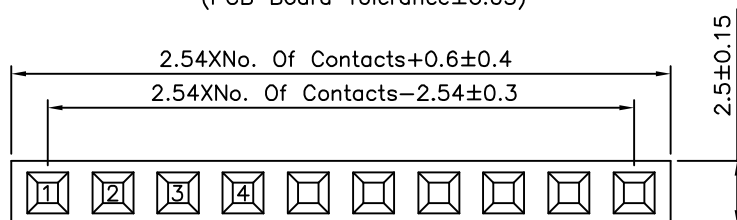

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22343

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X. $\pm 2^{\circ}$
.X ± 0.20 .X $\pm 1.5^{\circ}$
.XX ± 0.15 .XX $\pm 1^{\circ}$
.XXX ± 0.10 .XXX $\pm 0.5^{\circ}$

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

HZF

12/11/2014

CHK

DATE