


SPECIFICATION

Current Rating:1Amp
Withstanding Voltage:500V AC
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Mating Force:3.5Kg Max.
Unmating Force:1Kg Min.
Durability:1500 Cycles
RoHS Compliant

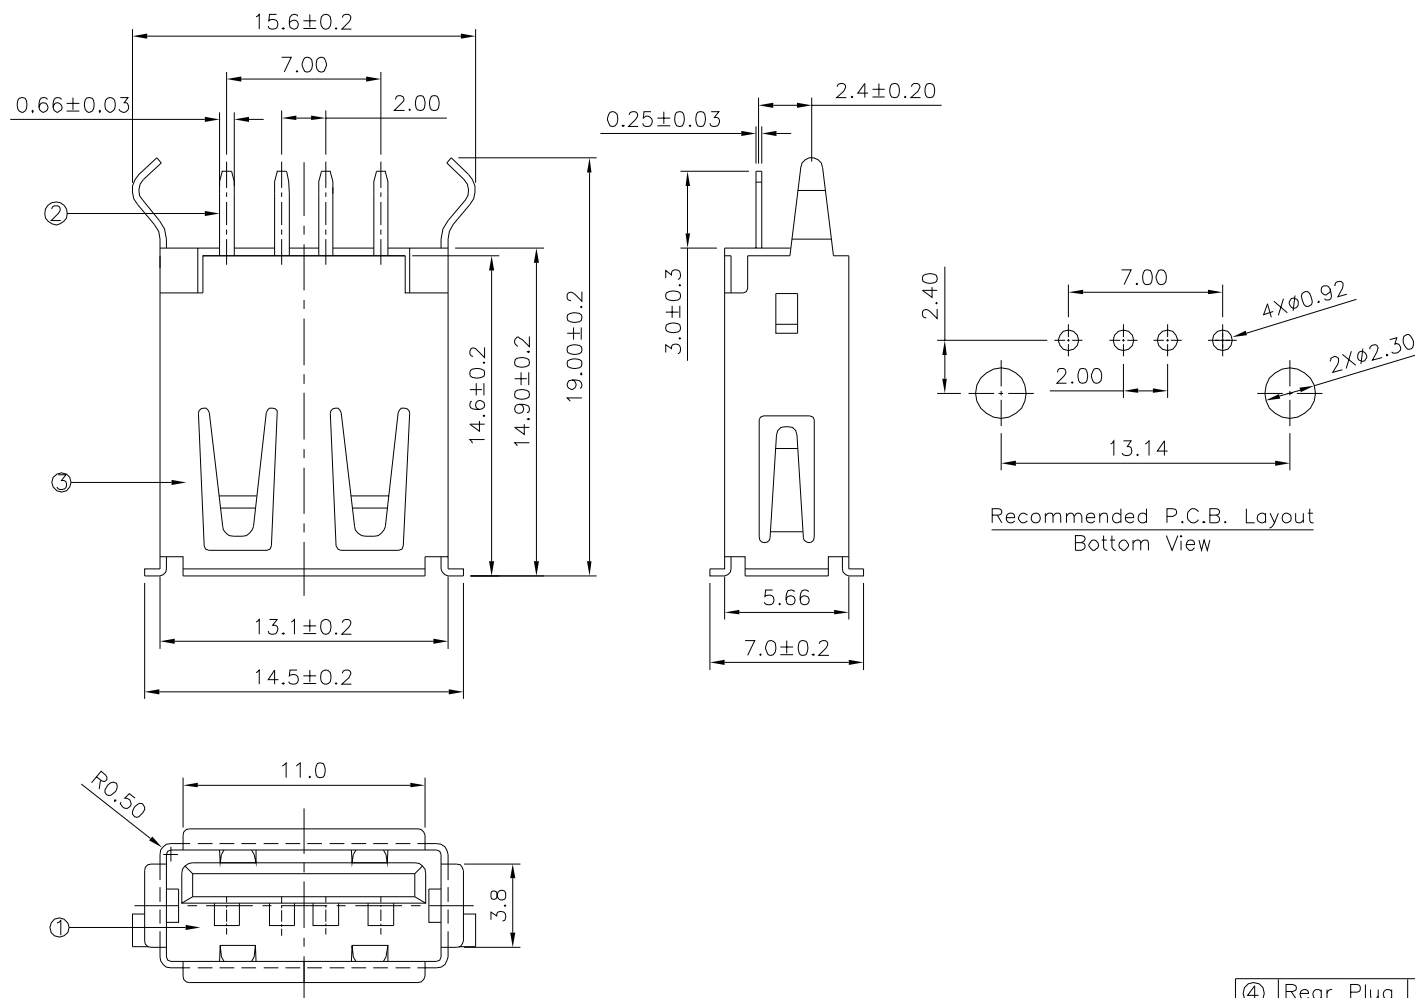

④	Rear Plug	PBT+30%G.F.		1
③	Housing	PBT+30%G.F.	White	1
②	Contact	Phosphor Bronze	Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel	4
①	Shell	Brass	Nickel Plated	1
No.	Description	Material	Remark	Q'ty

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22348

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

LZX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.50 X.* $\pm 2.0^*$
.X ± 0.20 .X* $\pm 1.0^*$
.XX ± 0.10 .XX* $\pm 0.5^*$

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

AO

01/07/2022

HZF

01/07/2022

01/07/2022