


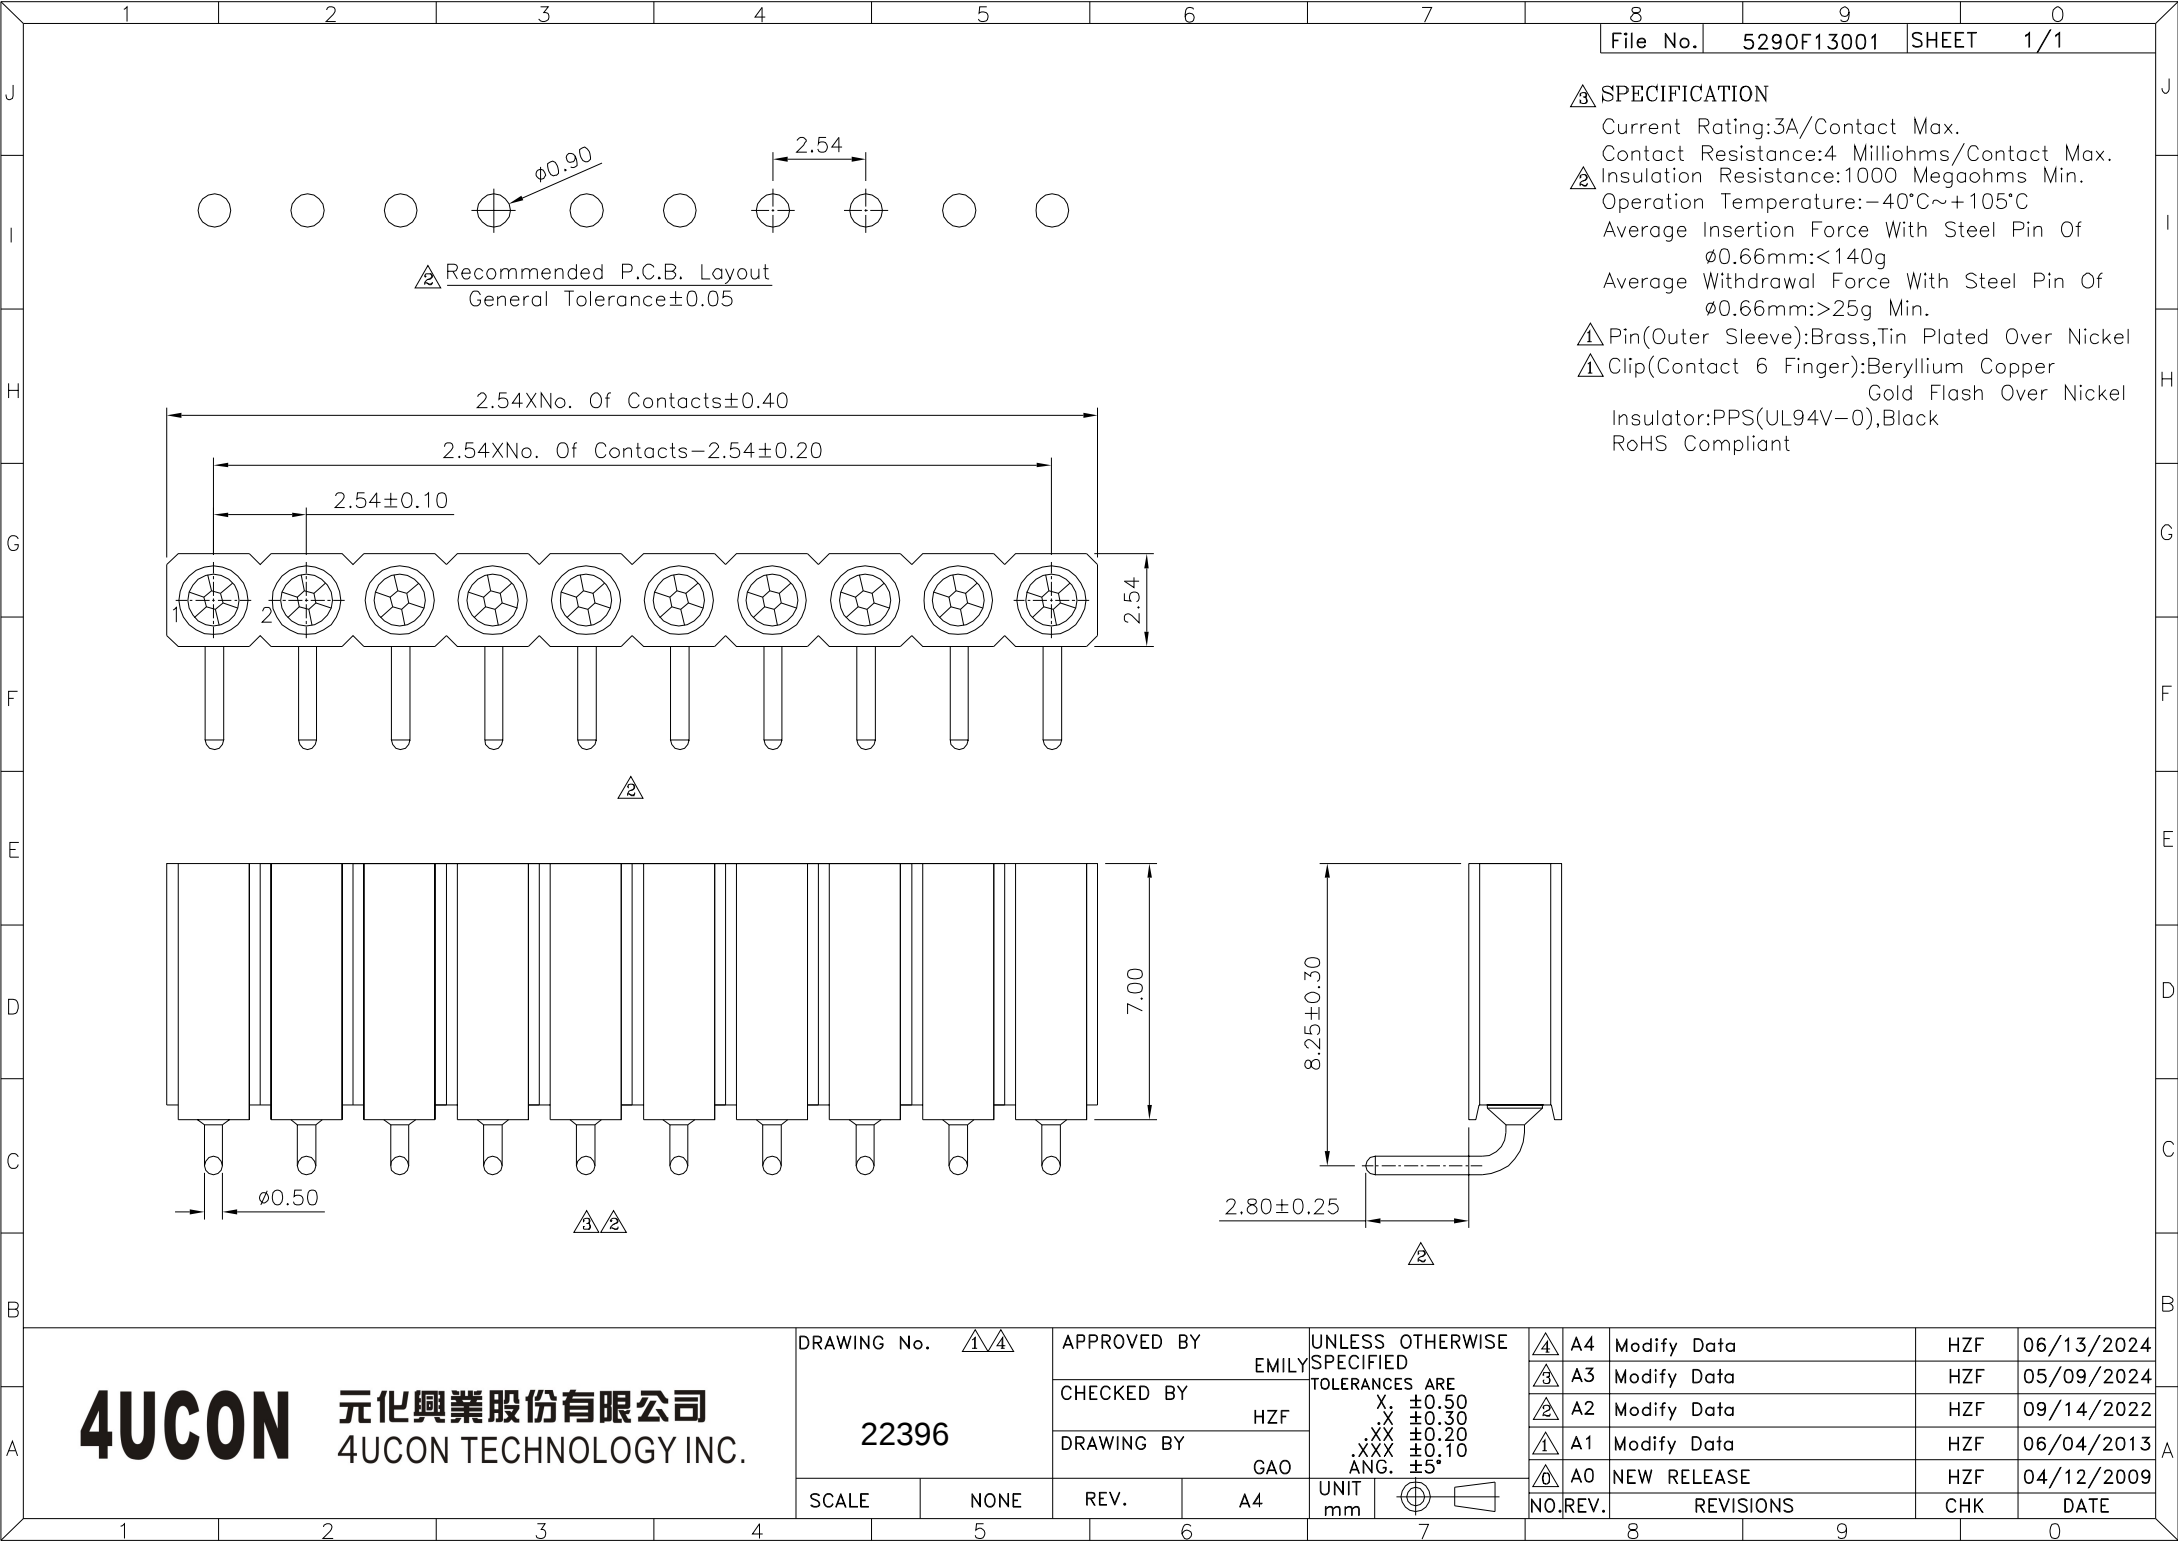

File No. 5290F13001 SHEET 1/1

△ SPECIFICATION
Current Rating:3A/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
△ Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Average Insertion Force With Steel Pin Of Ø0.66mm:<140g
Average Withdrawal Force With Steel Pin Of Ø0.66mm:>25g Min.
△ Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
△ Clip(Contact 6 Finger):Beryllium Copper Gold Flash Over Nickel
Insulator:PPS(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.  22396		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X. ±0.30 XX ±0.20 XXX ±0.10 ANG. ±5°	 A4	Modify Data	HZF	06/13/2024	
		EMILY			 A3	Modify Data	HZF	05/09/2024	
		CHECKED BY			 A2	Modify Data	HZF	09/14/2022	
		HZF			 A1	Modify Data	HZF	06/04/2013	
DRAWING BY		GAO		 A0	NEW RELEASE	HZF	04/12/2009		
SCALE	NONE	REV.	A4	UNIT mm		NO. REV.	REVISIONS	CHK	DATE
	5		6		7		8	9	0