File No.	697MI26806	SHEET	1/1

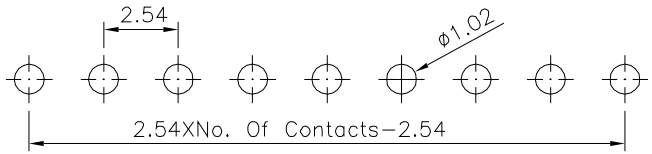

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

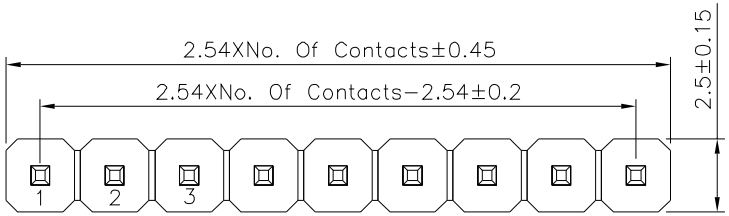

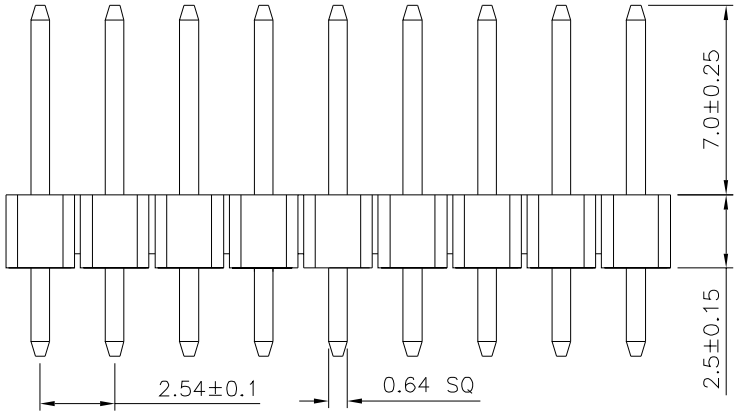

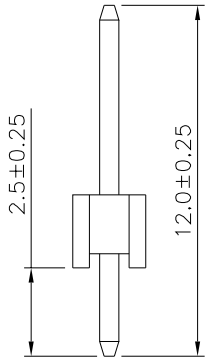

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V−0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	CHECKED BY	DRAWING BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
22411	MEI	HZF	LZX	X. ±0.25 X.° ±2° .X ±0.20 .X° ±1.5° .XX ±0.15 .XX° ±1° .XXX ±0.10 .XXX° ±0.5°			
SCALE NONE	REV. A0	UNIT mm		NO.	REV.	REVISIONS	CHK / DATE
				△0	A0	NEW RELEASE	HZF 09/26/2022