


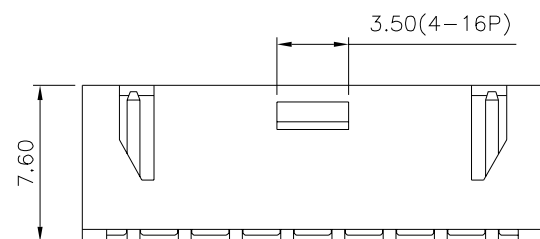


SPECIFICATION

Current Rating:3A AC,DC
Voltage Rating:250V AC,DC
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA9T(UL94V-0),Beige
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

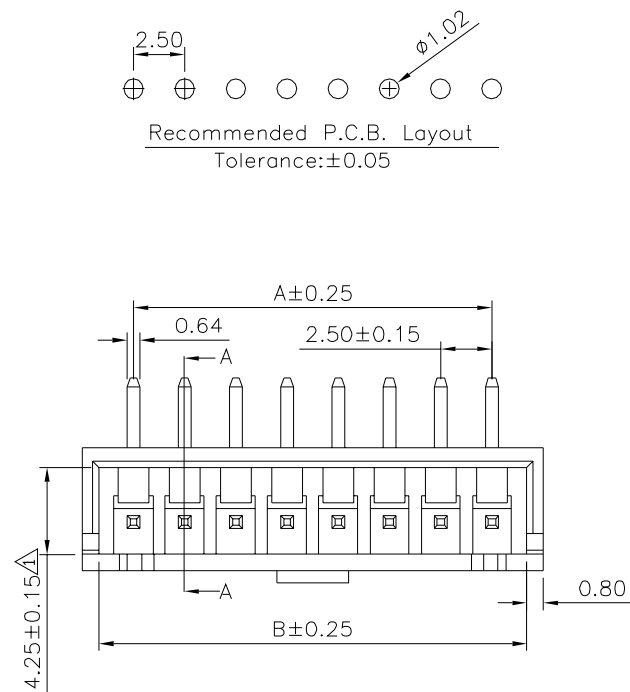

Pin	A	B
2	2.50	5.90
3	5.00	8.40
4	7.50	10.90
5	10.00	13.40
6	12.50	15.90
7	15.00	18.40
8	17.50	20.90
9	20.00	23.40
10	22.50	25.90
11	25.00	28.40
12	27.50	30.90
13	30.00	33.40
14	32.50	35.90
15	35.00	38.40
16	37.50	40.90

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
22454

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±2°

SCALE NONE REV. A1 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	04/08/2022
△	A0	NEW RELEASE	HZF	06/09/2020