

# SPECIFICATION

## 1.Material&Finish

Insulator:LCP(UL94V-0),Black  
Contact:Brass,Tin Plated  
Solder Tabs:Brass,Tin Plated


## 2.Electrical Characteristics

Current Rating:5A AC,DC  
Voltage Rating:250V AC,DC  
Withstanding Voltage:1500V AC/Minute  
Insulation Resistance:1000 Megaohms Min.  
Contact Resistance:20 Milliohms Max.





## 3.Environmental Characteristics

Temperature Range:-40°C~+105°C

## 4.RoHS Compliant

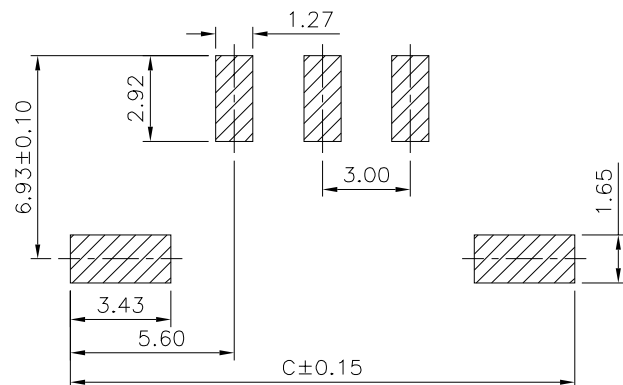

Recommended P.C.B. Layout  
Top View,Tolerance:±0.05

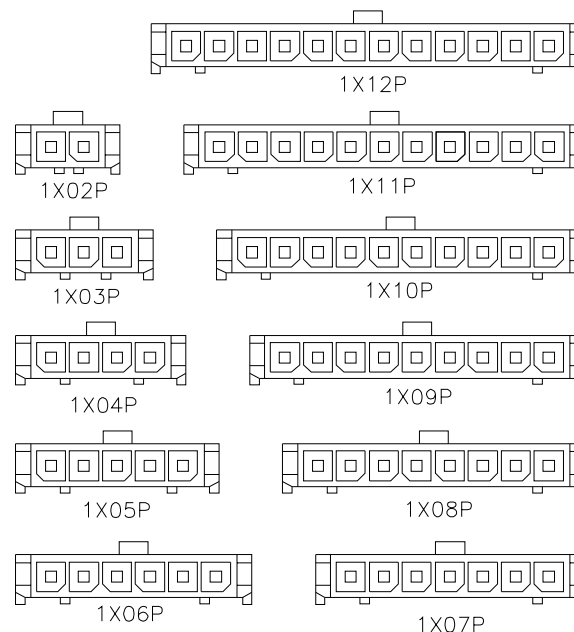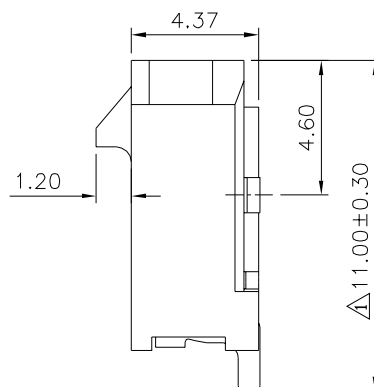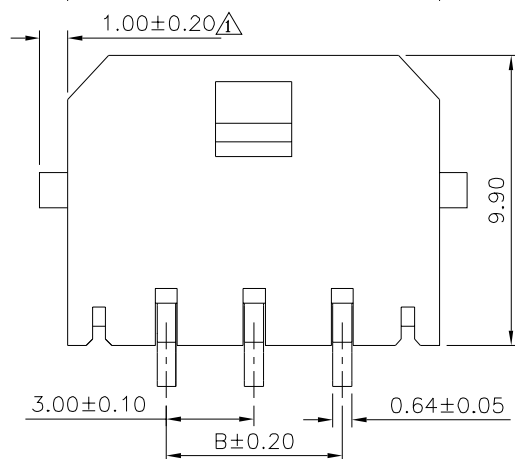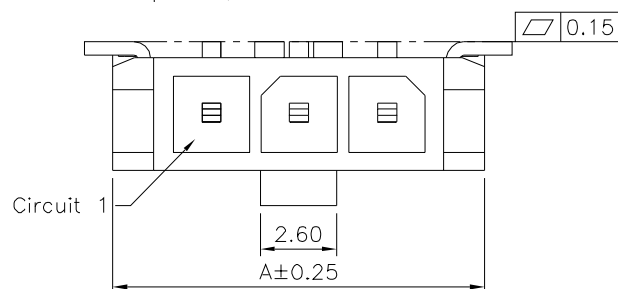

| Pin | A     | B     | C     |
|-----|-------|-------|-------|
| 02  | 9.65  | 3.00  | 14.20 |
| 03  | 12.65 | 6.00  | 17.20 |
| 04  | 15.65 | 9.00  | 20.20 |
| 05  | 18.65 | 12.00 | 23.20 |
| 06  | 21.65 | 15.00 | 26.20 |
| 07  | 24.65 | 18.00 | 29.20 |
| 08  | 27.65 | 21.00 | 32.20 |
| 09  | 30.65 | 24.00 | 35.20 |
| 10  | 33.65 | 27.00 | 38.20 |
| 11  | 36.65 | 30.00 | 41.20 |
| 12  | 39.65 | 33.00 | 44.20 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

22463

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

REV.

B1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.30  
XX ±0.25  
XXX ±0.20  
XXX ±0.05  
ANG. ±1°  
UNIT  
mm



NO.

REV.

B1 Modify Data

B0 NEW RELEASE

REVISIONS

HZF

HZF

CHK

DATE

04/25/2022

11/07/2019