
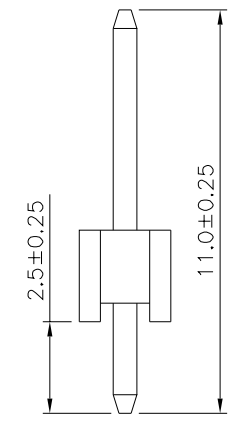
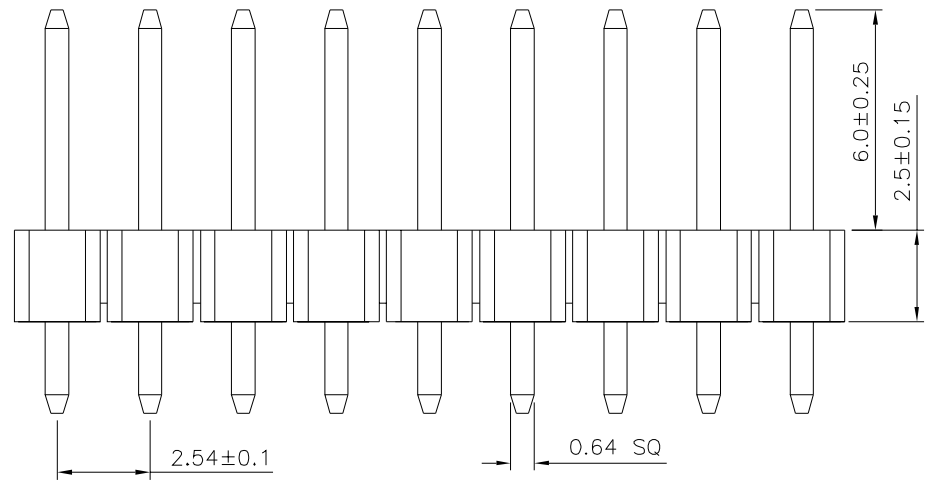


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

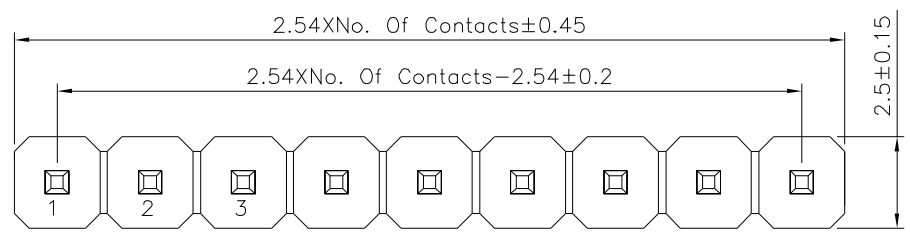

**SPECIFICATION**  
 Current Rating:3 Amps  
 Withstand Voltage:1000V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PA9T(UL94V-0),Black  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
22482		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY LZJ		X. ±0.25 X.* ±2" .X ±0.20 .X* ±1.5" .XX ±0.15 .XX* ±1" .XXX ±0.10 .XXX* ±0.5"
NONE	REV.	A0	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	03/14/2023