



SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:150V AC/DC
Withstanding Voltage:1000V AC/Minute
Contact Resistance:10 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
Operation Temperature:-25°C~+85°C
Insulator:PA66+15%G.F.(UL94V-0)
RoHS Compliant





Latch And Polarization Rib Location



2P



3P

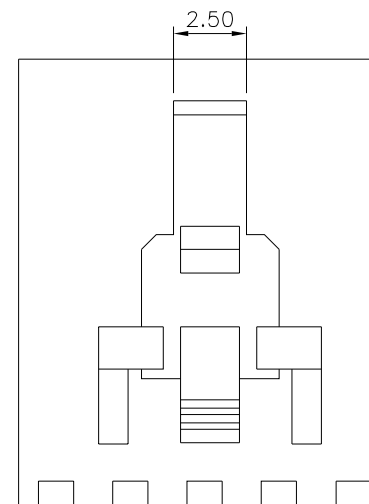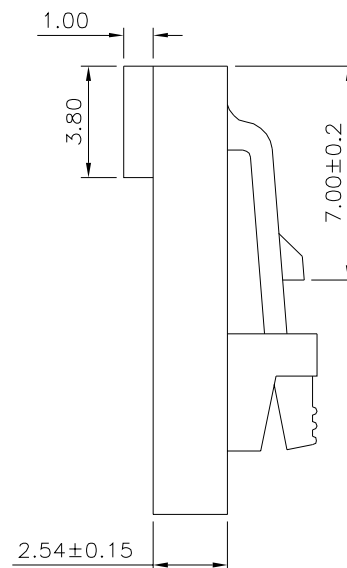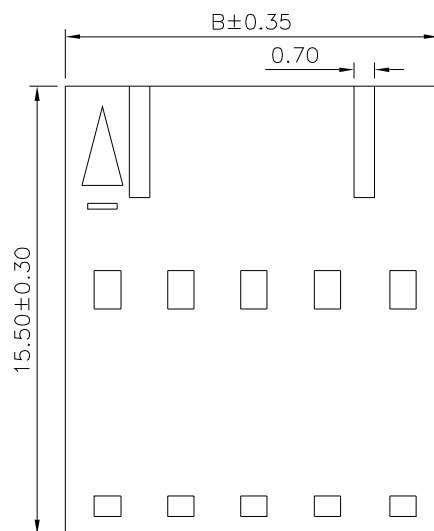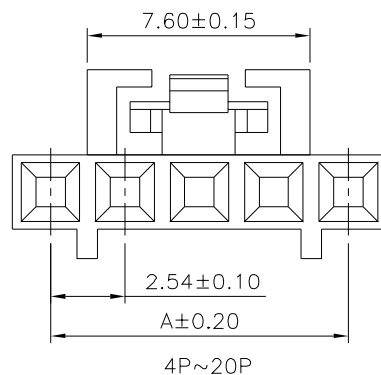

Pin	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22530

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

10/03/2012