

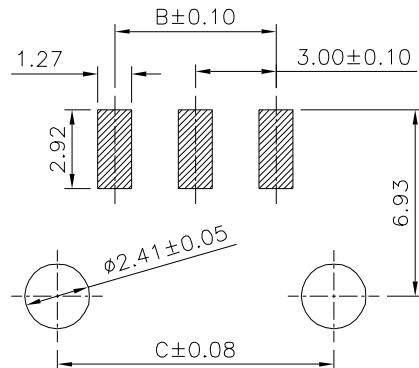
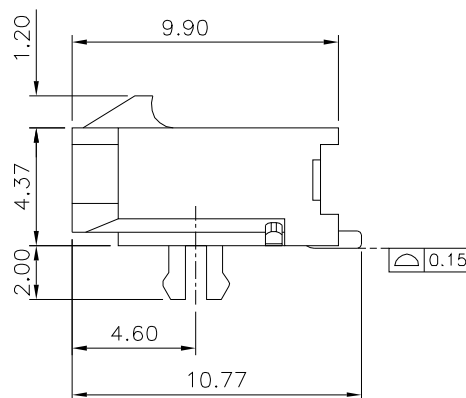
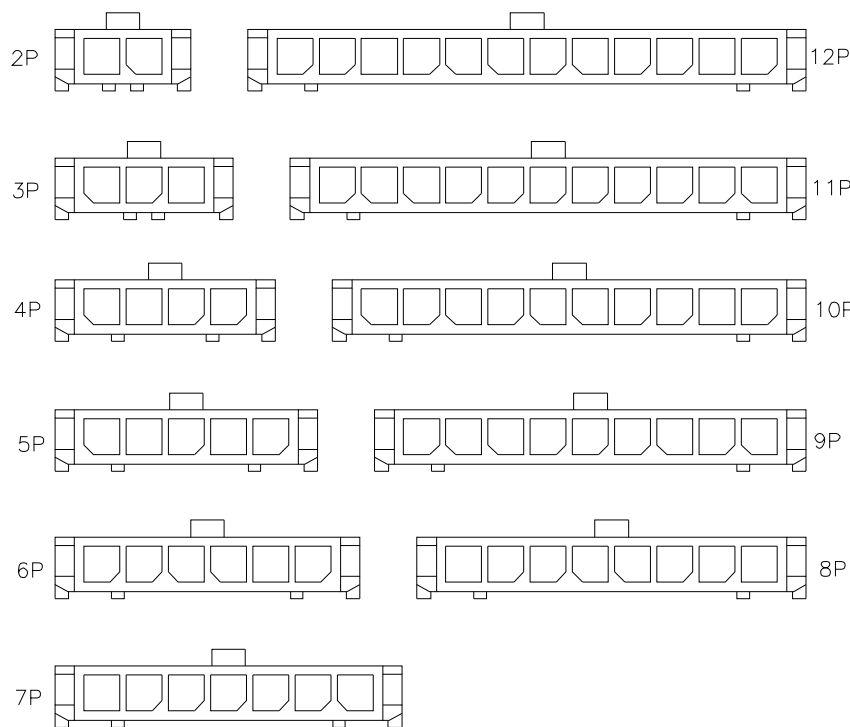


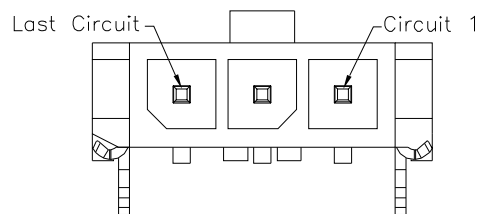

Recommended P.C.B. Layout  
(PCB Board Tolerance±0.05)

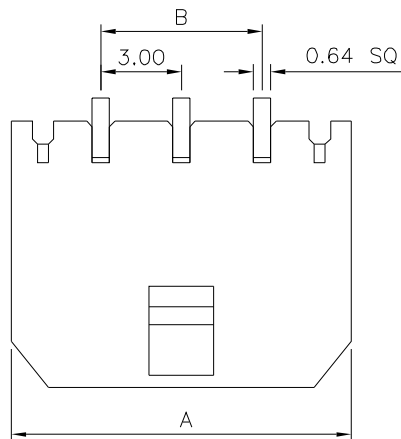

## SPECIFICATION

### 1.Material&Finish

Insulator:LCP+30%G.F.(UL94V-0)

Contact:Brass,Tin Plated Over Nickel

### 2.Electrical Characteristics

Current Rating:5.0A

Contact Resistance:10 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Withstand Voltage:1000V AC/Minute

### 3.Environmental Characteristics

Temperature Range:-25°C~+85°C

### 4.RoHS Compliant

| Pin | A     | B     | C     |
|-----|-------|-------|-------|
| 02  | 9.65  | 3.00  | 7.30  |
| 03  | 12.65 | 6.00  | 10.30 |
| 04  | 15.65 | 9.00  | 13.30 |
| 05  | 18.65 | 12.00 | 16.30 |
| 06  | 21.65 | 15.00 | 19.30 |
| 07  | 24.65 | 18.00 | 22.30 |
| 08  | 27.65 | 21.00 | 25.30 |
| 09  | 30.65 | 24.00 | 28.30 |
| 10  | 33.65 | 27.00 | 31.30 |
| 11  | 36.65 | 30.00 | 34.30 |
| 12  | 39.65 | 33.00 | 37.30 |

4UCON

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

22547

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


LZX

REV.

A0

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.40  
.XX ±0.25  
.XXX ±0.15  
ANG. ±3°

UNIT  
mm



NO. REV.

NEW RELEASE  
REVISIONS

CHK

DATE  
02/07/2023