

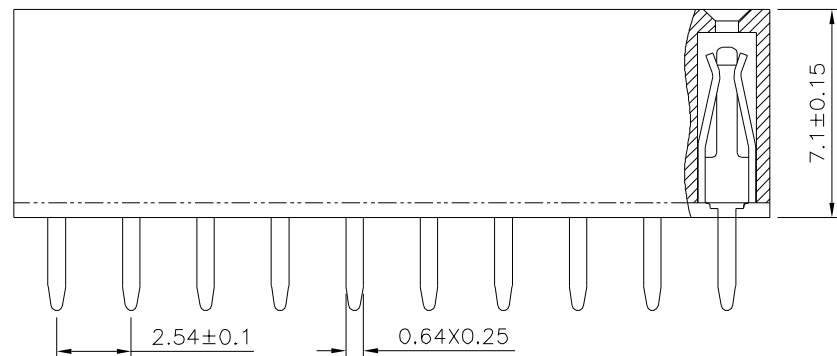


Recommended P.C.B Layout(Top View)

(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:3 Amps
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Withstand Voltage:1000V AC Min./Minute
Operation Temperature:−40°C~+105°C
Insulator:PA9T(UL94V−O),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

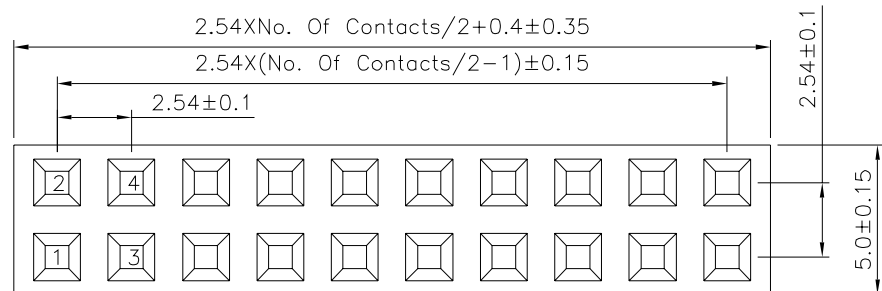

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22566

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

ZHJ

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25	X* $\pm 2^{\circ}$
.X ± 0.20	.X* $\pm 1.5^{\circ}$
.XX ± 0.15	.XX* $\pm 1^{\circ}$
.XXX ± 0.10	.XXX* $\pm 0.5^{\circ}$

UNIT	mm
------	----



○

AO	
----	--

NEW RELEASE

HZF

01/25/2023

NO.	REV.
-----	------

REVISIONS

CHK

DATE _____