

SPECIFICATION

Current Rating:5 Amp/Way Max.

Voltage Rating:300V AC

Withstanding Voltage:2500V AC(1 Minute)

Test Time=60s/PCS

Contact Resistance:20 Milliohms Max.

Wire Range:16~20 AWG




Operation Temperature:-40°C~+105°C

Test Temperature:250°C±10°C 5 Seconds Max.


Surface Of Solder Tails:Copper Alloy,Tin Plated

Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green

RoHS Compliant

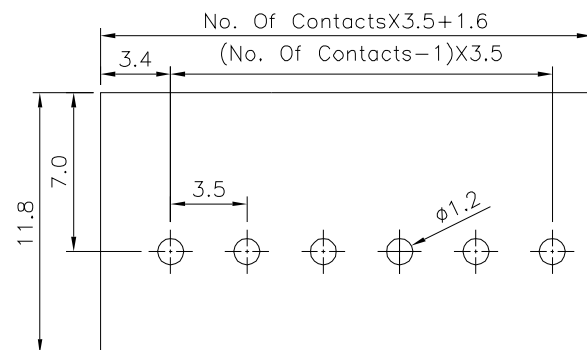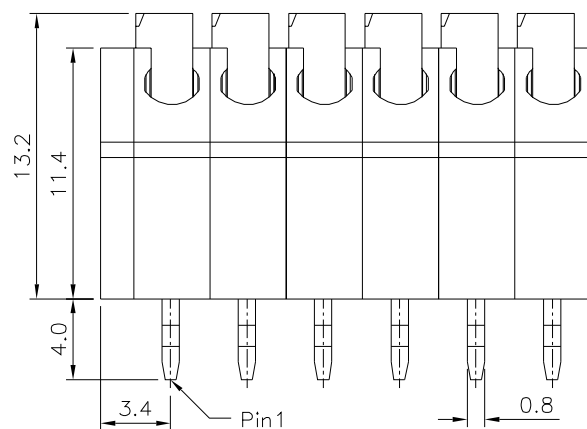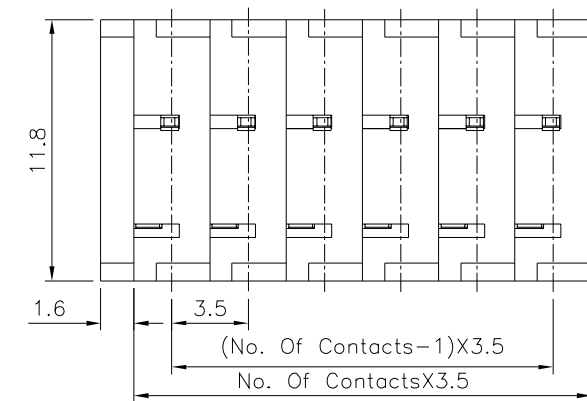

Recommended P.C.B. Layout

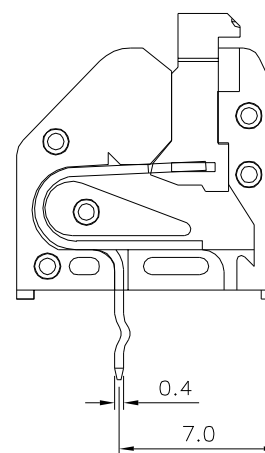

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22568

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

SCALE

NONE

REV.

A0

UNIT

mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

03/08/2015

DATE