

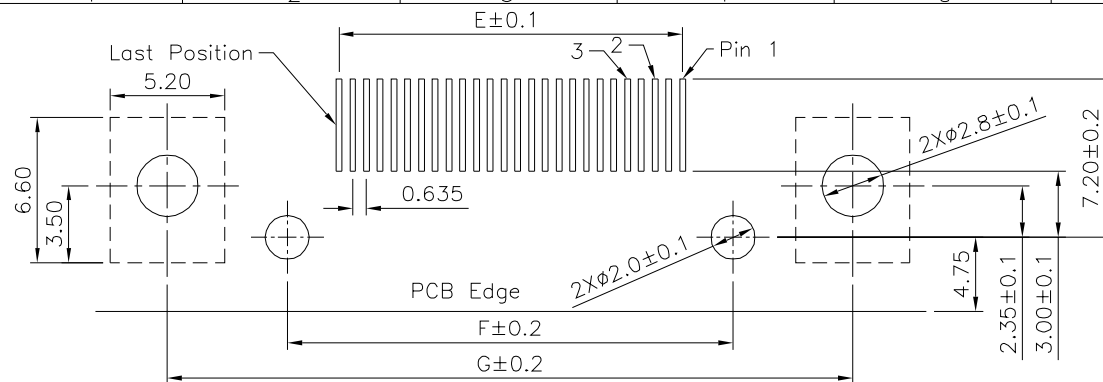
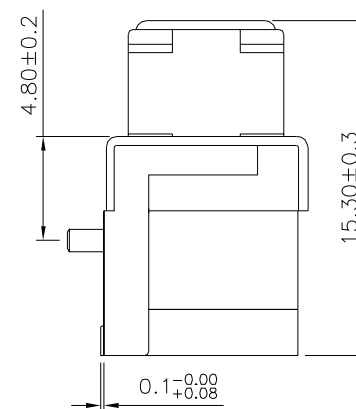


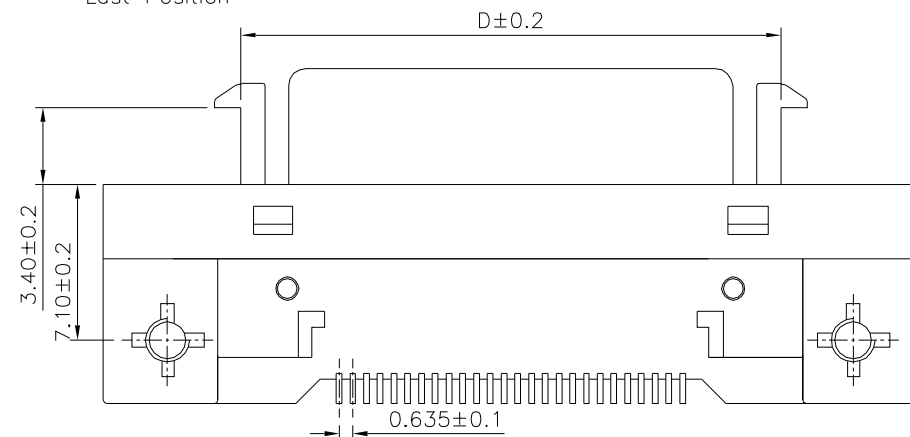

Recommended P.C.B. Layout

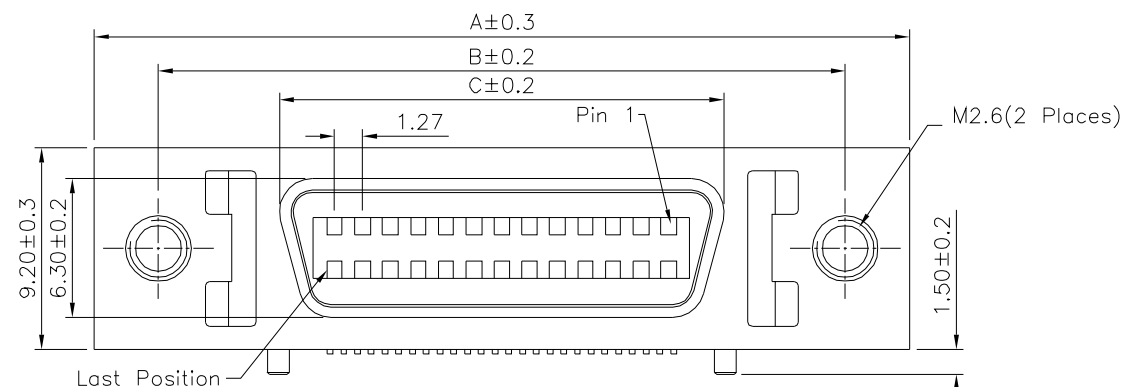

SPECIFICATION
 Current Rating:1 Amp
 Withstand Voltage:500V AC
 Contact Resistance:35 Milliohms Max.
 Insulation Resistance:>500 Megaohms Min.
 Operation Temperature Range:-55°C~+85°C
 Housing And Cover:PA9T(UL94V-0),Black
 Contact:Phosphor Bronze,Selective Gold Plated 5u"
 Front Shell:Steel,Nickel Plated Over Copper
 Bracket:Steel,Nickel Plated Over Copper
 RoHS Compliant

Pin	A	B	C	D	E	F	G
20	33.40	27.45	16.44	20.83	12.07	16.51	27.44
26	37.20	31.25	20.25	24.64	15.88	20.32	31.25
36	43.54	37.60	26.60	31.05	22.23	26.67	37.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22584

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

UNIT
 mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

11/23/2021