

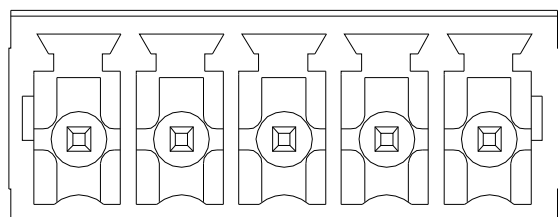


Recommended P.C.B. Layout

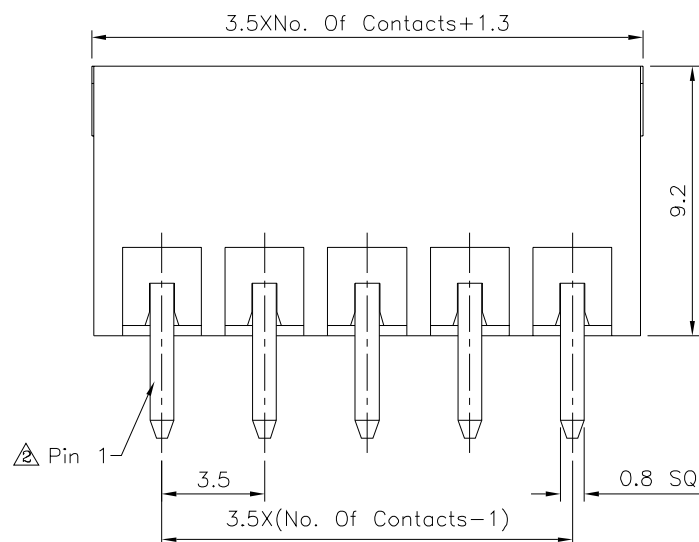

3/4

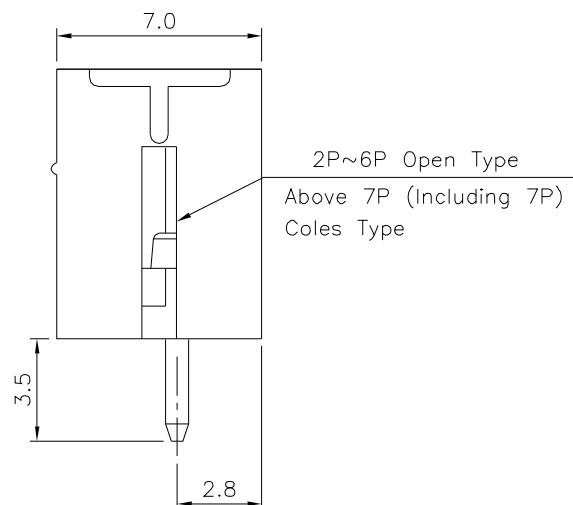

△ SPECIFICATION

Current Rating:12 Amp/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Test Time=60 Sec/1 PCS
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Black
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1

22590

SCALE

NONE

REV.

A4

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



4 A4

Modify Data

HZF

05/28/2012

3 A3

Modify Data

HZF

11/23/2011

2 A2

Modify Data

HZF

11/22/2011

1 A1

Modify Data

HZF

10/14/2011

0 A0

NEW RELEASE

HZF

04/07/2009

NO. REV.

REVISIONS

CHK

DATE