


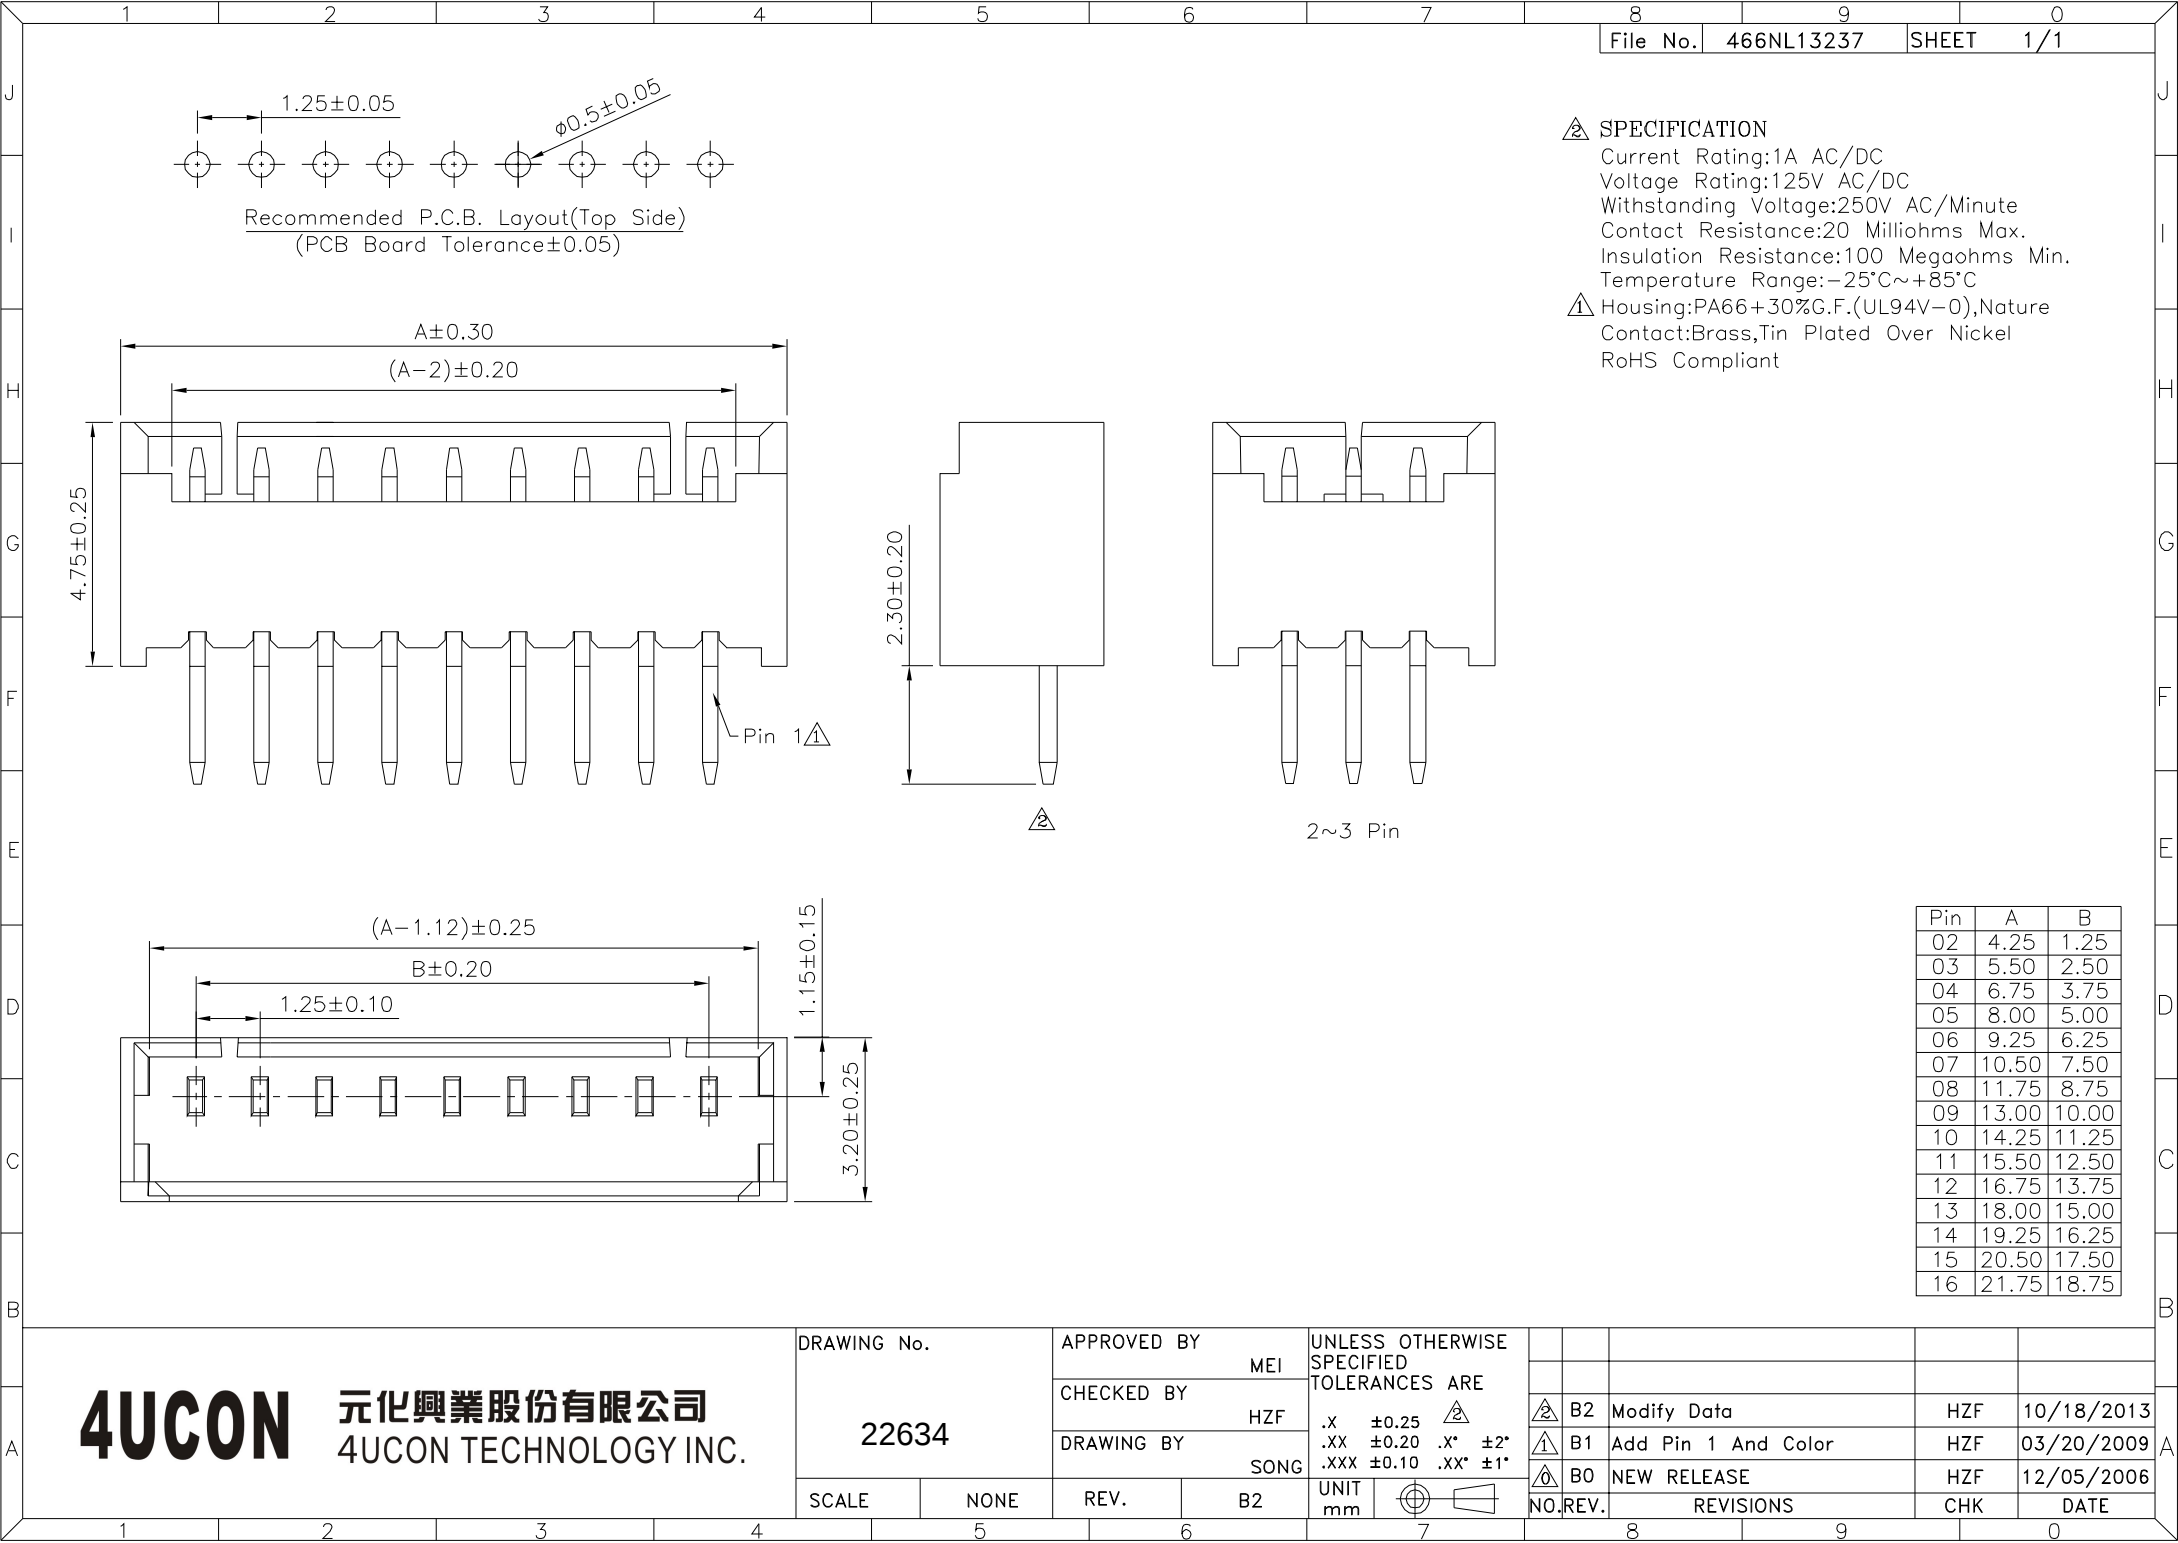

△ SPECIFICATION
Current Rating:1A AC/DC
Voltage Rating:125V AC/DC
Withstanding Voltage:250V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Temperature Range:-25°C~+85°C
⚠ Housing:PA66+30%G.F.(UL94V-0),Nature
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
		MEI							
		CHECKED BY							
		HZF							
22634		DRAWING BY		SONG					
		SCALE		NONE					
		REV.		B2					
		</							