

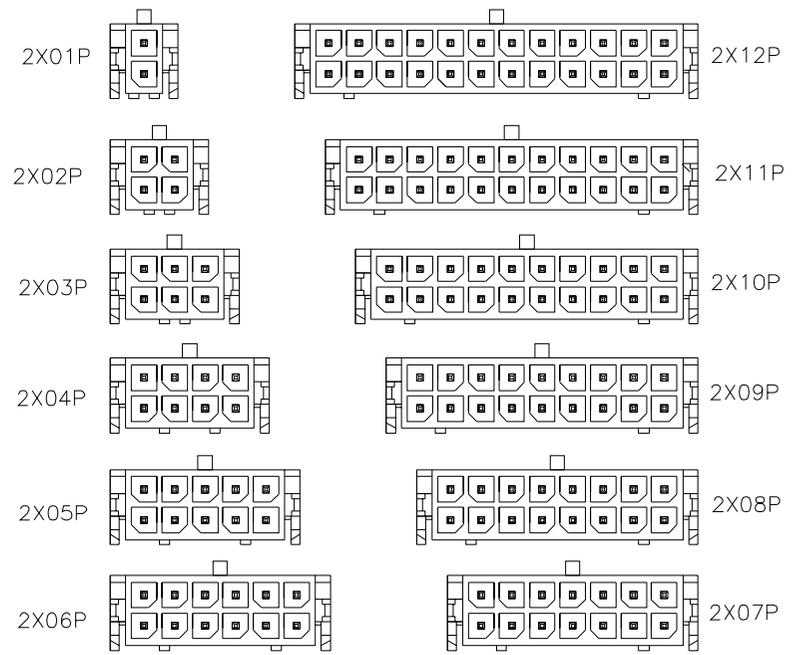
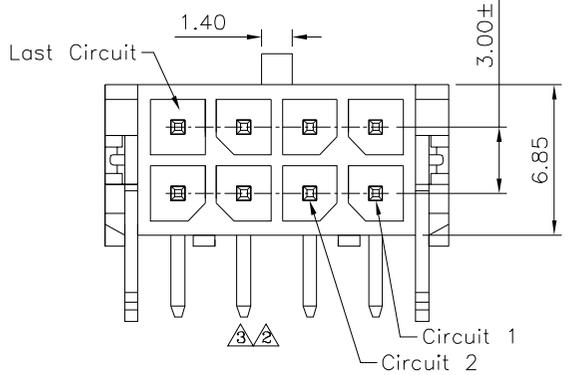
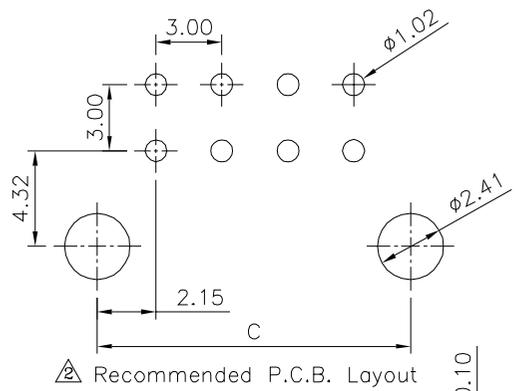


3 SPECIFICATION

- 1. Material & Finish
 Housing: PA66+15%G.F.(UL94V-0), Black
 Contact: Brass, Tin Plated
 Solder Tabs: Brass
- 2. Electrical Characteristics
 Current Rating: 5A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstand Voltage: 1500V AC/Minute
- 3. Environmental Characteristics
 Temperature Range: -25°C ~ +85°C
- 4. RoHS Compliant

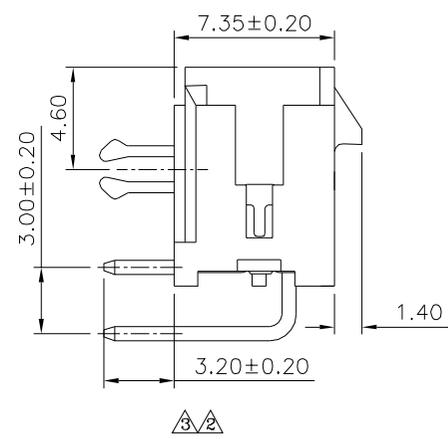

3 Circuit Size Layout

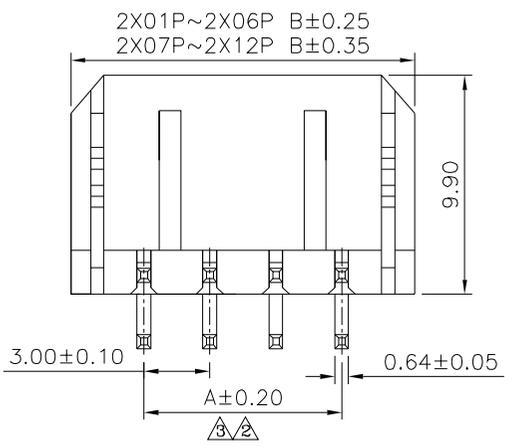

Pin	A	B	C
02		6.65	4.30
04	3.00	9.65	7.30
06	6.00	12.65	10.30
08	9.00	15.65	13.30
10	12.00	18.65	16.30
12	15.00	21.65	19.30
14	18.00	24.65	22.30
16	21.00	27.65	25.30
18	24.00	30.65	28.30
20	27.00	33.65	31.30
22	30.00	36.65	34.30
24	33.00	39.65	37.30

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 22642

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X: ±0.30
 X: ±0.25
 XX: ±0.20
 XXX: ±0.05
 ANG. ±1°

SCALE NONE REV. A3 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	03/01/2024
2	A2	Modify Data	HZF	02/21/2019
1	A1	Modify Data	HZF	07/11/2014
0	A0	NEW RELEASE	HZF	10/26/2012