
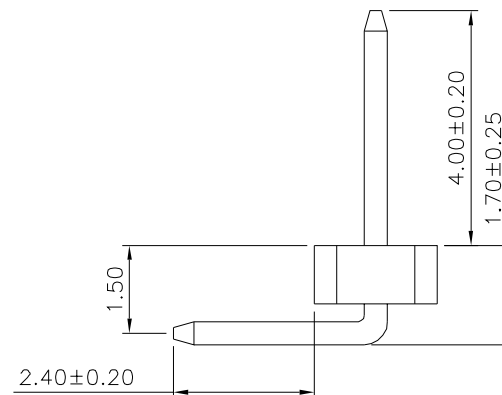
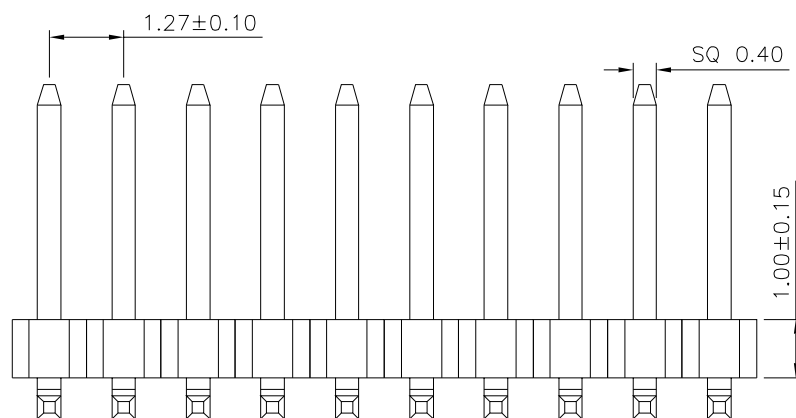


SPECIFICATION

Current Rating:1.0A
 Withstanding Voltage:500V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA9T(UL94V-0),Black
 RoHS Compliant

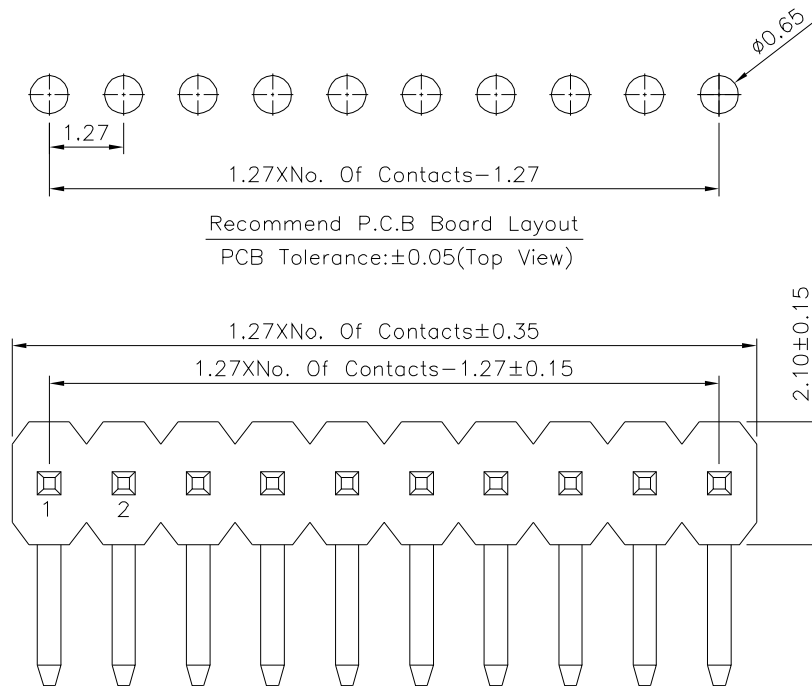

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22782

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LSM

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.30 X.* ±2*
 .X ±0.25 .X* ±1.5*
 .XX ±0.20 .XX* ±1.0*
 .XXX ±0.15 .XXX* ±0.5*

UNIT
 mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

11/25/2024