
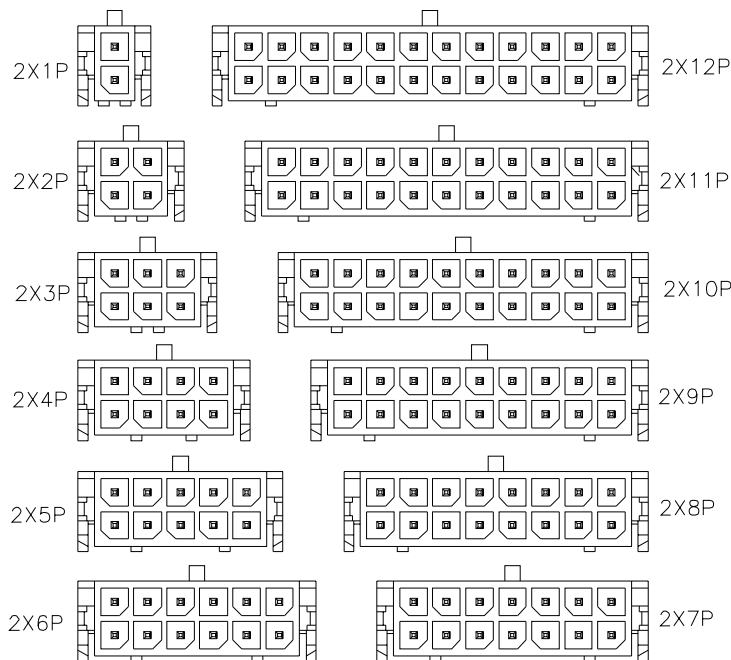
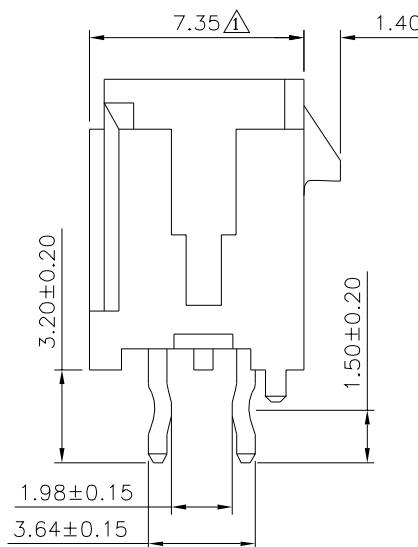
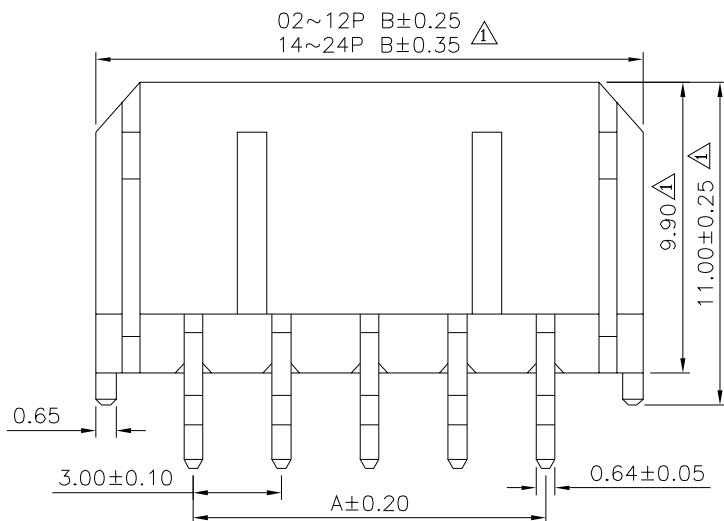


△ Recommended P.C.B. Layout

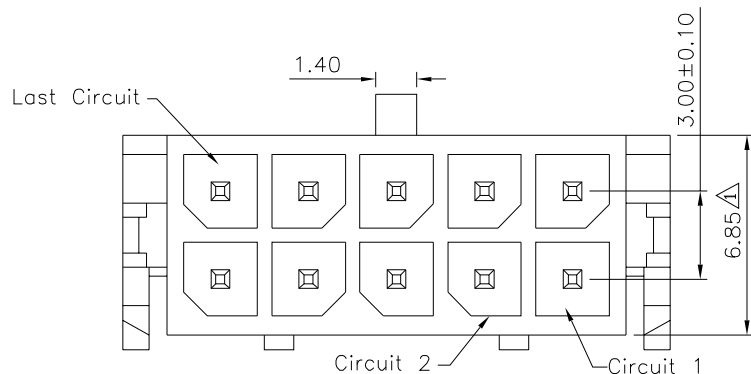

△ SPECIFICATION

1. Material & Finish

Insulator: LCP (UL94V-0), Black
Contact: Brass, Tin Plated

2. Electrical Characteristics

Current Rating: 5A AC, DC
Voltage Rating: 250V AC, DC
Withstanding Voltage: 1500V AC/Minute
Insulation Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.

3. Environmental Characteristics

Temperature Range: -40°C ~ +105°C

4. RoHS Compliant

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22785

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
X. ±0.25
X. ±0.20
XXX ±0.05
ANG. ±1°

UNIT
mm



△ A1

Modify Data

HZF

06/03/2020

△ A0

NEW RELEASE

HZF

11/04/2016

NO. REV.

REVISIONS

CHK

DATE