
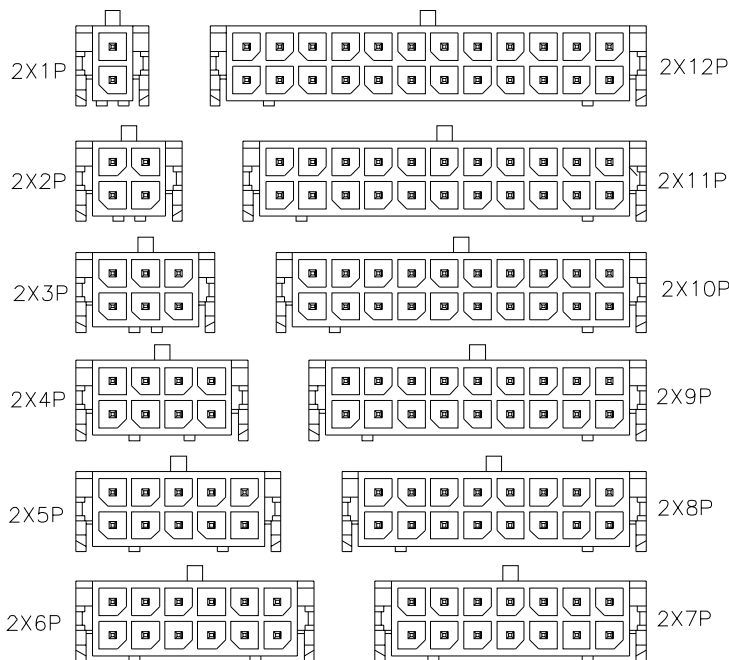
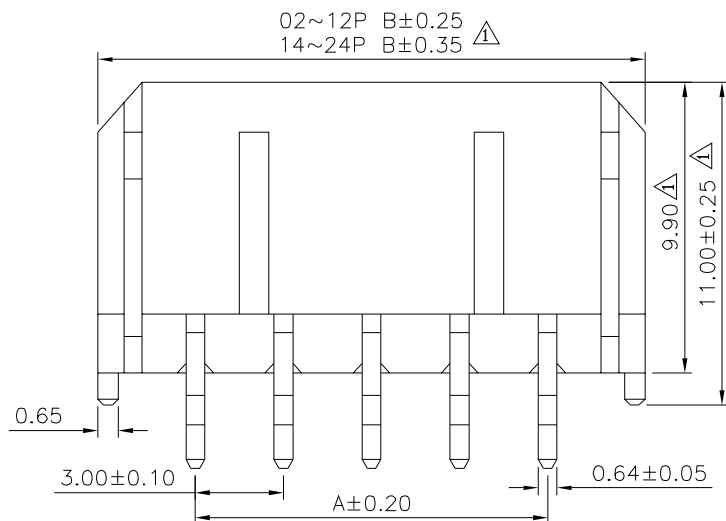


△ Recommended P.C.B. Layout

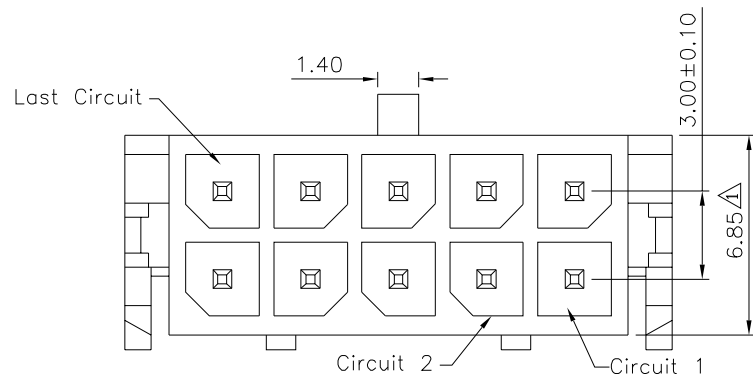

△ SPECIFICATION

1.Material&Finish

Insulator:LCP(UL94V-0),Black
Contact:Brass,Tin Plated


2.Electrical Characteristics

Current Rating:5A AC,DC
Voltage Rating:250V AC,DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.

3.Environmental Characteristics

Temperature Range:-40°C~+105°C

4.RoHS Compliant

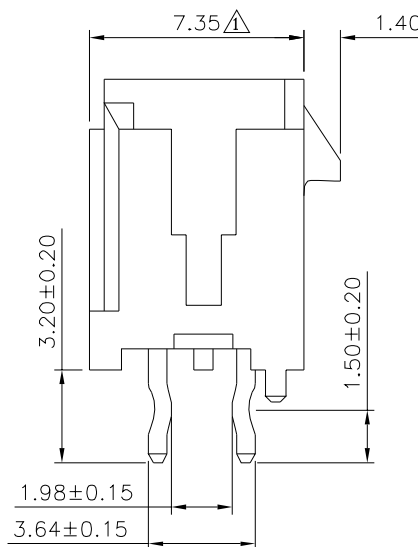

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22787

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
X. ±0.25
XX ±0.20
XXX ±0.05
ANG. ±1°

UNIT
mm



△ A1

Modify Data

HZF

06/03/2020

△ A0

NEW RELEASE

HZF

11/04/2016

NO. REV.

REVISIONS

CHK

DATE