
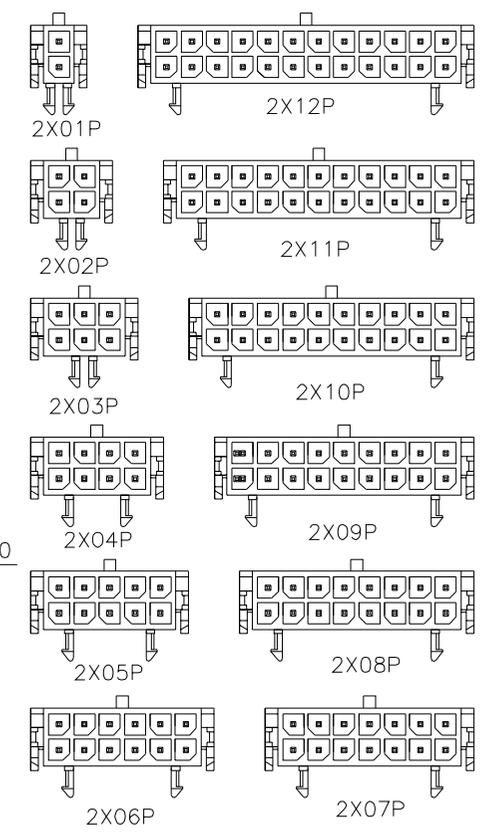
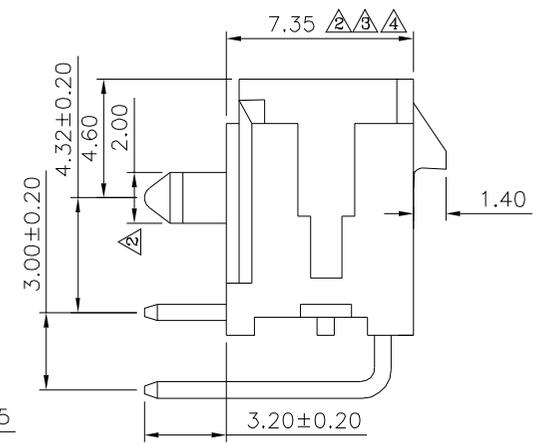
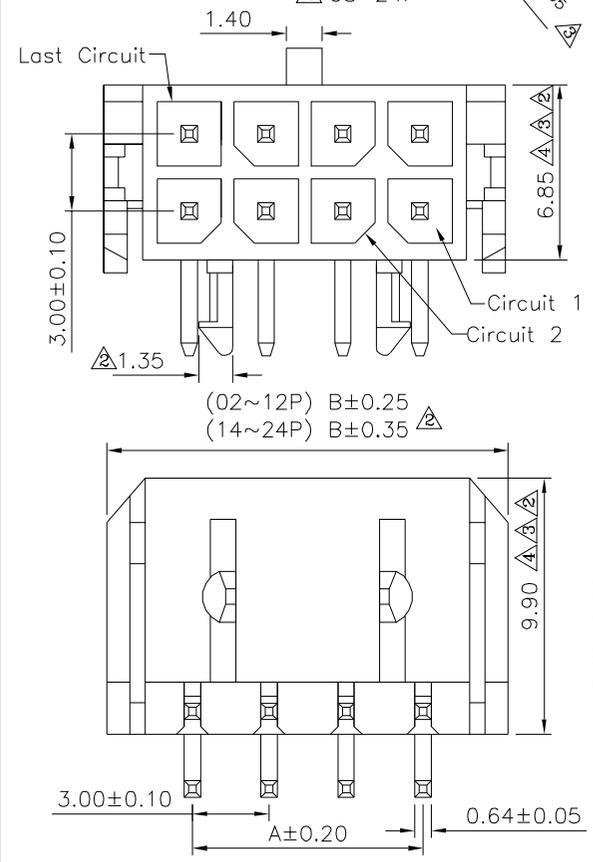


△ SPECIFICATION

1. Material & Finish
 Insulator: LCP (UL94V-0), Black
 Contact: Brass, Tin Plated Over Nickel
2. Electrical Characteristics
 Current Rating: 5A AC/DC
 Voltage Rating: 250V AC/DC
 Withstanding Voltage: 1500V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
3. Environmental Characteristics
 Temperature Range: -40°C ~ +105°C
4. RoHS Compliant

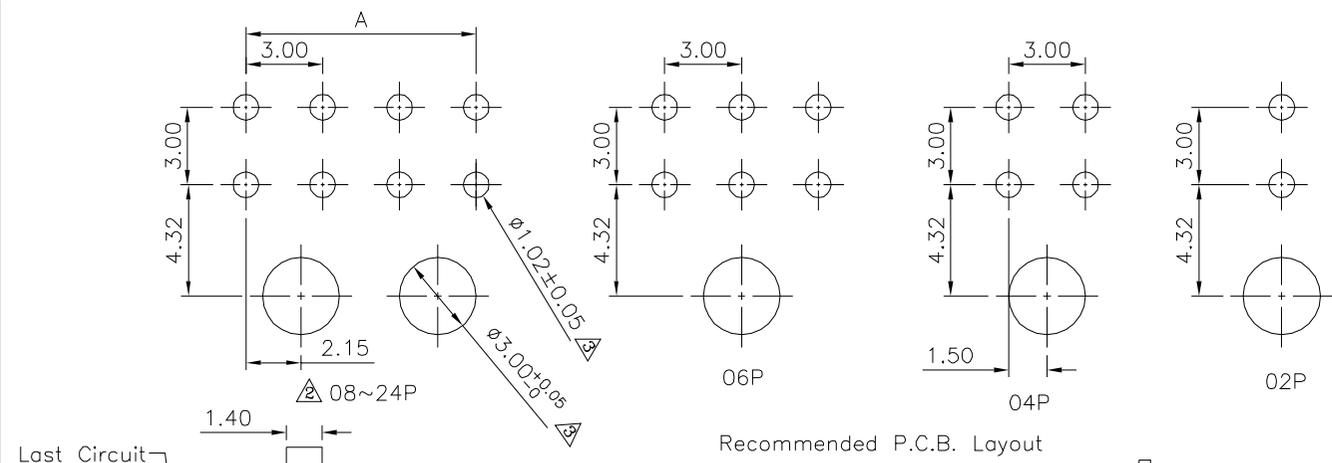

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.05 ANG. ±1°
22896		MEI	CYP	
		HZF		
SCALE	NONE	REV.	A4	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△4	A4	Modify Data	HZF	04/24/2024
△3	A3	Modify Data	HZF	06/09/2022
△2	A2	Modify Data	HZF	06/27/2019
△1	A1	Modify Spec.	HZF	11/05/2016
△0	A0	NEW RELEASE	HZF	11/05/2015