

△ SPECIFICATION

1.Material&Finish

Insulator:LCP(UL94V-0),Black
 △ Contact:Brass,Tin Plated Over Nickel





2.Electrical Characteristics

Current Rating:5A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.

3.Environmental Characteristics

Temperature Range:-40°C~+105°C

4.RoHS Compliant

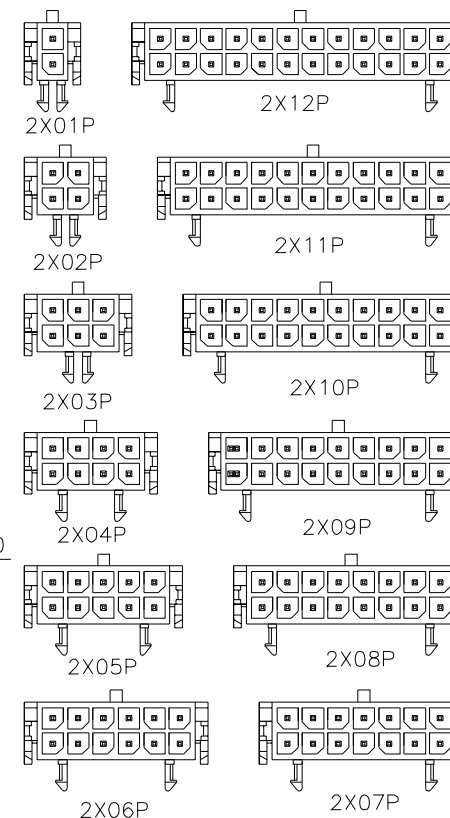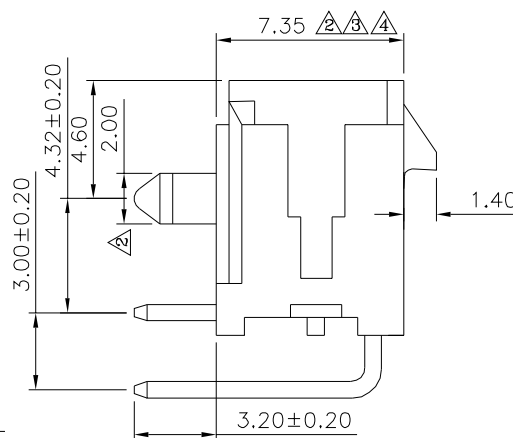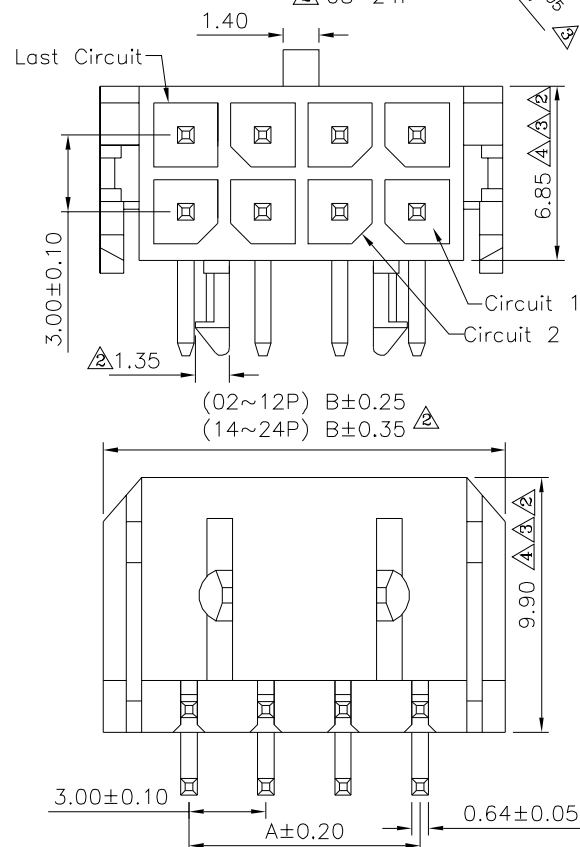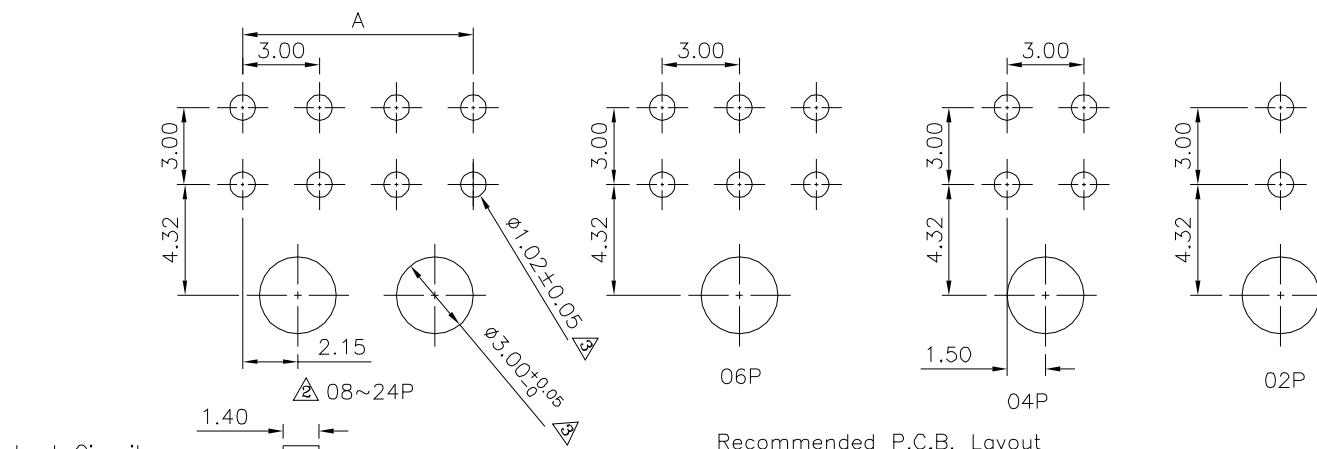

Pin	A	B
02	—	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22914

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.30
 .X ±0.25
 .XX ±0.20
 .XXX ±0.05
 ANG. ±1°

UNIT

mm



△ A4

Modify Data

HZF

04/24/2024

△ A3

Modify Data

HZF

06/09/2022

△ A2

Modify Data

HZF

06/27/2019

△ A1

Modify Spec.

HZF

11/05/2016

△ A0

NEW RELEASE

HZF

11/05/2015

NO. REV.

REVISIONS

CHK

DATE