
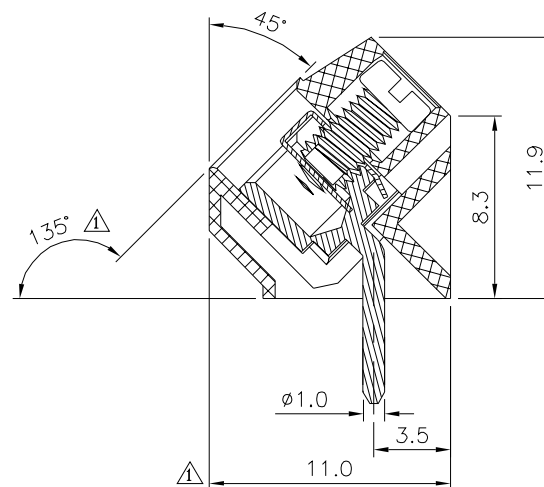
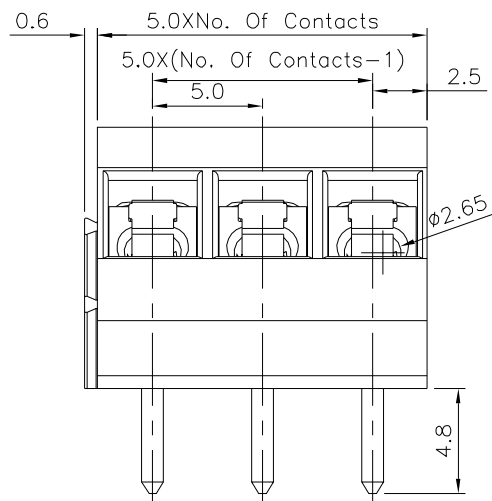
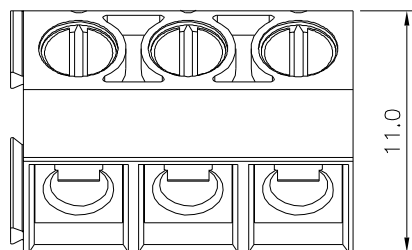


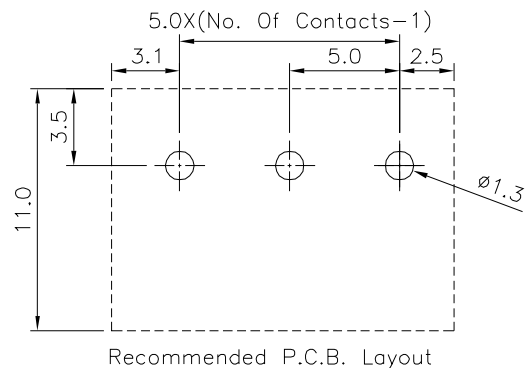

SPECIFICATION

Voltage Rating:300V AC
 Current Rating:15 Amps/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC(1Minute) Test
 Time=60 Sec/1 PCS
 Wire Range:14~22 AWG
 Torque:4.0 Kgf.cm/M2.6
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:
 Test Temperature=250°C±10°C/5 Seconds Max.
 Terminal:Copper Alloy,Tin Plated
 Screw:Steel,Galvanized With Cr3+ Plated
 Wire Guard:Stainless Steel
 ⚠ Insulator Body(Housing):Polyamide(UL94V-0),Blue
 RoHS Compliant
 * 02~24P Available~

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ⚠

22975

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

SCALE

NONE

REV.

A1

UNIT

mm



UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 X. ±1°

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1	Modify Data	HZF	04/23/2020	
⚠ A0	NEW RELEASE	HZF	10/18/2014	