




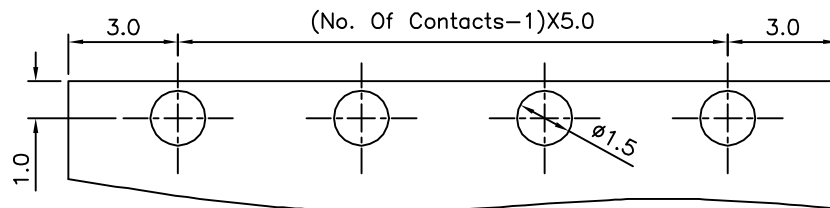


SPECIFICATION

Current Rating: 15A/Way Max.
 Voltage Rating: 250V AC
 Withstanding Voltage: 2500V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Wire Range: 14~24AWG
 Torque: 4.0 kgf.cm/M2.5
 Operation Temperature: -40°C~+105°C
 Contact: Copper Alloy, Tin Plated
 Screw: Steel, Galvanized With Cr3+ Plated
 Wire Guard: Stainless Steel
 Insulator: Polyamide(UL94V-0), Blue
 RoHS Compliant

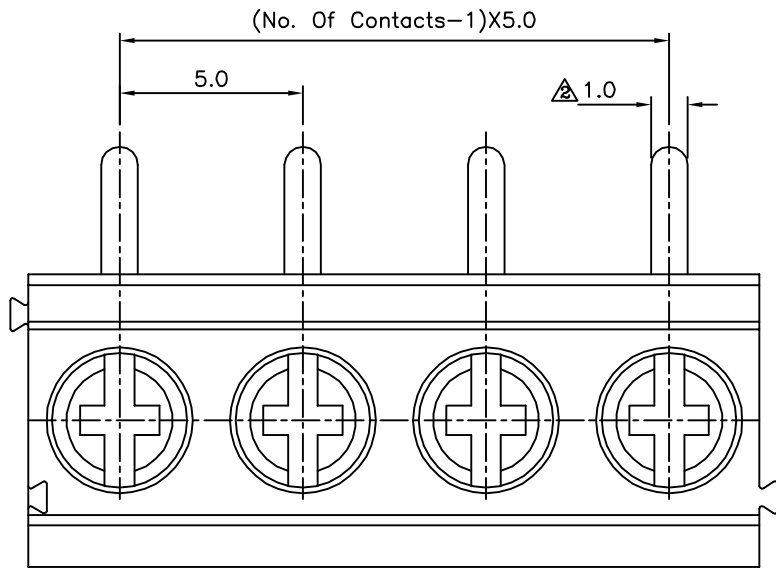

Recommended P.C.B. Layout

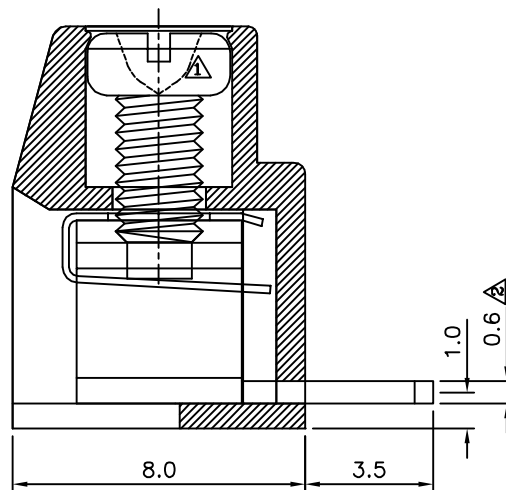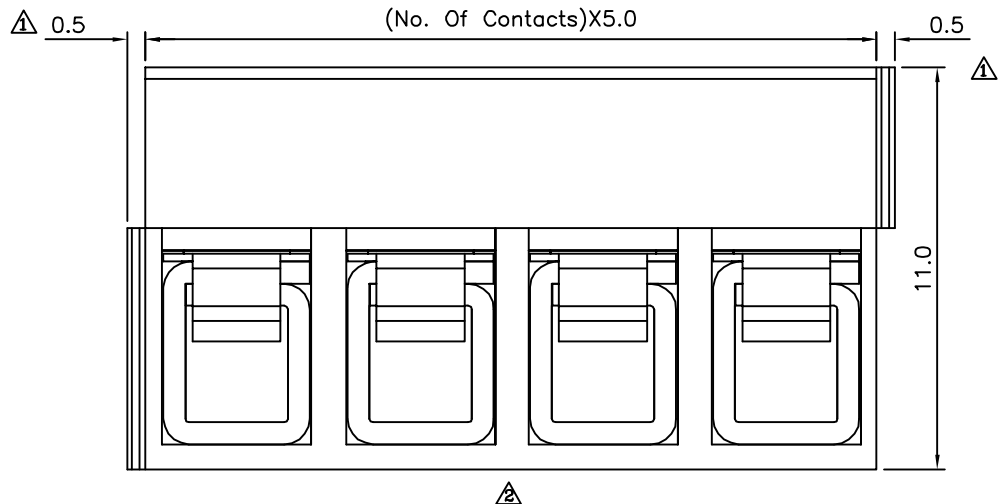

4UCON

元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22976

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HTP

REV.


A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 ANG. $\pm 1^\circ$

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	10/31/2023
A1		Modify Data	HZF	02/25/2012
A0		NEW RELEASE	HZF	03/17/2010