
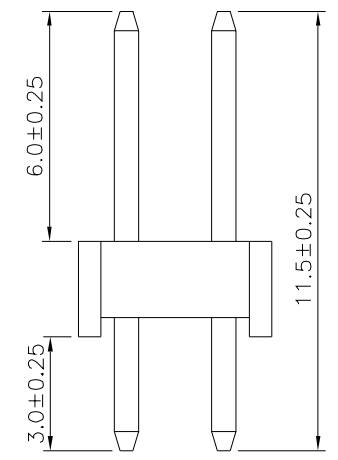
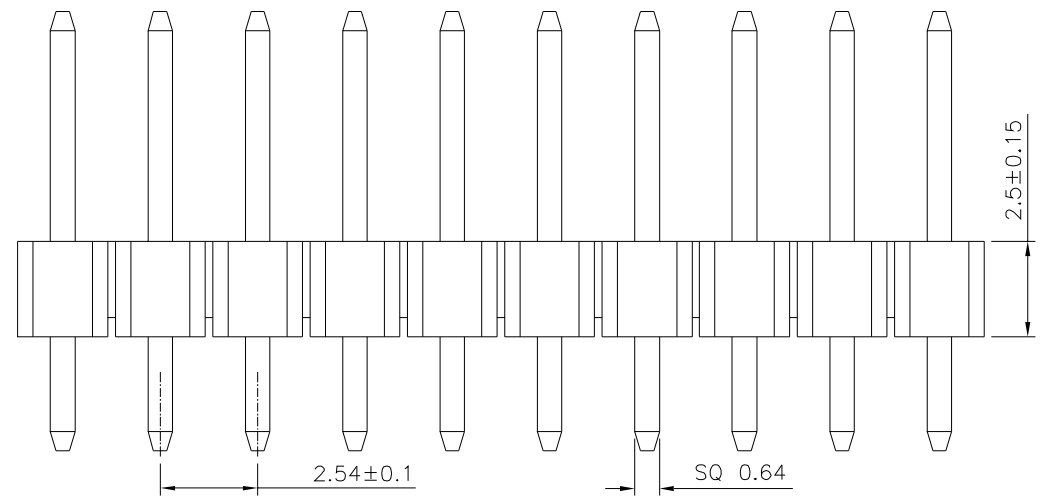


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

SPECIFICATION
 Current Rating:3 Amps
 ⚠️ Withstanding Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operation Temperature:-40°C~+105°C
 ⚠️ Housing:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

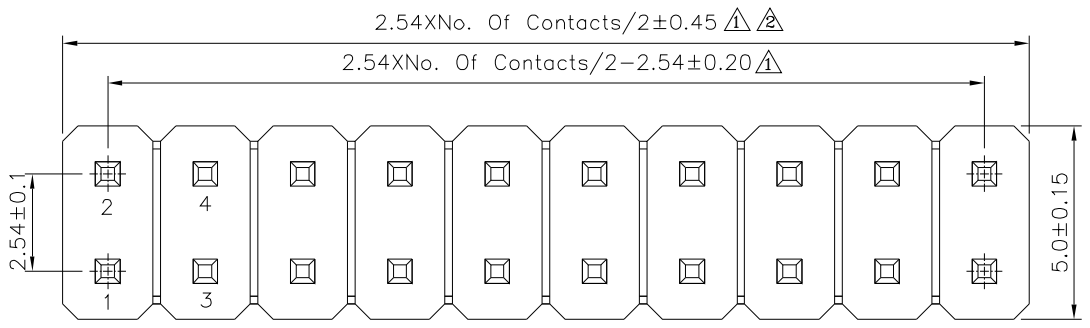

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .XX ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*
23083		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A3	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	06/29/2023
2	A2	Modify Data	HZF	01/04/2017
1	A1	Modify Data	HZF	11/03/2016
0	A0	NEW RELEASE	HZF	05/18/2013