
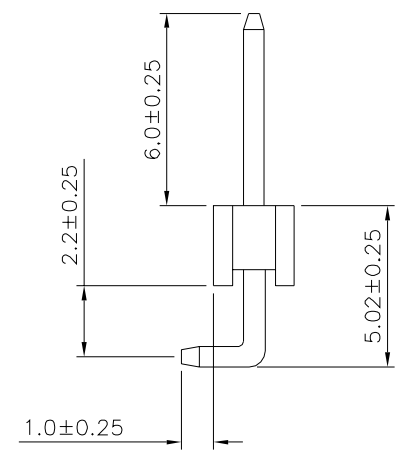
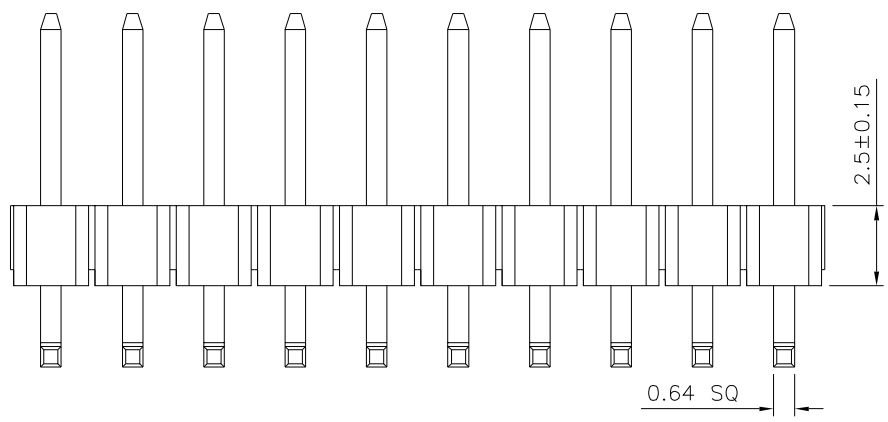


Recommend P.C.B Board Layout
PCB Tolerance: ± 0.05 (Top View)

SPECIFICATION
 Current Rating: 3A
 Withstand Voltage: 1000V AC Min./Minute
 Insulation Resistance: 1000 Megaohms Min.
 Contact Resistance: 20 Milliohms Max.
 Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Insulator: PA9T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

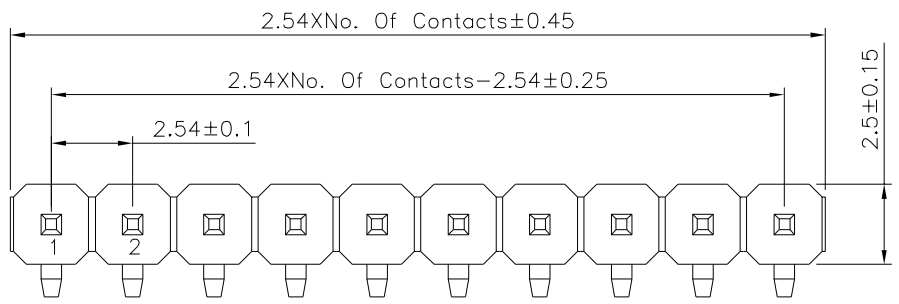

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
23111		Jason Wu			
		CHECKED BY			
		Leo Han			
DRAWING BY		X. ± 0.30		X.* $\pm 2^{\circ}$	
Michelle Lee		.X ± 0.25		.X* $\pm 1.5^{\circ}$	
		.XX ± 0.20		.XX* $\pm 1.0^{\circ}$	
		.XXX ± 0.15		.XXX* $\pm 0.5^{\circ}$	
SCALE	NONE	REV.	A0	UNIT	mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HFZ	06/05/2026
		REVISIONS		