



Recommended P.C.B. Layout

△△ SPECIFICATION


Voltage Rating:300V AC
 Current Rating:10A/Way Max.
 △ Withstanding Voltage:2500V AC(1 Minute) Test
 Time=60s/1 Pcs
 Operation Temperature:-40°C~+105°C
 Solder Pin:Copper Alloy,Tin Plated
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Black
 * 02~24P Available~
 RoHS Compliant

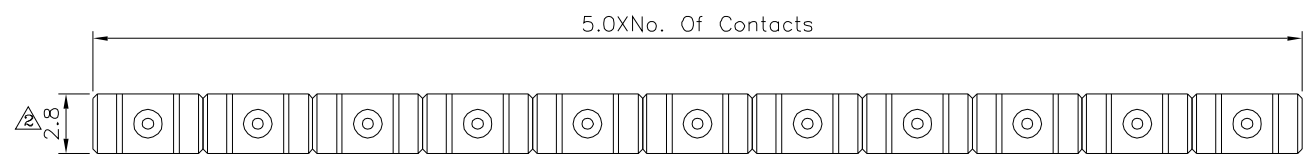

△

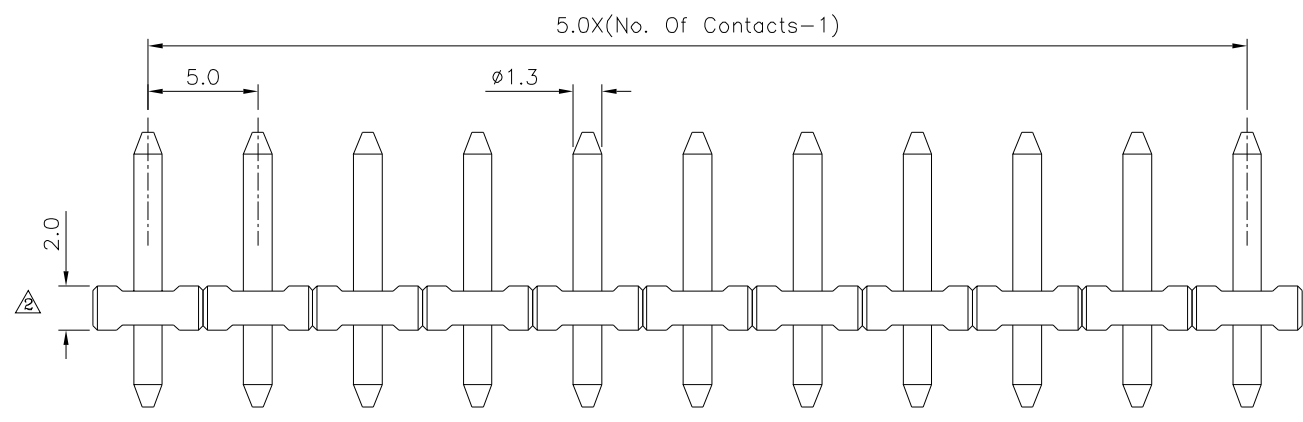

△



△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|-----|---|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.50 .X ± 0.30 .XX ± 0.20 ANG. $\pm 1^\circ$ |
| 05351 | | MEI | | |
| | | CHECKED BY | HZF | |
| | | DRAWING BY | CYP | |
| SCALE | NONE | REV. | A4 | UNIT mm |

| | | | |
|---------|-------------|-----|------------|
| △ A4 | Modify Data | HZF | 09/19/2023 |
| △ A3 | Modify Data | HZF | 03/23/2017 |
| △ A2 | Modify Data | HZF | 05/30/2013 |
| △ A1 | Modify Data | HZF | 01/10/2011 |
| △ A0 | NEW RELEASE | HZF | 04/29/2009 |
| NO.REV. | REVISIONS | CHK | DATE |