
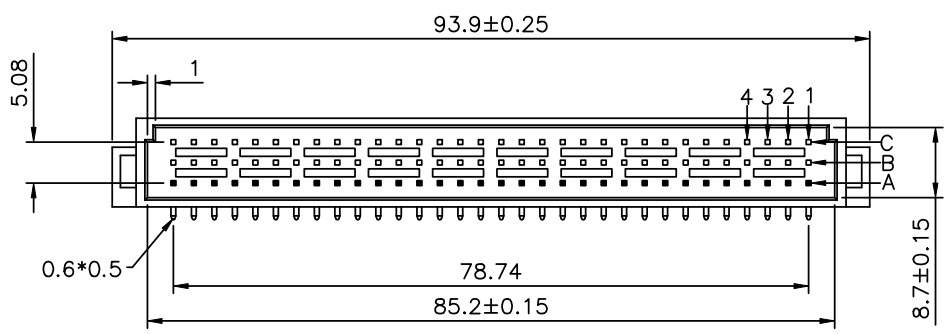

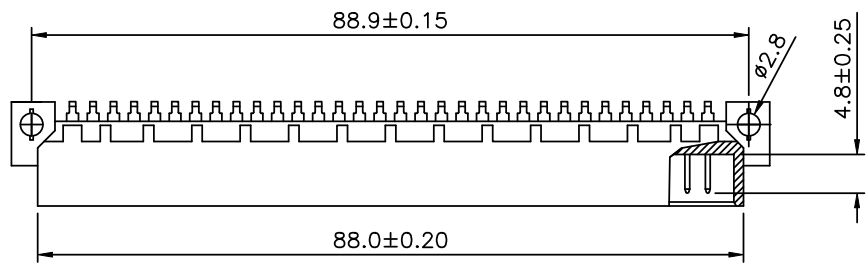


SPECIFICATIONS

Current Rating:2Amp
 Dielectric Withstanding Voltage:AC 1000V For 1Minute
 Insulator Resistance:1000Megohms Min At DC 500V
 Contact Resistance:30Milliohm Max At DC 100mA
 Operating Temperature:-55°C~+105°C
 Housing:30% Glass Filled PBT UL94V-0
 Contacts:Brass
 Gold/Tin Plated
 RoHS Compliant

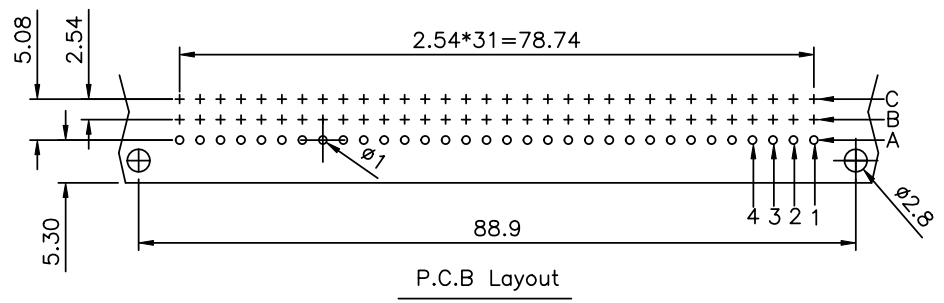

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
05606		MEI		
		HZF		
		DRAWING BY		
		PEGA		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	03/01/2008