
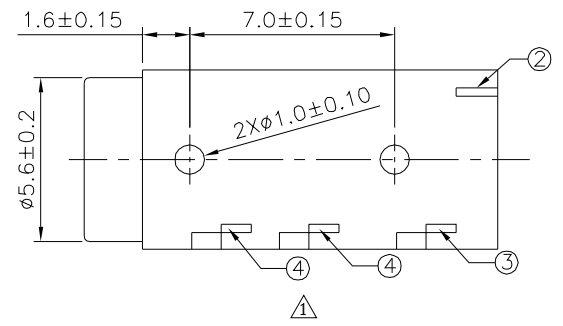


**△ SPECIFICATION**


Rating:30V 0.5A DC  
 Withstand Voltage:500V AC  
 Contact Resistance:50 Milliohms Max.  
 After Test:100 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min. (500V DC)  
 After Test:50 Megaohms Min.  
 Insertion And Extraction Force:3~30N  
 Life Test:5000 Cycles Min.  
 Operation Temperature Range:-20°C~+70°C  
 Storage Temperature Range:-40°C~+85°C  
 RoHS Compliant

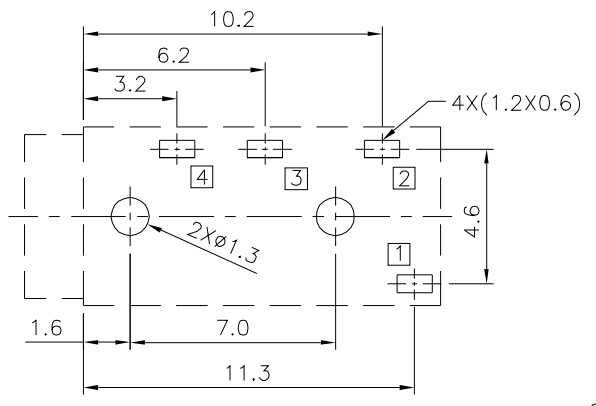

**△**


No.	Description	Q'ty	Material	Remark
①	Housing	1	PBT	Black
②	Earth Spring	1	Stainless Steel	Silver Plated
③	Tip Spring	1	Phosphor Bronze	Silver Plated
④	Ring Spring	2	Phosphor Bronze	Silver Plated

△ Recommended P.C.B. Layout(Top View)

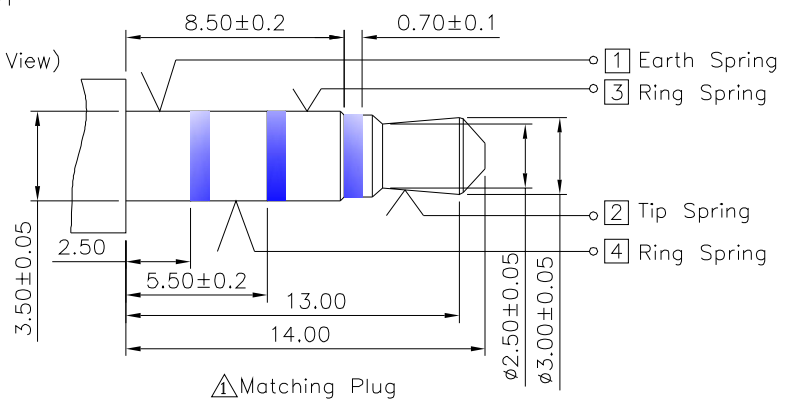

△ Matching Plug

△ □ :Terminal No. ○ :Item No.

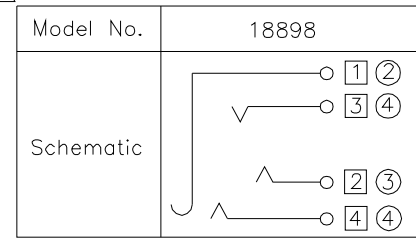

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 18898

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY GAO  
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.3  
 .X ±0.3  
 .XX ±0.3  
 ANG. ±2°

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	06/21/2013
△ A0		NEW RELEASE	BECKY	01/05/2005

SCALE NONE REV. A1 UNIT mm